HISTORIC AND DESIGN REVIEW COMMISSION July 18, 2018

HDRC CASE NO:	2018-330
COMMON NAME:	622 MUNCEY
LEGAL DESCRIPTION:	NCB 1302 BLK 3 LOT S 50 FT OF 1 & 2
ZONING:	R-5, H
CITY COUNCIL DIST.:	2
DISTRICT:	Dignowity Hill Historic District
APPLICANT:	Cy Goudge/JCG Homes, LLC
OWNER:	Cy Goudge/JCG Homes, LLC
TYPE OF WORK:	Construction of a single story, single family residential structure
APPLICATION RECEIVED:	June 18, 2018
60-DAY REVIEW:	August 17, 2018

REQUEST:

The applicant is requesting a Certificate of Appropriateness for approval to construct a single story, single family residential structure on the vacant lot at 622 Muncey, located within the Dignowity Hill Historic District.

APPLICABLE CITATIONS:

Historic Design Guidelines, Chapter 4, Guidelines for New Construction

1. Building and Entrance Orientation

A. FAÇADE ORIENTATION

i. Setbacks—Align front facades of new buildings with front facades of adjacent buildings where a consistent setback has been established along the street frontage. Use the median setback of buildings along the street frontage where a variety of setbacks exist. Refer to UDC Article 3, Division 2. Base Zoning Districts for applicable setback requirements. *ii. Orientation*—Orient the front façade of new buildings to be consistent with the predominant orientation of historic buildings along the street frontage.

B. ENTRANCES

i. Orientation—Orient primary building entrances, porches, and landings to be consistent with those historically found along the street frontage. Typically, historic building entrances are oriented towards the primary street.

2. Building Massing and Form

A. SCALE AND MASS

i. Similar height and scale—Design new construction so that its height and overall scale are consistent with nearby historic buildings. In residential districts, the height and scale of new construction should not exceed that of the majority of historic buildings by more than one-story. In commercial districts, building height shall conform to the established pattern. If there is no more than a 50% variation in the scale of buildings on the adjacent block faces, then the height of the new building shall not exceed the tallest building on the adjacent block face by more than 10%.

ii. Transitions—Utilize step-downs in building height, wall-plane offsets, and other variations in building massing to provide a visual transition when the height of new construction exceeds that of adjacent historic buildings by more than one-half story.

iii. Foundation and floor heights—Align foundation and floor-to-floor heights (including porches and balconies) within one foot of floor-to-floor heights on adjacent historic structures.

B. ROOF FORM

i. Similar roof forms—Incorporate roof forms—pitch, overhangs, and orientation—that are consistent with those predominantly found on the block. Roof forms on residential building types are typically sloped, while roof forms on nonresidential

building types are more typically flat and screened by an ornamental parapet wall.

ii. Façade configuration—The primary façade of new commercial buildings should be in keeping with established

patterns. Maintaining horizontal elements within adjacent cap, middle, and base precedents will establish a consistent street wall through the alignment of horizontal parts. Avoid blank walls, particularly on elevations visible from the street. No new façade should exceed 40 linear feet without being penetrated by windows, entryways, or other defined bays.

D. LOT COVERAGE

i. Building to lot ratio—New construction should be consistent with adjacent historic buildings in terms of the building to lot ratio. Limit the building footprint for new construction to no more than 50 percent of the total lot area, unless adjacent historic buildings establish a precedent with a greater building to lot ratio.

3. Materials and Textures

A. NEW MATERIALS

i. *Complementary materials*—Use materials that complement the type, color, and texture of materials traditionally found in the district. Materials should not be so dissimilar as to distract from the historic interpretation of the district. For example, corrugated metal siding would not be appropriate for a new structure in a district comprised of homes with wood siding.

ii. Alternative use of traditional materials—Consider using traditional materials, such as wood siding, in a new way to provide visual interest in new construction while still ensuring compatibility.

iii. Roof materials—Select roof materials that are similar in terms of form, color, and texture to traditionally used in the district.

iv. Metal roofs—Construct new metal roofs in a similar fashion as historic metal roofs. Refer to the Guidelines for Alterations and Maintenance section for additional specifications regarding metal roofs.

v. Imitation or synthetic materials—Do not use vinyl siding, plastic, or corrugated metal sheeting. Contemporary materials not traditionally used in the district, such as brick or simulated stone veneer and Hardie Board or other fiberboard siding, may be appropriate for new construction in some locations as long as new materials are visually similar to the traditional material in dimension, finish, and texture. EIFS is not recommended as a substitute for actual stucco.

4. Architectural Details

A. GENERAL

i. Historic context—Design new buildings to reflect their time while respecting the historic context. While new construction should not attempt to mirror or replicate historic features, new structures should not be so dissimilar as to distract from or diminish the historic interpretation of the district.

ii. Architectural details—Incorporate architectural details that are in keeping with the predominant architectural style along the block face or within the district when one exists. Details should be simple in design and should complement, but not visually compete with, the character of the adjacent historic structures or other historic structures within the district. Architectural details that are more ornate or elaborate than those found within the district are inappropriate.

iii. Contemporary interpretations—Consider integrating contemporary interpretations of traditional designs and details for new construction. Use of contemporary window moldings and door surroundings, for example, can provide visual interest while helping to convey the fact that the structure is new. Modern materials should be implemented in a way that does not distract from the historic structure.

5. Garages and Outbuildings

A. DESIGN AND CHARACTER

v. Garage doors—Incorporate garage doors with similar proportions and materials as those traditionally found in the district.

6. Mechanical Equipment and Roof Appurtenances

A. LOCATION AND SITING

i. Visibility—Do not locate utility boxes, air conditioners, rooftop mechanical equipment, skylights, satellite dishes, and other roof appurtenances on primary facades, front-facing roof slopes, in front yards, or in other locations that are clearly visible from the public right-of-way.

ii. Service Areas—Locate service areas towards the rear of the site to minimize visibility from the public right-of-way.

B. SCREENING

i. Building-mounted equipment—Paint devices mounted on secondary facades and other exposed hardware, frames, and piping to match the color scheme of the primary structure or screen them with landscaping.

ii. Freestanding equipment—Screen service areas, air conditioning units, and other mechanical equipment from public view using a fence, hedge, or other enclosure.

iii. Roof-mounted equipment—Screen and set back devices mounted on the roof to avoid view from public right-of-way. Historic Design Guidelines, Chapter 5, Guidelines for Site Elements

B. NEW FENCES AND WALLS

i. Design—New fences and walls should appear similar to those used historically within the district in terms of their scale, transparency, and character. Design of fence should respond to the design and materials of the house or main structure. *ii. Location*—Avoid installing a fence or wall in a location where one did not historically exist, particularly within the front yard. The appropriateness of a front yard fence or wall is dependent on conditions within a specific historic district. New front yard fences or wall should not be introduced within historic districts that have not historically had them. *iii. Height*—Limit the height of new fences and walls within the front yard to a maximum of four feet. The appropriateness of a front yard fence is dependent on conditions within a specific historic district. New front yard fence is dependent on conditions within a specific historic district. New front yard fence is dependent on conditions within a specific historic district. New front yard fences should not be introduced. The house of a front yard fence is dependent on conditions within a specific historic district. New front yard fences should not be introduced within historic districts that have not historically had them. If a taller fence or wall existed historically, additional height may be considered. The height of a new retaining wall should not exceed the height of the slope it retains.

iv. Prohibited materials—Do not use exposed concrete masonry units (CMU), Keystone or similar interlocking retaining wall systems, concrete block, vinyl fencing, or chain link fencing.

v. Appropriate materials—Construct new fences or walls of materials similar to fence materials historically used in the district. Select materials that are similar in scale, texture, color, and form as those historically used in the district, and that are compatible with the main structure. Screening incompatible uses—Review alternative fence heights and materials for appropriateness where residential properties are adjacent to commercial or other potentially incompatible uses.

3. Landscape Design

A. PLANTINGS

i. Historic Gardens- Maintain front yard gardens when appropriate within a specific historic district.

ii. Historic Lawns—Do not fully remove and replace traditional lawn areas with impervious hardscape. Limit the removal of lawn areas to mulched planting beds or pervious hardscapes in locations where they would historically be found, such as along fences, walkways, or drives. Low-growing plantings should be used in historic lawn areas; invasive or large-scale species should be avoided. Historic lawn areas should never be reduced by more than 50%.

iii. Native xeric plant materials—Select native and/or xeric plants that thrive in local conditions and reduce watering usage. See UDC Appendix E: San Antonio Recommended Plant List—All Suited to Xeriscape Planting Methods, for a list of appropriate materials and planting methods. Select plant materials with a similar character, growth habit, and light requirements as those being replaced.

iv. Plant palettes—If a varied plant palette is used, incorporate species of taller heights, such informal elements should be restrained to small areas of the front yard or to the rear or side yard so as not to obstruct views of or otherwise distract from the historic structure.

v. Maintenance—Maintain existing landscape features. Do not introduce landscape elements that will obscure the historic structure or are located as to retain moisture on walls or foundations (e.g., dense foundation plantings or vines) or as to cause damage.

B. ROCKS OR HARDSCAPE

i. Impervious surfaces —Do not introduce large pavers, asphalt, or other impervious surfaces where they were not historically located.

ii. Pervious and semi-pervious surfaces—New pervious hardscapes should be limited to areas that are not highly visible, and should not be used as wholesale replacement for plantings. If used, small plantings should be incorporated into the design.

iii. Rock mulch and gravel - Do not use rock mulch or gravel as a wholesale replacement for lawn area. If used, plantings should be incorporated into the design.

D. TREES

i. Preservation—Preserve and protect from damage existing mature trees and heritage trees. See UDC Section 35-523 (Tree Preservation) for specific requirements.

ii. New Trees – Select new trees based on site conditions. Avoid planting new trees in locations that could potentially cause damage to a historic structure or other historic elements. Species selection and planting procedure should be done in accordance with guidance from the City Arborist.

5. Sidewalks, Walkways, Driveways, and Curbing

A. SIDEWALKS AND WALKWAYS

i. Maintenance—Repair minor cracking, settling, or jamming along sidewalks to prevent uneven surfaces. Retain and repair historic sidewalk and walkway paving materials—often brick or concrete—in place.

ii. Replacement materials—Replace those portions of sidewalks or walkways that are deteriorated beyond repair. Every effort should be made to match existing sidewalk color and material.

iii. Width and alignment—Follow the historic alignment, configuration, and width of sidewalks and walkways. Alter the historic width or alignment only where absolutely necessary to accommodate the preservation of a significant tree. *iv. Stamped concrete*—Preserve stamped street names, business insignias, or other historic elements of sidewalks and walkways when replacement is necessary.

v. ADA compliance—Limit removal of historic sidewalk materials to the immediate intersection when ramps are added to address ADA requirements.

B. DRIVEWAYS

i. Driveway configuration—Retain and repair in place historic driveway configurations, such as ribbon drives. Incorporate a similar driveway configuration—materials, width, and design—to that historically found on the site. Historic driveways are typically no wider than 10 feet. Pervious paving surfaces may be considered where replacement is necessary to increase stormwater infiltration.

ii. Curb cuts and ramps—Maintain the width and configuration of original curb cuts when replacing historic driveways. Avoid introducing new curb cuts where not historically found.

7. Off-Street Parking

A. LOCATION

i. Preferred location—Place parking areas for non-residential and mixed-use structures at the rear of the site, behind primary structures to hide them from the public right-of-way. On corner lots, place parking areas behind the primary structure and set them back as far as possible from the side streets. Parking areas to the side of the primary structure are acceptable when location behind the structure is not feasible. See UDC Section 35-310 for district-specific standards. *ii. Front*—Do not add off-street parking areas within the front yard setback as to not disrupt the continuity of the streetscape.

iii. Access—Design off-street parking areas to be accessed from alleys or secondary streets rather than from principal streets whenever possible.

B. DESIGN

i. Screening—Screen off-street parking areas with a landscape buffer, wall, or ornamental fence two to four feet high—or a combination of these methods. Landscape buffers are preferred due to their ability to absorb carbon dioxide. See UDC Section 35-510 for buffer requirements.

ii. Materials—Use permeable parking surfaces when possible to reduce run-off and flooding. See UDC Section 35-526(j) for specific standards.

iii. Parking structures—Design new parking structures to be similar in scale, materials, and rhythm of the surrounding historic district when new parking structures are necessary.

FINDINGS:

- a. The applicant is requesting a Certificate of Appropriateness for approval to construct a single story, single family residential structure on the vacant lot at 622 Muncey, located within the Dignowity Hill Historic District.
- b. SETBACKS & ORIENTATION According to the Guidelines for New Construction, the front facades of new

buildings are to align with front facades of adjacent buildings where a consistent setback has been established along the street frontage. Additionally, the orientation of new construction should be consistent with the historic examples found on the block. The applicant has proposed a setback of 13' - 6'' from the property line. The historic structure to the immediate south features a setback of approximately ten (10) feet from the property line while the structure to the north features a setback of approximately twenty-six (26) inches. Staff finds that the proposed setback should be increased to be subordinate to that of both historic structures.

- c. ENTRANCES According to the Guidelines for New Construction 1.B.i, primary building entrance should be oriented towards the primary street. The applicant's proposed entrance orientation is consistent with the Guidelines.
- d. SCALE & MASS Per the Guidelines for New Construction 2.A.i., a height and massing similar to historic structures in the vicinity of the proposed new construction should be used. In residential districts, the height and scale of new construction should not exceed that of the majority of historic buildings by more than one-story. This block of Muncey features historic structures that feature one story in height. The proposed new construction is consistent with the Guidelines in regards to scale and mass.
- e. FOUNDATION & FLOOR HEIGHTS According to the Guidelines for New Construction 2.A.iii., foundation and floor heights should be aligned within one (1) foot of neighboring structure's foundation and floor heights. The applicant has noted a foundation height of 1' 6" and a floor to ceiling height of ten (10) feet. This is consistent with the Guidelines.
- f. ROOF FORM The applicant has proposed both hipped and gabled roofs. The proposed roof forms are found predominantly throughout the Dignowity Hill Historic District. The proposed roof forms are consistent with the Guidelines.
- g. WINDOW & DOOR OPENINGS Per the Guidelines for New Construction 2.C.i., window and door openings with similar proportions of wall to window space as typical with nearby historic facades should be incorporated into new construction. Generally, the applicant has proposed window and door openings that feature similar proportions to those found historically within the Dignowity Hill Historic District.
- h. LOT COVERAGE Per the Guidelines, the building footprint for new construction should be no more than fifty 50) percent of the size of the total lot area. Generally, staff finds the proposed lot coverage to be appropriate.
- i. MATERIALS The applicant has proposed materials that include Hardie siding, single hung wood windows, a standing seam metal or asphalt shingle roof, Azek column wrap and stone veneer column bases. Staff finds the use of Hardie siding to be appropriate; however, the siding should feature a smooth finish and an exposure of four (4) inches. Staff finds the installation of a standing seam metal roof or an asphalt shingle roof to be appropriate. The standing seam metal roof should feature panels that are 18 to 21 inches wide, seams that are 1 to 2 inches tall, a crimped ridge seam and a standard galvalume finish. If a low profile ridge cap is requested, it must be reviewed and approved by staff prior to installation. An inspection of roofing materials is to be scheduled by the applicant prior to the installation of roofing materials. Staff finds that the proposed columns should feature wood or Hardie trim and not feature stone veneer bases, a material that is not commonly found on historic structure in the district.
- j. WINDOW MATERIALS As noted in finding i, the applicant has proposed single hung, wood windows. Windows must feature meeting rails that are no taller than 1.25" and stiles no wider than 2.25". White manufacturer's color is not allowed, and color selection must be presented to staff. There should be a minimum of two inches in depth between the front face of the window trim and the front face of the top window sash. This must be accomplished by recessing the window sufficiently within the opening or with the installation of additional window trim to add thickness. Window trim must feature traditional dimensions and an architecturally appropriate sill detail. Window track components must be painted to match the window trim or concealed by a wood window screen set within the opening. Grouped windows should be separated by a wood mullion to feature approximately six (6) inches in width. Windows featuring false divided lites are not appropriate.
- k. ARCHITECTURAL DETAILS The applicant has proposed new construction that features architectural details that are generally appropriate for the Dignowity Hill Historic District. The proposed new construction features many elements that are complementary to the Craftsman style. As noted in previous findings, staff finds that column materials should feature wood or Hardie and grouped windows should be separated by mullions.
- 1. DRIVEWAY The applicant has proposed a driveway to be located on the north side of the property. The applicant has proposed for the driveway to feature ten (10) feet in width. This is consistent with the Guidelines.
- m. WALKWAY The applicant has proposed a concrete paver walkway to lead from the front porch to the street. The applicant has proposed to retain an existing, concrete walkway; however, the walkway no longer exists in its integrity. The design of the proposed new construction would result in an offset concrete paver walkway connecting to the existing walkway. While staff finds this to be inconsistent with the Guidelines, given this instance, staff finds the proposed offset pavers to the appropriate.

n. FENCING – The applicant has proposed to replace the existing walkway and driveway gates, but retain the existing fence. Staff finds that the driveway gate should be located at the front façade of the house or toward the rear rather than at the fence line.

RECOMMENDATION:

Staff recommends final approval based on findings a through n with the following stipulations:

- i. That the applicant increase the proposed setback to where it will be greater than that of both neighboring historic structures. This should be demonstrated to staff prior to receiving a Certificate of Appropriateness.
- ii. That the proposed Hardie siding feature a smooth finish and an exposure of four (4) inches.
- iii. That the proposed standing seam metal roof feature panels that are 18 to 21 inches wide, seams that are 1 to 2 inches tall, a crimped ridge seam and a standard galvalume finish. If a low profile ridge cap is requested, it must be reviewed and approved by staff prior to installation. An inspection of roofing materials is to be scheduled by the applicant prior to the installation of roofing materials.
- iv. That the proposed columns feature wood or Hardie trim and that the proposed faux stone bases be eliminated and replaced by wood.
- v. That the proposed grouped widows are separated by wood mullions featuring approximately six (6) inches in width.
- vi. That the proposed driveway gate be located at or behind the front façade of the house.
- vii. Windows must feature meeting rails that are no taller than 1.25" and stiles no wider than 2.25". White manufacturer's color is not allowed, and color selection must be presented to staff. There should be a minimum of two inches in depth between the front face of the window trim and the front face of the top window sash. This must be accomplished by recessing the window sufficiently within the opening or with the installation of additional window trim to add thickness. Window trim must feature traditional dimensions and an architecturally appropriate sill detail. Window track components must be painted to match the window trim or concealed by a wood window screen set within the opening. Grouped windows should be separated by a wood mullion to feature approximately six (6) inches in width. Windows featuring false divided lites are not appropriate.

CASE MANAGER:

Edward Hall





Flex Viewer

Powered by ArcGIS Server

Printed:Jul 11, 2018

The City of San Antonio does not guarantee the accuracy, adequacy, completeness or usefulness of any information. The City does not warrant the completeness, timeliness, or positional, thematic, and attribute accuracy of the GIS data. The GIS data, cartographic products, and associated applications are not legal representations of the depicted data. Information shown on these maps is derived from public records that are constantly undergoing revision. Under no circumstances should GIS-derived products be used for final design purposes. The City provides this information on an "as is" basis without warranty of any kind, express or implied, including but not limited to warranties of merchantability or fitness for a particular purpose, and assumes no responsibility for anyone's use of the information.



622 Muncey Description of the Project

JCG Homes, LLC

ATTN: Office of Historic Preservation 1901 S. Alamo San Antonio, TX 78204

We Are going to build a 3 bed 2 bath single family 1,375sf house on an empty lot. The home will be a one-story home, built slab on grad with 10ft ceilings throughout the house with a 12' lofted ceiling in the living room. We are going to use fiber cement (hardie board) siding on the exterior of the home.

We want to provide a single-family home built with quality material but is affordable to people looking for their first home in a growing area of San Antonio.

Thanks,

Cy Goudge JCG Homes, LLC

622 Muncey Material List

JCG Homes, LLC

ATTN: Office of Historic Preservation 1901 S. Alamo San Antonio, TX 78204

- Siding Hardie Plank Siding (Primed Cedarmill Fiber Cement Lap Siding)
- Windows:
 - o 6' x 5' 3 Single hung wood windows
 - o 5' x 5' 2 Single hung wood windows
 - 4' x 5' 2 Single hung wood windows
 - 2' 6" x 3' Single hung wood window
 - 3' x 2' Fixed wood window (frosted glass)
 - 2' 6" x 2' Fixed wood window (frosted glass)
- Doors:
 - o 3' x 8' Exterior door (tempered glass)
 - o 6' x 8' Exterior French double door (tempered glass)
- Roofing Stranding Seam Metal Roof
- Column Azek Column Wrap
- Column Base Stone veneer wrap (match exiting fence columns)

Thanks,

Cy Goudge JCG Homes, LLC

622 Muncey Photos

JCG Homes, LLC

ATTN: Office of Historic Preservation 1901 S. Alamo San Antonio, TX 78204






Thanks,

Cy Goudge JCG Homes, LLC

GENERAL NOTES:

- THIS BUILDERS SET(PART OF THE CONTRACT DOCUMENTS) IS 1. PRESENTED TO INCLUDE DRAWINGS ON 24X36 SHEETS.
- 2. ELECTRICAL AND PLUMBING LINES SHALL RUN CONCEALED AND FRAMING SHALL BE OF ADEQUATE DIMENSIONS TO ACCOMPLISH THIS RESULT WITHOUT CHANGES IN THE WALL PLANE OR CEILING PLANE.
- 3. WHEN REFERENCE IS MADE TO A MATERIAL SYSTEM, ALL PARTS AND MATERIALS PERTINENT TO THE MANUFACTURER'S SYSTEM SHALL BE FURNISHED AND INSTALLED ACCORDING TO THE MANUFACTURER'S INSTRUCTIONS AND SPECIFICATIONS,
- 4. ALL INFORMATION ON EXISTING CONDITIONS WAS SUPPLIED TO THE DESIGNER BY THE OWNER, CONTRACTOR IS REQUESTED TO VERIFY, ON-SITE, ALL DIMENSIONS & CONDITIONS BEFORE STARTING CONSTRUCTION. REPORT ANY DISCREPANCIES IMMEDIATELY TO THE DESIGNER PRIOR TO THE COMMENCING OF CONSTRUCTION.
- 5. FINISHES AND TEXTURES SELECTED BY OWNER.
- 6. REPAIR ANY DAMAGED AREAS PRIOR TO APPLYING FINISHES
- 7. THE CONTRACT DOCUMENTS ARE COMPLIMENTARY, AND WHAT IS REQUIRED BY ONE SHALL BE AS BINDING AS IF REQUIRED BY ALL, ALL CONTRACT DOCUMENTS AND ENGINEERING DRAWINGS ARE TO BE USED TOGETHER. GENERAL CONTRACTOR AND SUBCONTRACTORS ARE RESPONSIBLE TO REVIEW COMPLETE SETS OF DOCUMENTS AND REPORT ANY DISCREPENCIES TO THE DESIGNER PRIOR TO THE START OF CONSTRUCTION.
- 8. CONTRACTOR SHALL MAINTAIN A NEAT PREMISE AND SHALL THOUROUGHLY CLEAN ALL FINISHED SURFACES INSIDE AND OUTSIDE OF THE PROJECT.
- 9. ALL SUBCONTRACTORS ARE RESPONSIBLE FOR A COMPLETE JOB WITHIN THEIR DISCIPLINES AND SHALL NOTIFY THE CONTRACTOR AND THE OWNER OR HIS AUTHORIZED AGENT OF ANY NORMALLY REQUIRED ITEMS NOT SPECIFICALLY IDENTIFIED IN THE DRAWINGS.
- 10. NUMERICAL DIMENSIONS SHALL TAKE PRIORITY OVER SCALED DIMENSIONS.
- 11. ALL WORK AND MATERIALS ARE TO COMPLY IN EVERY RESPECT WITH THE LATEST REQUIREMENTS OF ALL APPLICABLE CITY, COUNTY AND STATE CODES, LOCAL REGULATIONS AND THE DIRECTION OF THE BUILDING INSPECTOR FOR SUCH BUILDING LAWS, REGULATION AND DIRECTIONS ARE TO BE CONSIDERED AS PART OF THESE PLANS.
- 12. FOR ANY ITEM IDENTIFIED IN THE CONTRACT DOCUMENTS THAT IS REASONABLY INFERABLE AS A COMPONENT IN A SYSTEM AND REQUIRED FOR THE PERFORMANCE OF THAT SYSTEM, THE GENERAL CONTRACTOR SHALL INCLUDE ALL OTHER COMPONENTS IN THE WORK WHICH ARE NECCESARY FOR THE COMPLETION AND FULL OPERATIONAL PERFORMANCE OF THAT SYSTEM.

- 13. THE CONTRACT DOCUMENTS INDICATE THE GENERAL DESIGN INTENT, BUT DO NOT NECESSARILY DESCRIBE ALL WORK REQUIRED FOR FULL PERFORMANCE AND COMPLETION. THE CONTRACTOR SHALL PROVIDE ALL ITEMS REQUIRED FOR THE PROPER EXECUTION AND COMPLETION OF THE WORK.
- 14. THE GENERAL CONTRACTOR SHALL VERIFY IN THE FIELD AND COORDINATE BETWEEN THE TRADES, ALL CONDITIONS BOTH NEW AND EXISTING WHICH AFFECT WORK TO BE DONE OR RELEVANT THERETO, INCLUDING BUT NOT LIMITED TO, PROPERTY LINE DIMENSIONS, SETBACKS, EASEMENTS ,RESTRICTIONS, EXACT LOCATIONS OF ALL CONSTRUCTION, EXISTING AND NEW, EXISTENCE AND LOCATIONS OF ASBESTOS OR OTHER UNKNOWN TOXIC MATERIALS, DRIVEWAYS, WALKS, APRONS, UTILITIES, GRADES, AND DRAINAGE. THE CONTRACTOR IS RESPONSIBLE FOR THE DISCOVERY OF ASBESTOS AND OTHER REGULATED TOXIC MATERIALS AND SHALL BEAR ADMINISTRATIVE RESPONSIBILITY FOR CONFORMANCE TO FEDERAL, STATE, AND LOCAL JURISDICTIONAL REQUIREMENTS REGARDING THE DISPOSITION OF HAZARDOUS MATERIALS. SHOULD ANY QUESTIONS ARISE OR DISCREPENCIES ON THE DRAWINGS BE NOTED PRIOR TO BEGINNING OF CONSTRUCTION OR DURING ANY PHASE OF CONSTRUCTION, CONTRACTOR SHALL IMMEDIATELY NOTIFY THE DESIGNER FOR REVIEW AND CLARIFICATION BEFORE PROCEEDING WITH THAT PORTION OF THE WORK OR ANY PART RELATED TO THERETO.
- 15. CONTRACTOR SHALL OBTAIN AND BE RESPONSIBLE FOR ALL FEES AND PERMITS REQUIRED AND ASSOCIATED WITH ALL PHASES OF THE WORK AND WITHIN SCOPE OF THE CONTRACT DOCUMENTS INCLUDING BUT NOT LIMITED TO: BUILDING PERMIT FEES, MEP FEES, WATER FEES, SEWER FEES, DRIVEWAY FEES, AND SIDEWALK FEES. THE LOCATION OF UTILITIES SHOWN ON THE SITE PLANS ARE BASED ON INFORMATION AVAILABLE. CONTRACTOR SHALL VERIFY THE EXACT LOCATION OF ALL UTILITIES BEFORE STARTING CONSTRUCTION.
- 16. DESIGN AND CONSTRUCTION PROCESSES TO COMPLY WITH LOCAL, HOA, AND LOCAL AND STATE RESIDENTIAL BUILDING CODE REQUIREMENTS
- 17. ALL WOOD FRAMING TO BE TREATED.
- 18. ALL WOOD BLOCKING TO BE FIRE RETARDANT.
- 19. REFER TO ADDITIONAL NOTES BY STRUCTURAL AND MEP DISCIPLINES. WHERE VARIOUS DISCIPLINES INDICATE WORK FOR DIFFERENT DISCIPLINES (FOR EXAMPLE, MECHANICAL WORK WHICH WOULD REQUIRE STRUCTURAL MODIFICATIONS), THE GENERAL CONTRACTOR IS TO NOTIFY THE DESIGNER PRIOR TO COMMENCING THE WORK.
- 20. CONTRACTOR SHALL REPORT IMMEDIATELY, TO DESIGNER, (IN WRITTING) ANY EXISTING CONDITIONS (EG;ROT, TERMITES, ETC.) THAT MAY AFFECT PERFORMANCE OF THE EXISTING AND NEW STRUCTURES.

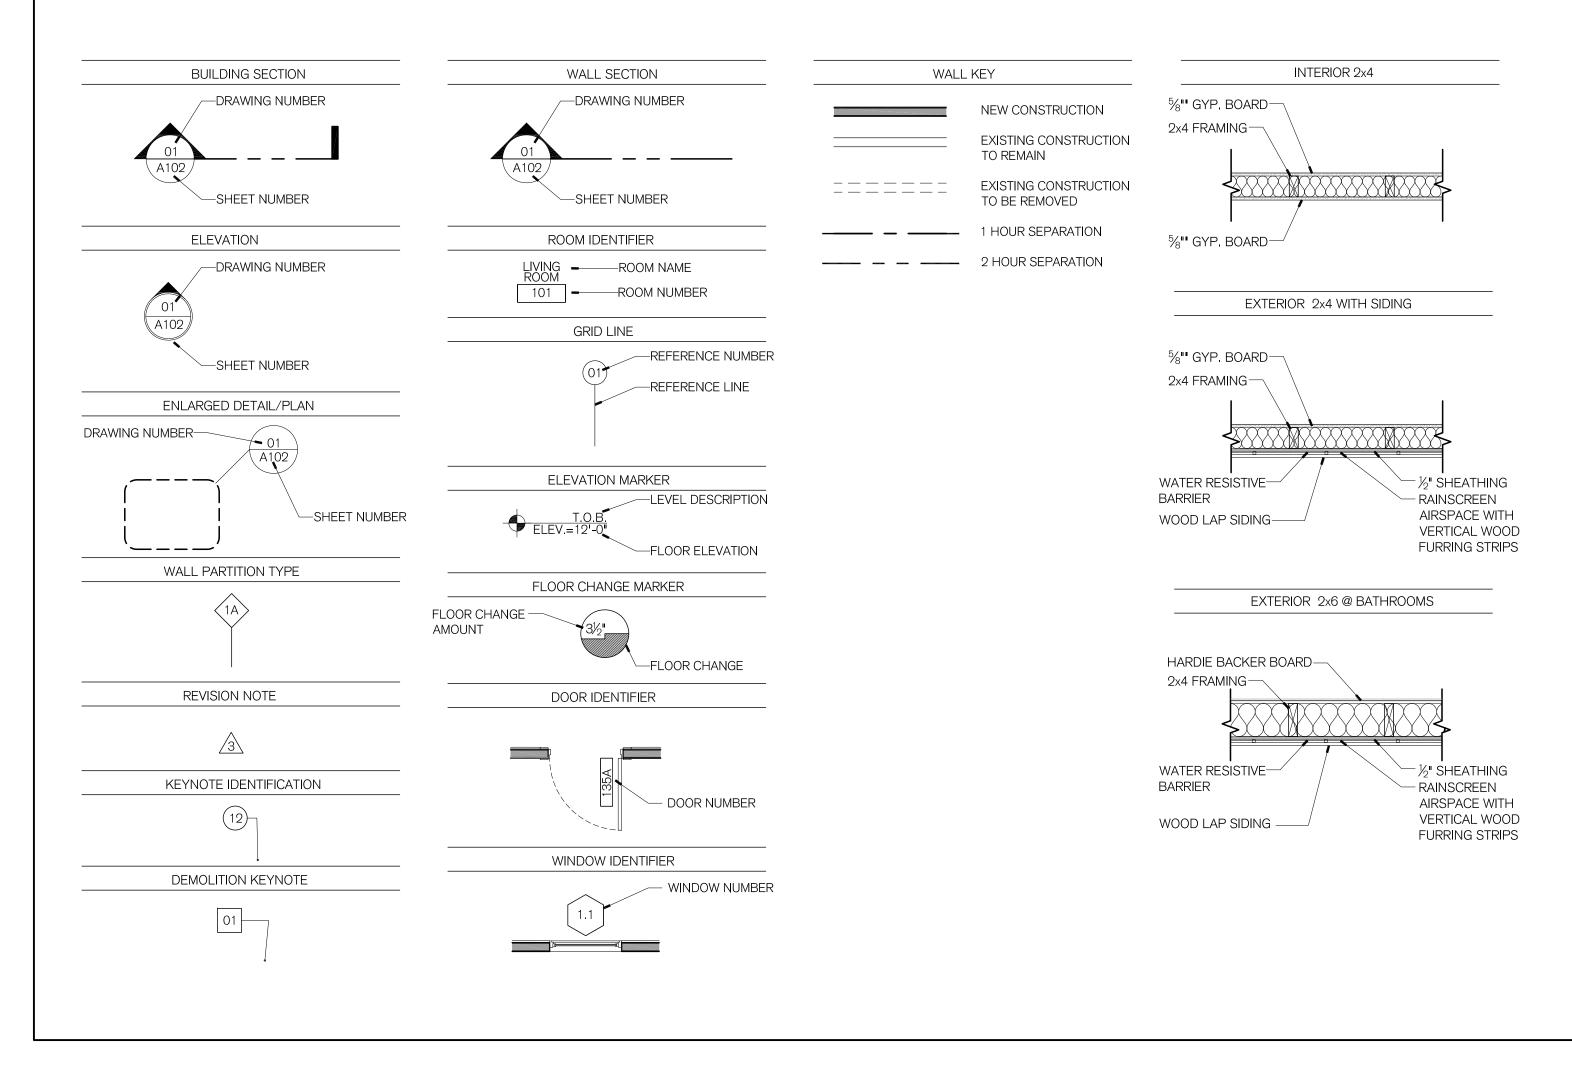

GRAPHIC LEGEND

21, ALL WALLBOARD SHALL BE $\frac{5}{8}$ " THICK AND BE TAPED, FLOATED ,TEXTURED AND FINISHED ACCORDING TO FINISH SCHEDULES. USE TYPE "X" WALL BOARD ON GARAGE WALLS AND CEILINGS. USE HARDI-BACKER BOARD ON ALL PLUMBING WALLS TO BE TILED.

22. CONTRACTOR SHALL BE HELD RESPONSIBLE FOR THE EXECUTION OF THE PROJECT IN A COMPLETE AND WORKMAN LIKE MANNER, CONFORMING TO THE BEST STANDARDS OF PRACTICE IN VARIOUS TRADES.

23. NO VEHICLE IS PERMITTED ON THE ADJACENT PROPERTY AND ANY DAMAGE DONE TO EXISTING DRIVES AND WALKS OR OTHER STRUCTURES WILL BE REPAIRED OR REPLACED AND CHARGED TO THE PERSON OR COMPANY RESPONSIBLE.

24. TRADE NAMES AND BRANDS NOTED ON THE CONTRACT DOCUMENTS ARE FOR QUALITY STANDARDS ONLY. SUBSTITUTIONS OF "EQUAL" PRODUCTS MAY BE MADE WITH THE OWNER'S PERMISSION, I.C.B.O./N.E.R. SUBSTITIONS SHALL BE MADE ONLY WITH PRODUCTS WHICH HAVE CURRENTLY ACTIVE I.C.B.O/N.E.R. EVALUATION REPORTS, OR BE APPROVED AND LISTED BY OTHER NATIONALLY RECOGNIZED TEST AGENCIES.

APPLICABLE CODES:

2015 INTERNATIONAL BUILDING CODE 2015 INTERNATIONAL RESIDENTIAL CODE 2015 INTERNATIONAL MECHANICAL CODE 2015 INTERNATIONAL PLUMBING CODE 2015 INTERNATIONAL FUEL GAS CODE 2015 INTERNATIONAL FIRE CODE 2015 INTERNATIONAL CONSERVATION CODE 2014 NATIONAL ELECTRIC CODE

PROJECT INFORMATION:

LOCATION: 622 MUNCEY STREET, SAN ANTONIO TX,78202 OCCUPANCY CLASSIFICATION: SINGLE FAMILY RESIDENTIAL

SQUARE FOOTAGE:

CONDITIONED:		
	FIRST FLOOR	1375 SQ.FT.
	TOTAL	1375 SQ. FT.
UNCONDITIONED:	FRONT /REAR PORCH	100 SO ET
	DRIVEWAY	
	TOTAL:	780 SQ. FT.
[GRAND TOTAL	2,155 SQ. FT.

SHEET INDEX:

ARCHITECTURE:

4-100	COVER SHEET
4-101	SITE PLAN
4-102	FLOOR PLAN
4-103	RCP/ELECTRICAL PLAN
4-104	ROOF PLAN
4-200	EXTERIOR ELEVATIONS
4-201	EXTERIOR ELEVATIONS
4-300	BUILDING SECTIONS
4-301	WALL SECTIONS
4-500	INTERIOR ELEVATIONS
4-700	DOOR & WINDOW SCHEDUL



MUNCEY STREET RESIDENCE

622 MUNCEY STREET SAN ANTONIO TX, 78202

DESIGN TEAM:

BARRAZA DESIGNS, LLC 3830 SALTY MARSH SAN ANTONIO, TEXAS, 78245 210-209-6127

TYP. WALL TYPES:

LOCATION MAP:

Avenue 898	E Grayson St W Carson	E Carson	E Grayson Will Quitman S St E Ca	t	S-34 Rd op Easley St & S-35 Rd & Infantry Post Rd	vsh St zy St Frank St	Walters St
	Austin St		Ita St Mason St	Colita St	Sandmeyer St Carling Strengthere		Edgar St
35		+	Interstate 35 From	tage Rd	+ 35		-
STZ.	-		35				
Ð	+ 368 <i>ts</i> utra Duval St	N Pine St Brooks St N Hackberry	Sharer St	Sharer St	z	Seguin St	
mar	Milam N Mesquite St	Z Q S Sherma Surleson N Hackberry	Mu	2 Muncey Street Rudolph St St Charles Charles Logan St	New Braunfels Ave Gabriel Lamar St	n Burleson Hudson St	Gabriel
		erry	ncey St Willow St		SIDE PROMIS	-	
		Hays St	SI			E	
rnet St		DIGNOWTY Burnet St	HILL		GHBORHOOD Blaine Burnet St	Orphan St 王	Burnet St Poinsettia
НҮ		Nolan St		St Charle	ockhan Martin	Blue Bonnet St	romolettia
		Dawson St E Houston St	Gorman	rt es	Daw son St Gulf	s St	Gorman S Gulf E Housto
	z z	z			e z z		
ckett St	N Mesq N Cherr	E Crockett St		E Crockett St	Ave a canton of a	E Crockett St	Canton



DATE 15 JUNE 2018 BARRAZA DESIGN 3830 SALTY MARSH, SAN ANTONIO, TEXAS 78215 VOICE: (210) 209-6127

THIS PLAN AND THE DESIGNS CONTAINED HEREIN ARE THE PROPERT ARRAZA DESIGNS, LLC AND HECTOR BARRAZA AND MAY NOT BE REPROD

ALL OR IN PART, WITHOUT WRITTEN CONSENT FROM HECTOR BAR

BARRAZA DESIGN, LLC IS A DESIGN FIRM, NOT AN ENGINEERING FIRM. WE NOT QUALIFY TO BE ONE NOR ARE WE LICENSED TO DESIGN STRUCTL FRAMING, WIND BRACING OR FOUNDATIONS. A LICENSED PROFESSIO

ENGINEER SHOULD BE CONTRACTED AND CONSULTED IMMEDIAT REGARDING FRAMING, WIND BRACING AND THE FOUNDATION DESIGNS. SHO

AN ENGINEER'S SEAL BE PRESENT ON THESE DRAWINGS, THE "ENGINEER OR RECORD" SHALL BEAR ALL RESPONSIBILITY FOR THE STRUCTURE, WIN

BRACING AND FOUNDATION DESIGNS FOR THIS PROJECT. BARRAZA DESIGN,

HECTOR BARRAZA ARE NOT TO BE HELD RESPONSIBLE FOR THE STRUCTUR DESIGN IN ANY WAY MATTER OR FORM IF ANY ISSUES OR PROBLEMS AF

Residence

622 Muncey San Antonio, TX, 78202

OWNER

PROJECT

Cy Goudge 305 Castano Ave

San Antonio, Texas, 78209

ROJECT NUMBER

102 622 Muncey

CONSTRUCT. DOCS

NO.	DATE	DESCRIPTION OF ISSUE
1	05/20/2018	Schematic Design
2	06/15/2018	HDRC Builders Set

ONSULTAN'


SHEET TITLE

COVER SHEET

DATE 15 JUNE 2018

SHEETNUMBER



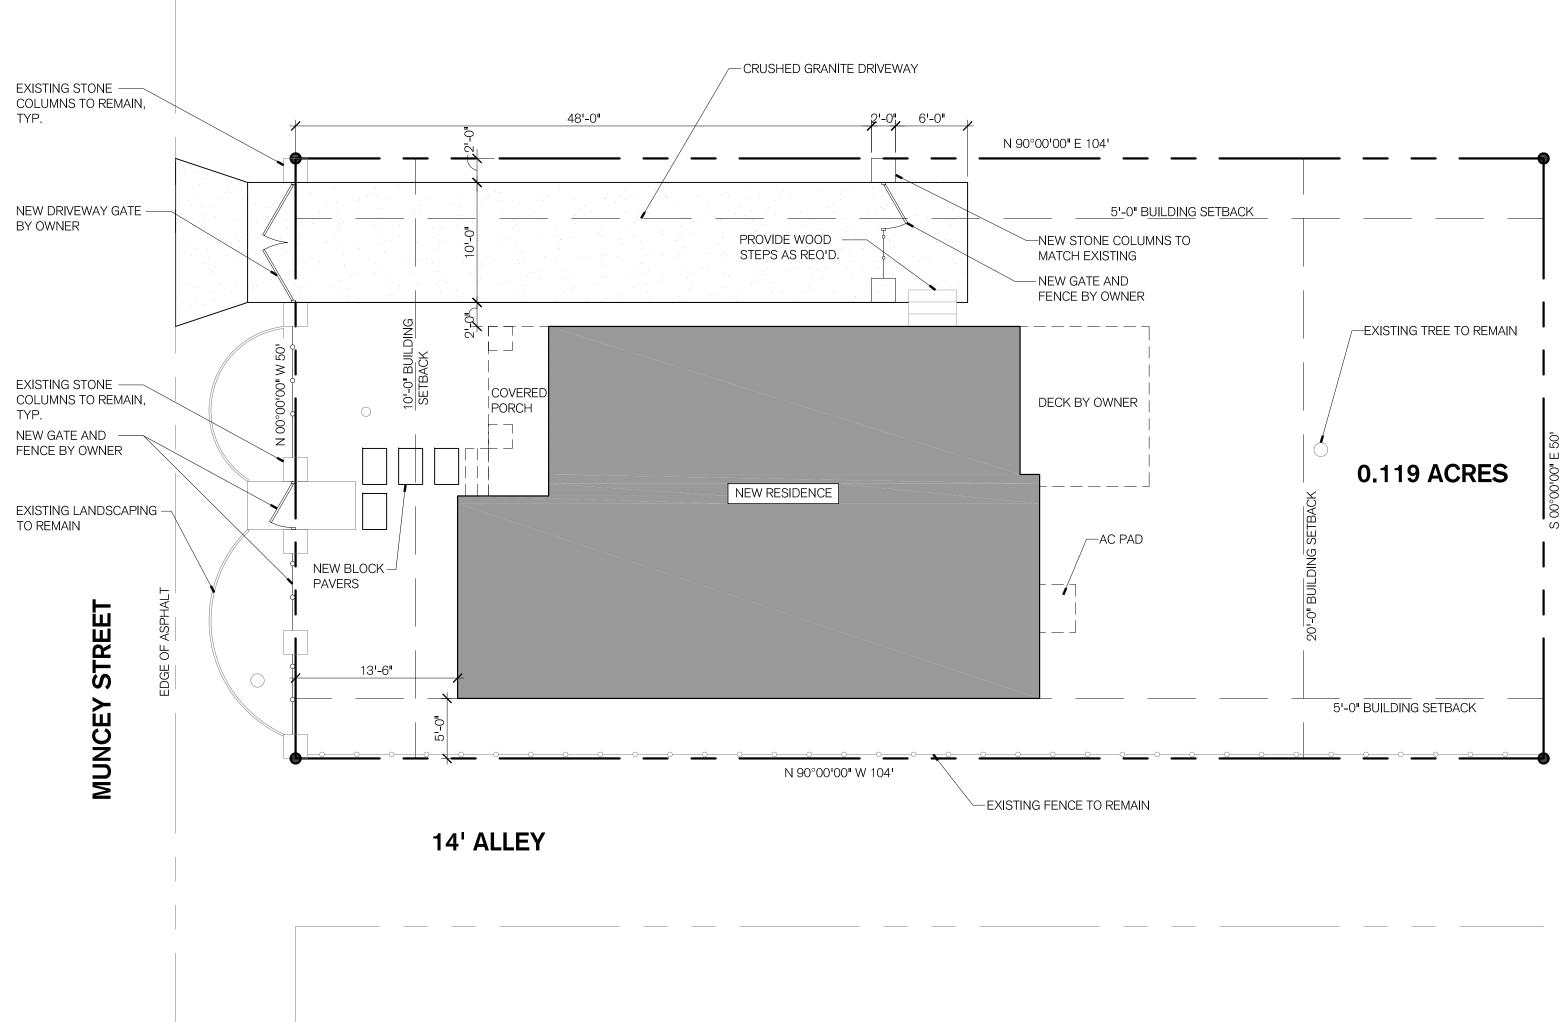



- FOR CONCRETE DRIVEWAY AND SIDEWALK.
- GUIDELINES
- EXISTING COLUMN MATERIAL.



SITE NOTES:

1. NEW CONCRETE SIDEWALK TO CITY OF SAN ANTONIIO SPECIFICATIONS 2. PROVIDE CONTROL JOINTS AND EXPANSION JOINTS AS REQUIRED

3. OBSERVE ALL CITY CODES & REGULATIONS FOR SETBACKS.

4. SEE SHEET A-104 FOR ROOF PLAN 5. SLOPE FINISHED GRADE AWAY FROM HOUSE FOR POSITIVE DRAINAGE. SWALE AS REQUIRED TO MEET NEIGHBORHOOD

6. VERIFY EXISTING LOCATIONS OF WATER SPICKETS. CAP AND ABANDON ANY SPICKETS IN CONFLICT WITH FOUNDATION, SIDEWALKS, & DRIVEWAYS.

7. VERIFY EXISTING LOCATION OF TREES TO BE PRESERVED. 8. EXISTING STONE COLUMNS TO REMAIN. NEW COLUMNS TO MATCH

9. OWNER TO PROVIDE NEW FENCING AND GATES THAT ADHERE TO HOA AND DIGNOWITY HISTORIC DISTRICT REQUIREMENTS.

LEGAL DESCRIPTION:

ADRESS: 622 MUNCEY STREET LOT: SOUTH 50' OF LOTS 1& 2 BLOCK:3 NCB:1302 SUBDIVISION: DIGNOWITY HILL, SAN ANTONIO , TEXAS, 78202

LEGEND:

NEW RESIDENCE

CRUSHED GRANITE DRIVEWAY

— — — — SETBACK LINES

EXISTING TREE TO REMAIN



DATE 15 JUNE 2018 BARRAZA DESIGN 3830 SALTY MARSH, SAN ANTONIO, TEXAS 78215 VOICE: (210) 209-6127

THIS PLAN AND THE DESIGNS CONTAINED HEREIN ARE THE PROPERTY OF BARRAZA DESIGNS, LLC AND HECTOR BARRAZA AND MAY NOT BE REPRODUCED, ALL OR IN PART, WITHOUT WRITTEN CONSENT FROM HECTOR BARRAZA BARRAZA DESIGN, LLC IS A DESIGN FIRM, NOT AN ENGINEERING FIRM. WE DO NOT QUALIFY TO BE ONE NOR ARE WE LICENSED TO DESIGN STRUCTURAL FRAMING, WIND BRACING OR FOUNDATIONS. A LICENSED PROFESSIONAL ENGINEER SHOULD BE CONTRACTED AND CONSULTED IMMEDIATELY REGARDING FRAMING, WIND BRACING AND THES DRAWINGS, THE "ENGINEER OF RECORD" SHALL BEAR ALL RESPONSIBILITY FOR THE STRUCTURE, WIND BRACING AND FOUNDATION DESIGNS FOR THIS PROJECT. BARRAZA DESIGN, & HECTOR BARRAZA ARE NOT TO BE HELD RESPONSIBLE FOR THE STRUCTURAL DESIGN IN ANY WAY MATTER OR FORM IF ANY ISSUES OR PROBLEMS ARISE.

Residence

622 Muncey San Antonio, TX, 78202

OWNER

PROJECT

Cy Goudge 305 Castano Ave.

San Antonio, Texas, 78209

PROJECT NUMBER

102 622 Muncey

CONSTRUCT. DOCS.

NO.	DATE	DESCRIPTION OF ISSUE
1	05/20/2018	Schematic Design
2	06/15/2018	HDRC Builders Set

ONSULTANT

SHEET TITLE SITE PLAN

DATE

15 JUNE 2018

SHEET NUMBER



PLAN NOTES:

- 1. DIMENSIONS ARE FROM FACE OF STUDS, EDGE OF CONCRETE ,COLUMN CENTERLINES, WINDOW AND DOOR CENTERLINES UNLESS NOTED OTHERWISE (U.N.O.).
- 2. ALL DOORS ARE TO BE 6" FROM FACE OF ADJACENT PERPENDICULAR STUD WALL TO EDGE OF DOOR (U.N.O).
- 3. FIRST FLOOR: 10'-0" PLATE HEIGHT (U.N.O.)
- 4. FIRST FLOOR: 8'-0" WINDOW HEADER HEIGHT (U.N.O.)
- 5. ALL EXTERIOR WALLS TO BE 4" STUD WALLS (U.N.O.)
- 6. CONTRACTOR TO VERIFY ALL EXISTING CONDITIONS AND PLAN DIMENSIONS PRIOR TO BEGINNING ANY CONSTRUCTION OR FABRICATION AND NOTIFY DESIGNER IN WRITING OF ANY DISCREPANCIES.
- CONTRACTOR TO PROVIDE TREATED WOOD BLOCKING AS NECESSARY FOR 7. ANY WALL MOUNTED ITEM OR ACCESSORIES.
- CONTRACTOR SHALL VERIFY ALL DIMENSIONS TO ENSURE PROPER FIT PRIOR 8. TO MANUFACTURING MILLWORK OR ORDERING ANY SPECIALTY ITEMS OR EQUIPMENT.
- 9. REFER TO TEXAS ACCESSIBILITY STANDARDS (T.A.S.) FOR ALL MOUNTING HEIGHTS, DOOR CLEARANCES, ETC. PROVIDE FIRE RATED EXTINGUISHER CABINET WHEN LOCATED IN RATED PARTITION.
- 10. ALL INTERIOR WALLS TO BE 4^I STUD WALLS (U.N.O)
- 11. ESCAPE/RESCUE WINDOWS FROM SLEEPING AREAS SHALL HAVE A MINIMUM 5.7 SQUARE FOOT CLEAR NET OPENING AND MINIMUM CLEAR OPENING WIDTH OF 20". FINISHED SILL HEIGHT SHALL BE A MAXIMUM OF 44" ABOVE FINISH FLOOR.
- 12. ELECTRICAL CONTRACTOR TO LOCATE 110V GFI OUTLET WITHIN 25'-0" OF A/C COMPRESSOR
- 13. INSTALL LIGHT SWITCHES AND ELECTRICAL CONTROLS NO HIGHER THAN 48" AND ELECTRICAL OUTLETS NO LOWER THAN 15" ABOVE FINISH FLOOR.
- 14. PROVIDE FOR CROSS VENTILATION AT ENCLOSED ATTICS.
- 15. PROVIDE ONE SMOKE DETECTOR IN EACH SLEEPING AREA, CENTRALLY LOCATE ONE IN EACH HALLWAY LEADING TO SLEEPING AREAS-PER IRC 2015. SEE SHEET A-103 FOR RCP/ELECTRICAL PLAN.
- 16. SMOKE ALARMS SHALL BE WIRED IN SERIES WITH BATTERY BACKUP POWER AS PER I.R.C. SEC R317
- 17. INSTALL LEVER HANDLES ON ALL DOORS AND PLUMBING FIXTURES.
- 18. PROVIDE TEMPERED GLASS ON ALL GLASS LOCATED WITHIN 24" OF DOOR OPENINGS-TYP. PER IRC 2015
- 19. ALL NEW WINDOWS TO BE ENERGY EFFICIENT PER LOCAL CITY CODE (IRC 2015)
- 20. ALL SHELVING MATRIAL AND DESIGN TO BE SELECTED BY OWNER
- 21. PROVIDE BLOCKING FOR CEILING FANS AT ALL BEDROOMS, LIVING ROOM, AND COVERED PORCH.
- 22. VENT ALL GAS OUT.

21. WASHER

EXISTING)

26. MICROWAVE

27. AC PAD

23. 2x6 PLUMBING WALL

24. 16" DEEP SHELVING


- 23. EACH ELECTRIC PANEL, LIGHT SWITCH AND THERMOSTAT SHALL BE MOUNTED NO HIGHER THAN 48" ABOVE FINISH FLOOR (A.F.F.) EACH ELECTRIC OUTLET OR OTHER RECEPTACLE SHALL BE AT LEAST 15" (A.F.F.)
- 24. EXTERIOR ELECTRICAL PANEL MUST BE MOUNTED BETWEEN 18" AND 42" ABOVE FINISHED GRADE AND SERVICED BY AN ACCESSIBLE ROUTE.
- 25. PROVIDE ALL REQUIRED CONNECTIONS FOR A/C UNIT TO BE LOCATED IN ATTIC. PROVIDE LARGE DRIP PANS & ELECTRICAL CONNECTIONS, DRAIN LINES TO EXTERIOR (NOT OVER DOORS) PLYWOOD SUB FLOOR @ UNIT LOCATIONS , 24" WIDE PLYWOOD CATWALKS, ATTIC LIGHTING, ETC. REFER TO HVAC PLANS BY OTHERS FOR ALL INFORMATION.
- 26. ALL DOORS TO BE 8'-0" TALL (U.N.O) SEE DOOR SCHEDULE
- 27. ELECTRICAL TO COMPLY WITH NEC/CITY CODE G.F.I. REQUIRED ON ALL EXTERIOR FRONT/REAR OUTLETS, LAVATORIES, GARAGES, KITCHEN COUNTERTOPS, LAUNDRY AREAS AND PLUGS WITHIN 6 FEET OF SINKS OTHER THAN KITCHENS.
- 28. PROVIDE ALARM SYSTEM THRU-OUT AS PER GENERAL CONTRACTORS SPECIFICATIONS.
- 29. VERIFY LOCATION OF A/C PAD SHOWN ON PLAN.

20. DRYER AND VENT EXHAUST PER CODE.

25. 2'-0"x 4'-0" ATTIC ACCESS W/ATTIC LIGHT


22. 6x6 WOOD COL. W/ STONE(MATCH


KE	EYNOTES:	LEG	END:
1. 2. 3.	ELEC. WATER HEATER DRIP PAN TO DRAIN OUTSIDE 42' HIGH BAR COUNTER		WOOD LAP SIDING ON 2x4 WOOD STUDS
4. 5. 6.	36' HIGH KITCHEN COUNTERW/ CABINETS VENT HOOD ABOVE STOVE TO MEET CODE 42' HIGH BAR		WOOD LAP SIDING ON 2x6 WOOD STUDS
7. 8. 9. 10.	REFRIGERATOR BY OWNER KITCHEN SINK BY OWNER DISPOSAL COUNTER-MOUNTED SWITCH 36" GAS COOKTOP		⁵ ∕8"GYP. BOARD(BOTH S ON 2x4 WOOD STUDS
11.	36" DUCTED VENT HOOD ABOVE COOKTOP TO MEET CODE	2	HOSE BIB
12. 13.	BUILT IN DISHWASHER BY OWNER FLOOR MOUNTED DUAL FLUSH TOILET	\$	GAS CONNECTION
14.	TILED SHOWER,SHOWER ARM, HEAD CONTROLLER,DRAIN (MASTER DRAIN)	\uparrow	WATER CONNECTION
15.	SHOWER SLIDING DOOR, (TEMPERED)		DRAIN
16.	30" VANITY, SINK,FAUCET, DRAIN	IÎI	EXHAUST VENT
17.	60' VANITY W/ (2) SINKS	ili	
18.	MIRROR, BY OWNER		
19.	ALCOVE BATHTUB, TILED, SHOWER HEAD, DRAIN.		

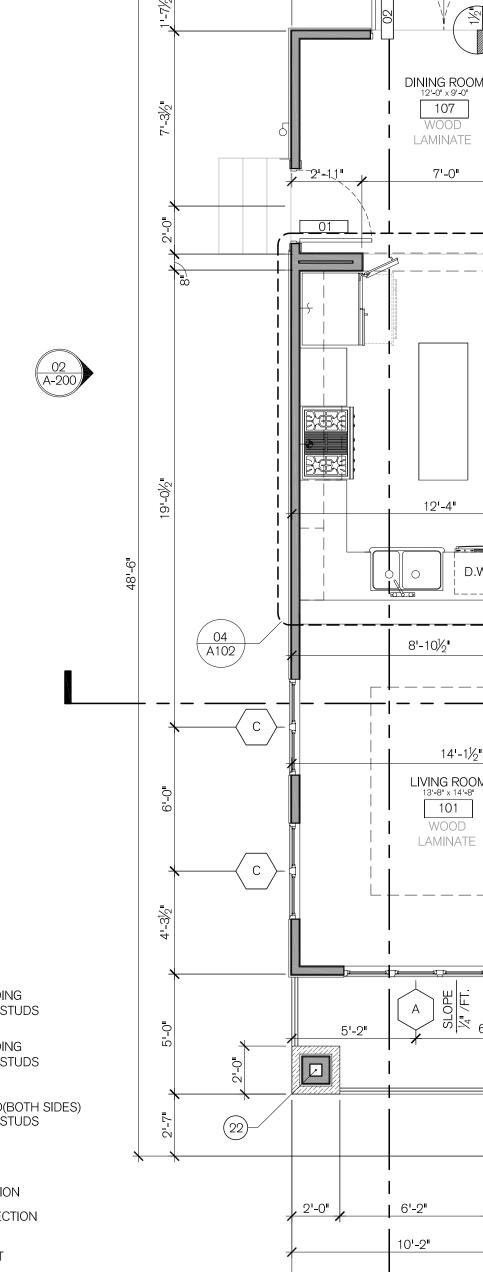





6'-4"

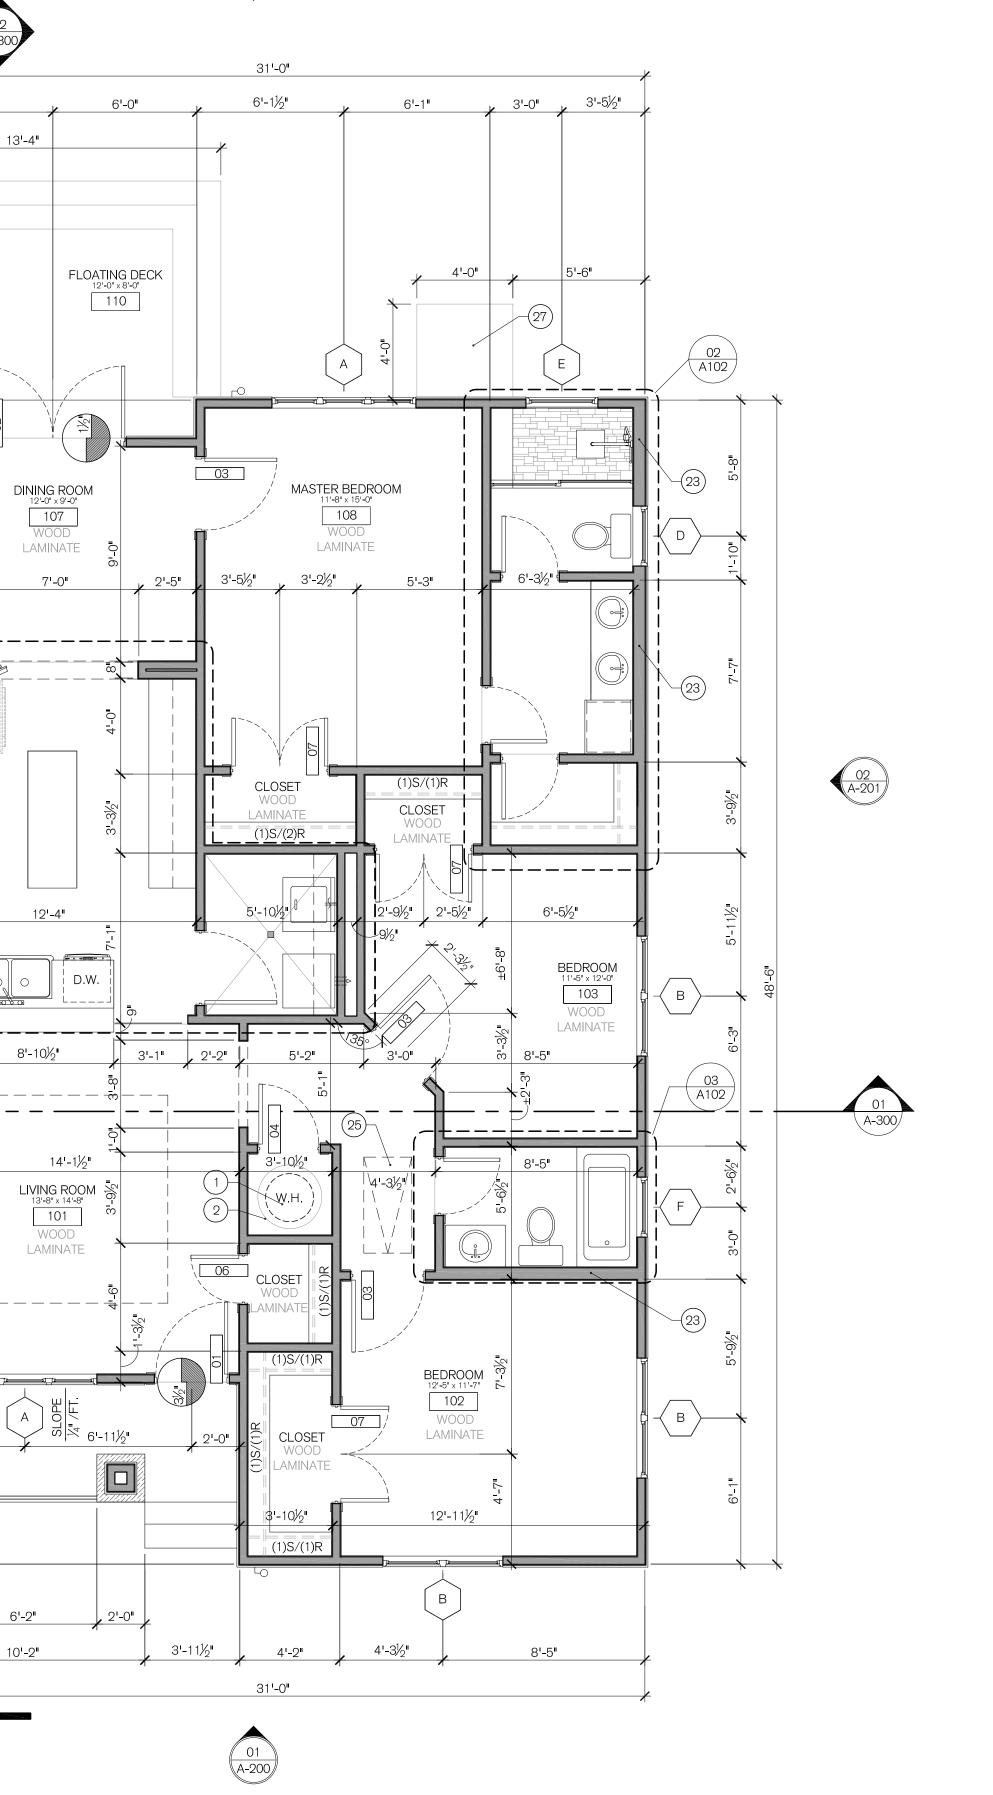

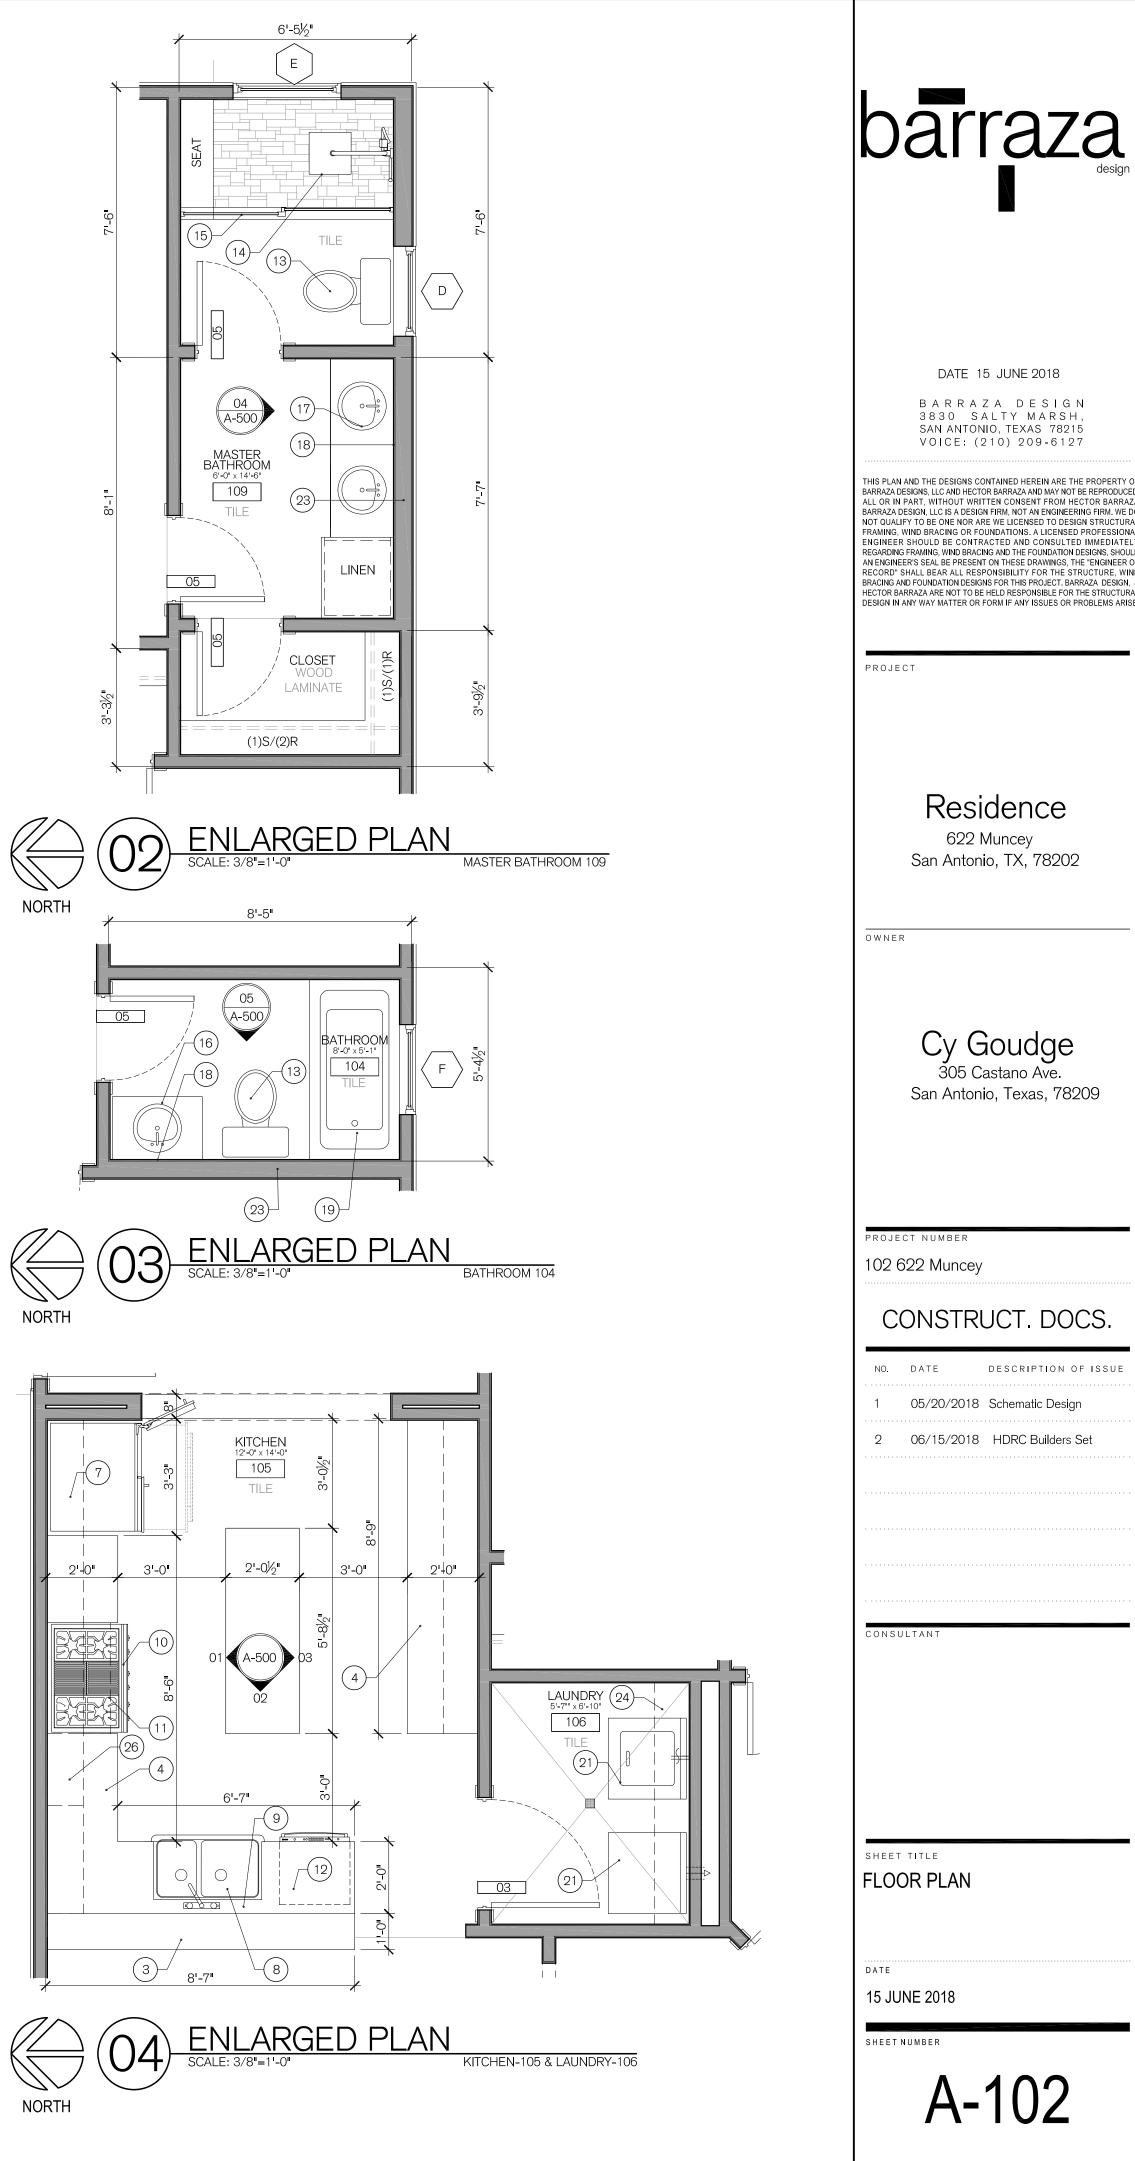

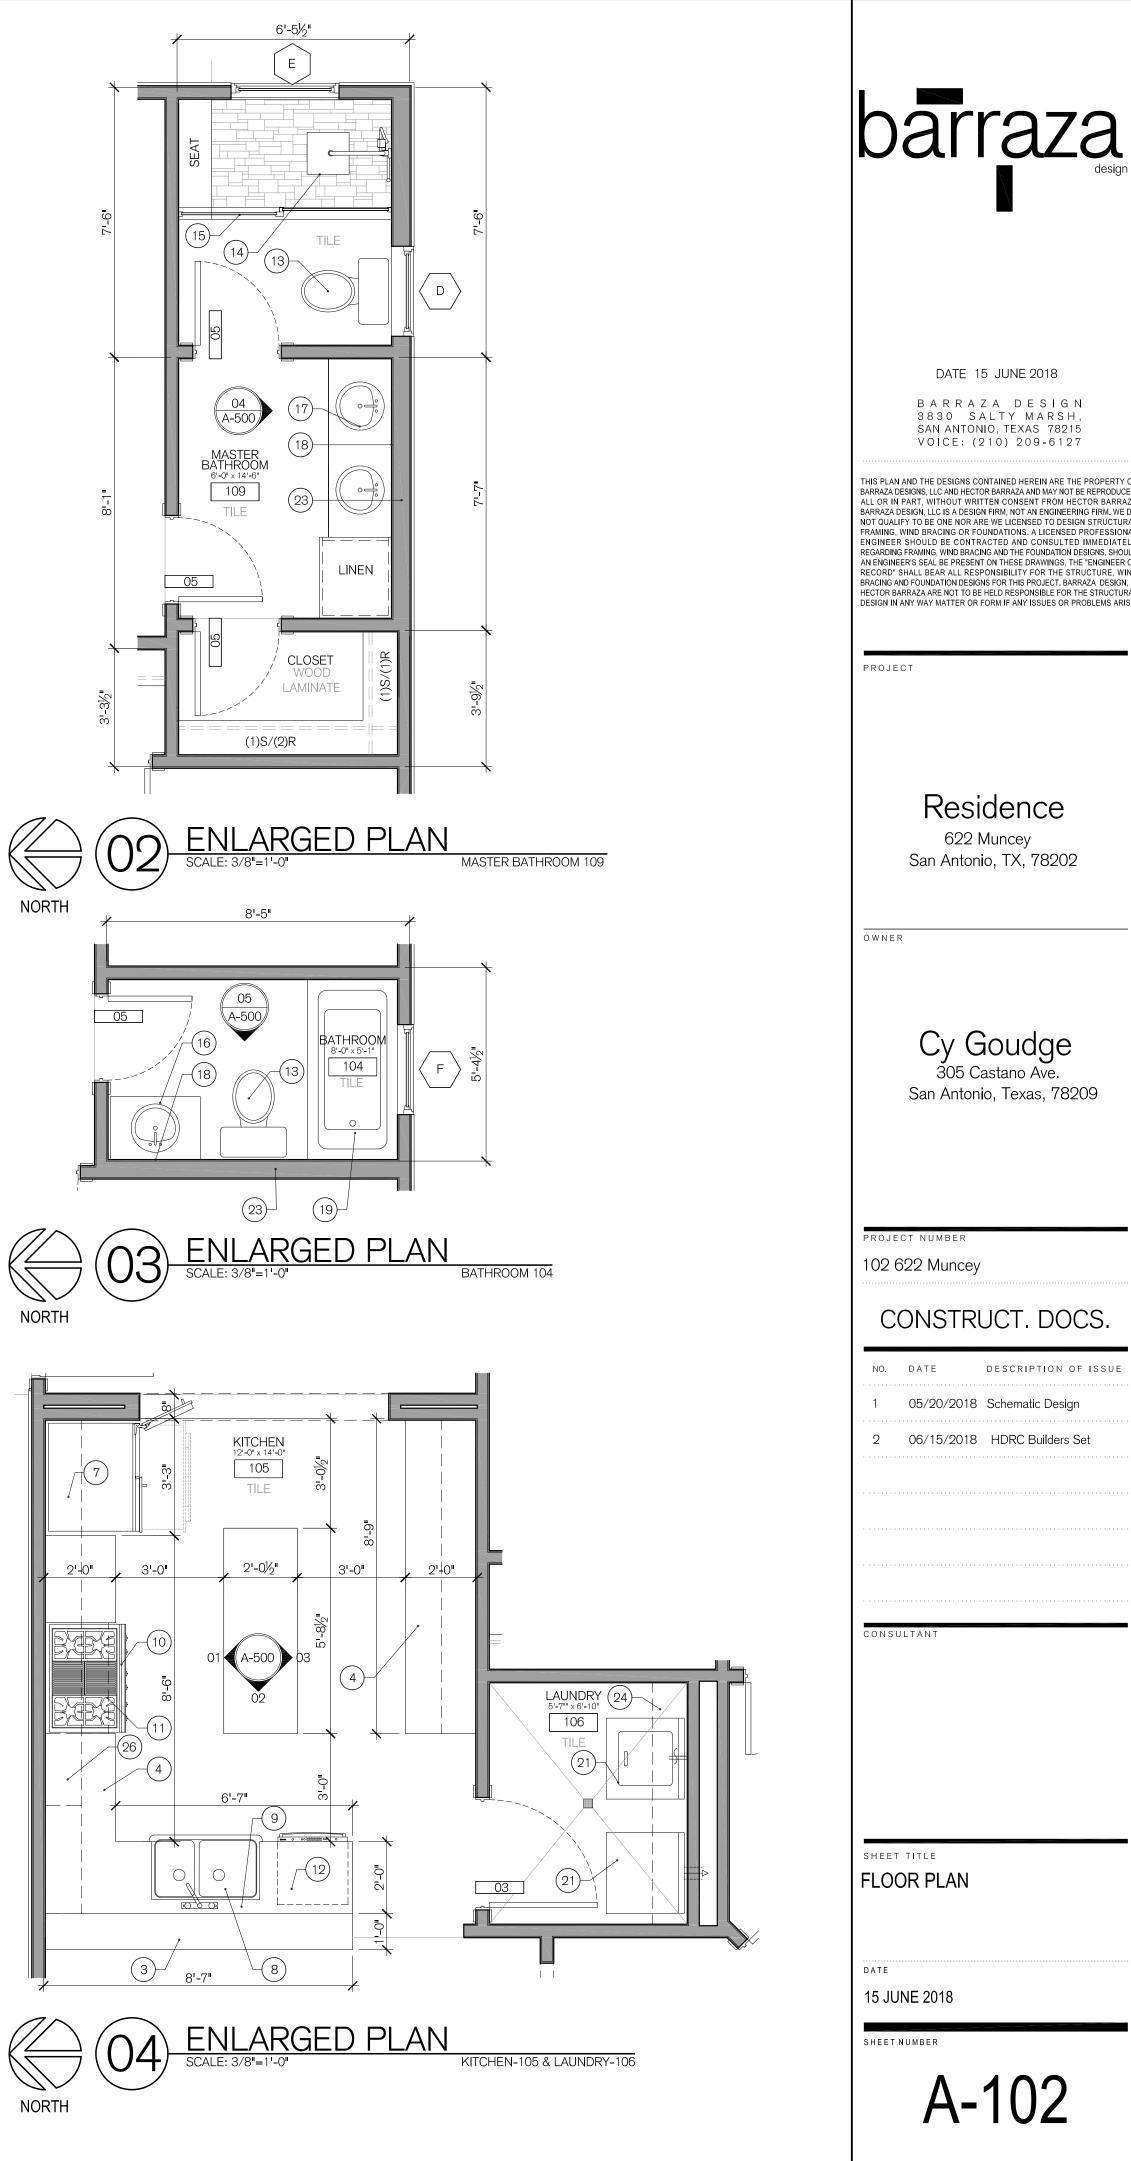

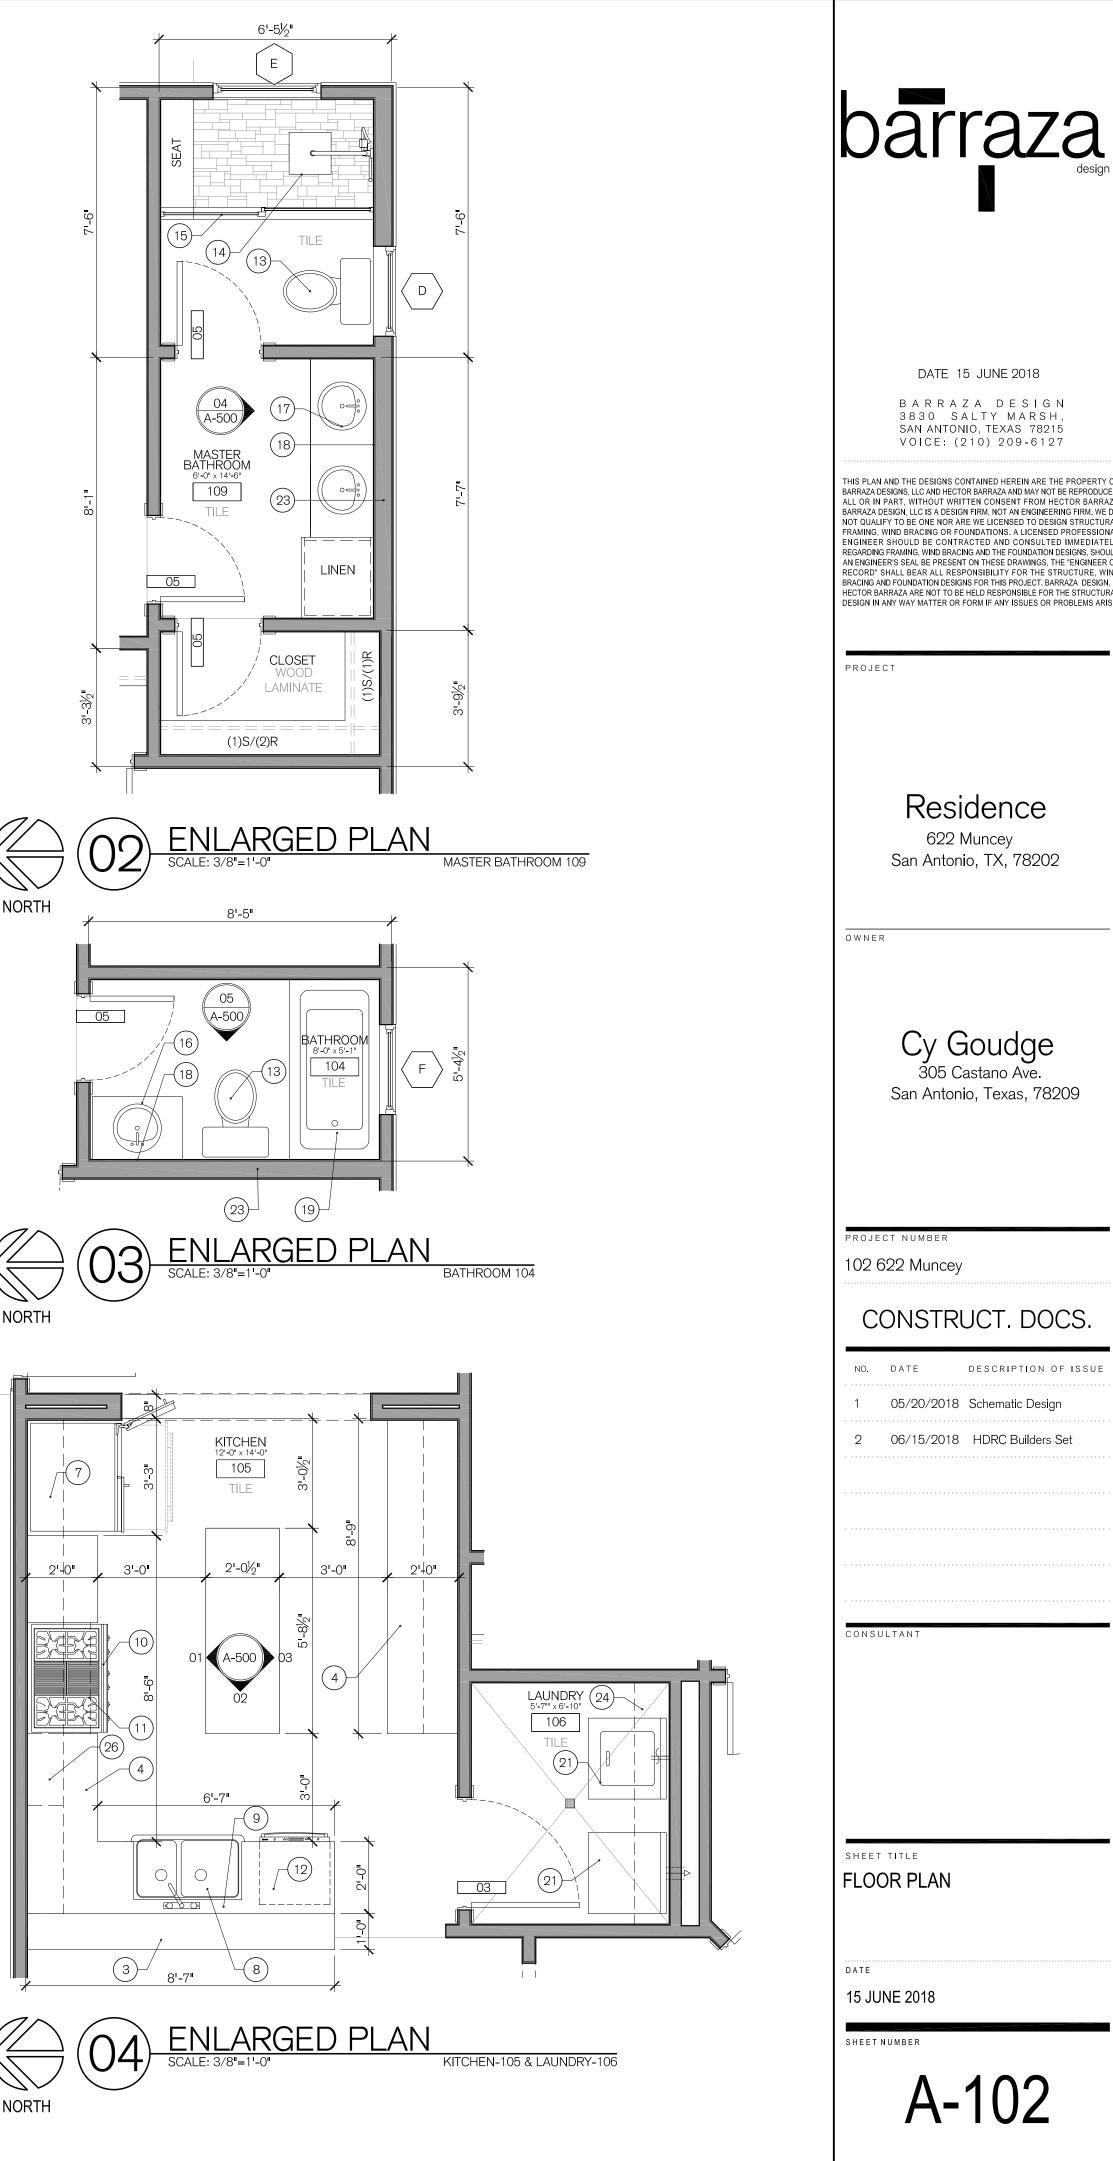


FLOOR PLAN

FIRST FLOOR

PLAN NOTES:

- PROVIDE ELECTRICAL AND/OR GAS AS REQUIRED FOR RANGE, HOT WATER HEATERS, POWER VENTS & HVAC.
- 2. PROVIDE ELECTRICAL W/CUT-OFF SWITCH FOR HVAC CONDENSERS-VERIFY LOCATION W/OWNER.
- ALL SLEEPING AREAS TO BE PROTECTED WITH UL APPROVED SMOKE DETECTORS. POWER TO 110V HOUSE ELECTRICAL POWER SOURCE AND PROVIDE A BATTERY BACK-UP.
- 4. PROVIDE ELECTRICAL OUTLETS AT SOFFITS- VERIFY QUANITYT AND LOCATION WITH OWNER.

ELECTRICAL LEGEND:



CEILING FAN W/ LIGHT KIT



 \square

 \bigcirc

 $\vdash \bigcirc$

 \square

2' x 4' FLUORESCENT LIGHT FIXTURE

INCANDESCENT LIGHT FIXTURE

110 VOLT OUTLET

(GFI) 110 VOLT OUTLET (GFI)

220 VOLT OUTLET

SD SMOKE DETECTOR

LIGHT SWITCH

- HEAT/VENT

TELEPHONE JACK

CABLE JACK (TV)


RECESSED DOWN LIGHTING

WALL MOUNTED LIGHTING

WALL MOUNTED FLOOD LIGHTING

THERMOSTAT

DOOR BELL

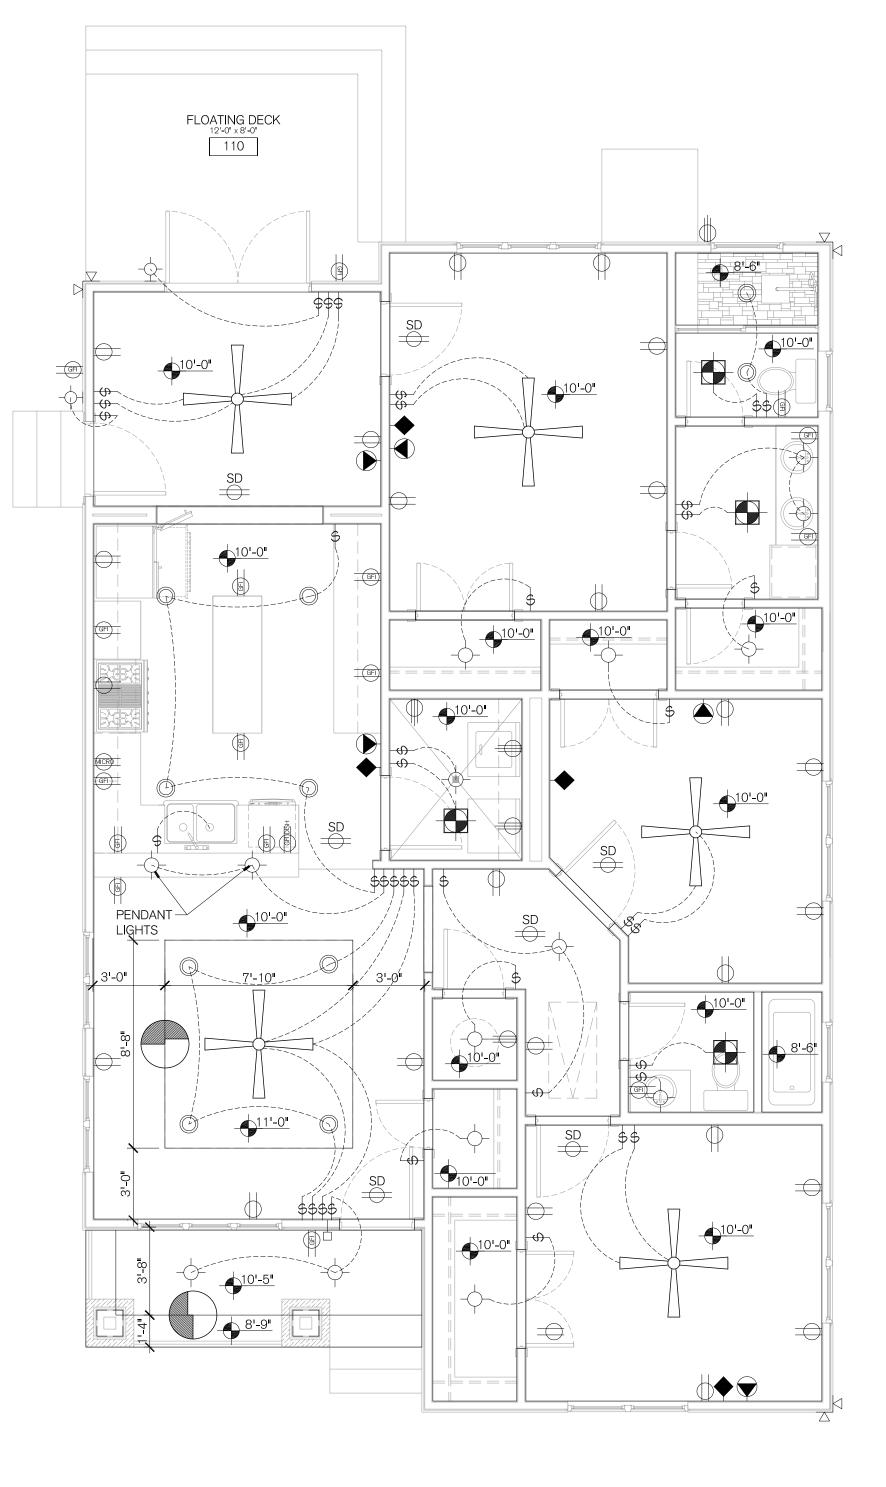




barraza
DATE 15 JUNE 2018 B A R R A Z A D E S I G N 38 30 S A L TY M A R S H, SAN ANTONIO, TEXAS 78215 VOICE: (210) 209-6127 THIS PLAN AND THE DESIGNS CONTAINED HEREIN ARE THE PROPERTY BARRAZA DESIGNS, LLC AND HECTOR BARRAZA AND MAY NOT BE REPRODUCE ALL OR IN PART, WITHOUT WRITTEN CONSENT FROM HECTOR BARRA BARRAZA DESIGN, LLC IS A DESIGN FIRM, NOT AN ENGINEERING FIRM. WEI NOT QUALIFY TO BE ONE NOR ARE WE LICENSED TO DESIGN STRUCTUR FRAMING, WIND BRACING OR FOUNDATIONS. A LICENSED PROFESSION ENGINEER SHOULD BE CONTRACTED AND CONSULTED IMMEDIATE REGARDING FRAMING, WIND BRACING AND THE FOUNDATION DESIGNS, SHOU AN ENGINEER'S SEAL BE PRESENT ON THESE DRAWINGS, THE "ENGINEER' RECORD" SHALL BEAR ALL RESPONSIBILITY FOR THE STRUCTURE, WI BRACING AND FOUNDATION DESIGNS FOR THIS PROJECT. BARRAZA DESIGN, HECTOR BARRAZA ARE NOT TO BE HELD RESPONSIBLE FOR THE STRUCTURE, WI BRACING AND FOUNDATION DESIGNS FOR THIS PROJECT. BARRAZA DESIGN, HECTOR BARRAZA ARE NOT TO BE HELD RESPONSIBLE FOR THE STRUCTURE, WI BRACING AND FOUNDATION DESIGNS FOR THIS PROJECT. BARRAZA DESIGN, HECTOR BARRAZA ARE NOT TO BE HELD RESPONSIBLE FOR THE STRUCTURE, WI BRACING AND FOUNDATION DESIGNS FOR THIS PROJECT. BARRAZA DESIGN, HECTOR BARRAZA ARE NOT TO BE HELD RESPONSIBLE FOR THE STRUCTURE, WI BRACING AND FOUNDATION DESIGNS FOR THIS PROJECT. BARRAZA DESIGN, HECTOR BARRAZA ARE NOT TO BE HELD RESPONSIBLE FOR THE STRUCTURE, WI BRACING AND FOUNDATION DESIGNS FOR THIS PROJECT. BARRAZA ADESIGN, HECTOR BARRAZA ARE NOT TO BE HELD RESPONSIBLE FOR THE STRUCTURE, WI BRACING AND FOUNDATION DESIGNS FOR THIS PROJECT. BARRAZA ARE NOT TO BARRAZA ARE NOT TO BE AND FOUNDATION DESIGNS FOR THIS PROJECT. BARRAZA ARE NOT TO BE AND FOR BARRAZA ARE NOT TO BE AND FOR BARRAZA ARE NOT TO BARCARA
Residence 622 Muncey San Antonio, TX, 78202
PROJECT NUMBER 102 622 Muncey CONSTRUCT. DOCS. NO. DATE DESCRIPTION OF ISSUE 1 05/20/2018 Schematic Design 2 06/15/2018 HDRC Builders Set
sheet title REFLECTED CEILING/ ELECTRICAL PLAN Date 15 JUNE 2018 Sheet number AA-103

PLAN NOTES:

- 1. 6/12 ROOF SLOPE
- 2. TYPICAL ROOF OVERHANG IS 24" (U.N.O.)
- 3. PROVIDE GUTTERS AND DOWNSPOUTS AS DIRECTED BY OWNER.
- 4. STANDING SEAM METAL ROOF, REFER TO MANUFACTURERS SPECIFICATIONS AND INSTALLATION INSTRUCTIONS.
- 5. PAINT ALL ASSOCIATED ROOFING COMPONENTS TO INCLUDE BUT NOT LIMITED TO; FASCIAS , SOFFITS, TRIM, ETC.
- 6. INSTALL ALL NECESSARY FLASHING PER LOCAL CITY CODE -IRC 2015 OR BETTER

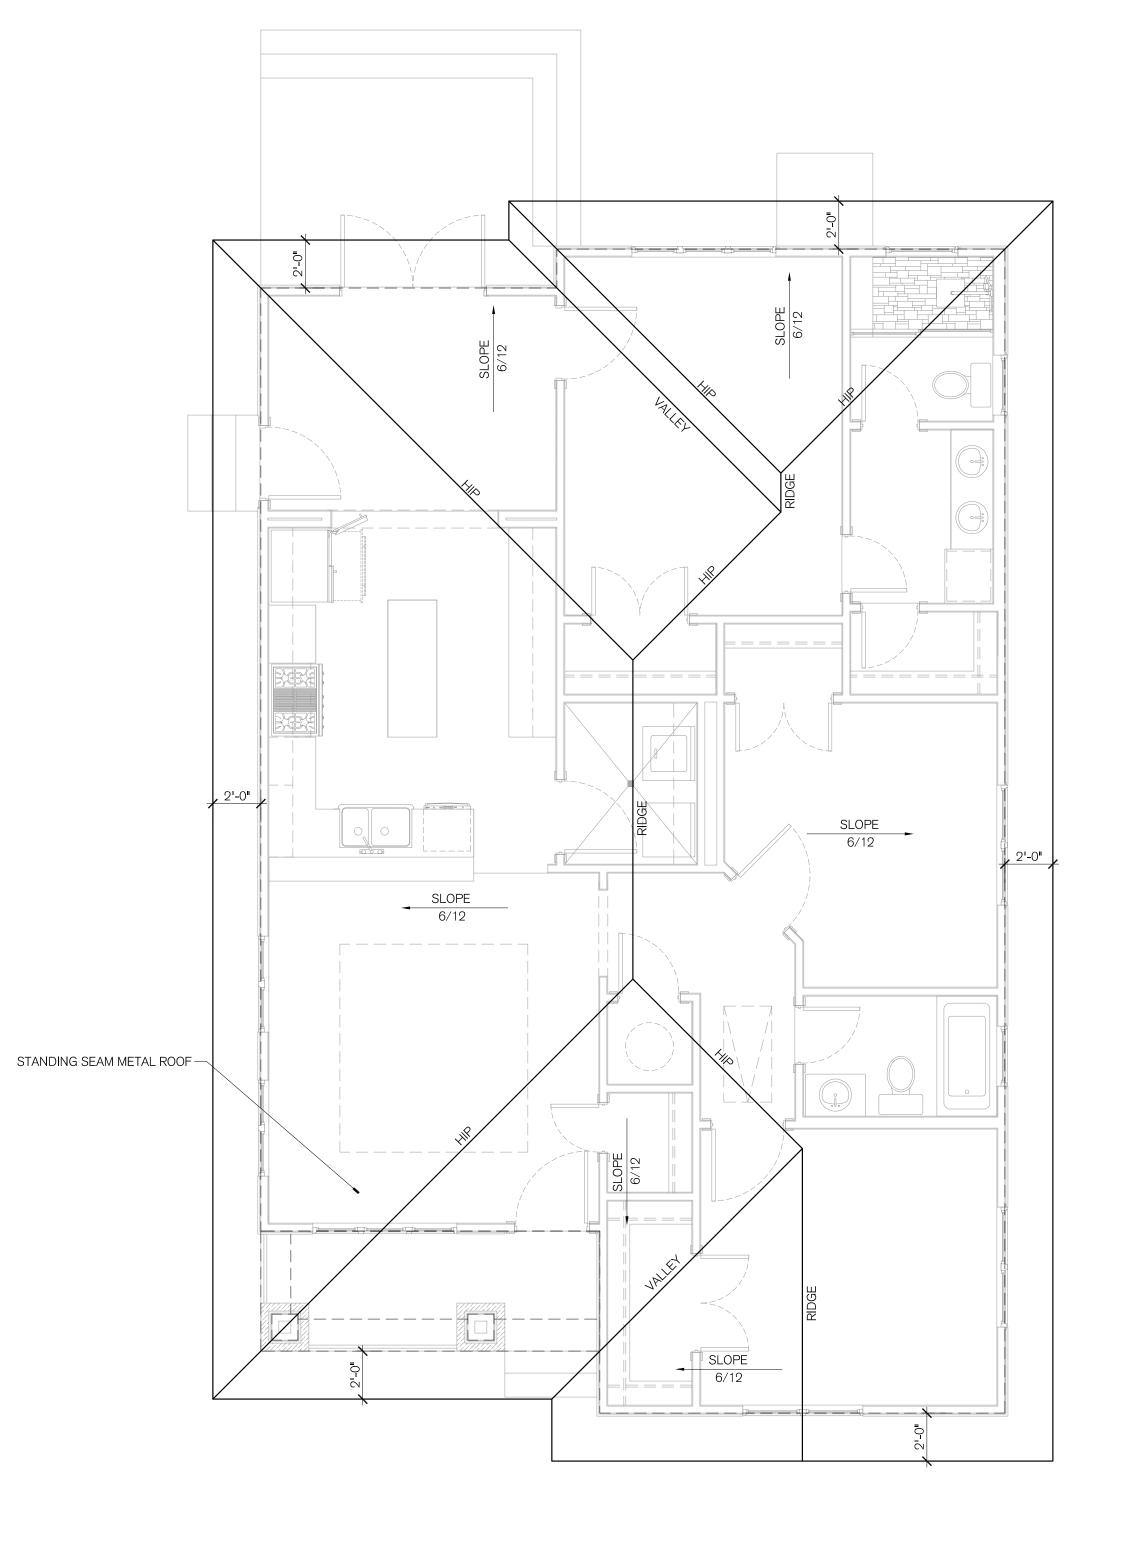



LAN FIRST F

FIRST FLOOR

barraza
DATE 15 JUNE 2018 B A R R A Z A D E S I G N 3830 S A L TY MARSH, SAN ANTONIO, TEXAS 78215 VOICE: (210) 209-6127 THIS PLAN AND THE DESIGNS CONTAINED HEREIN ARE THE PROPERTY BARRAZA DESIGNS, LLC AND HECTOR BARRAZA AND MAY NOT BE REPRODUCE ALL OR IN PART, WITHOUT WRITTEN CONSENT FROM HECTOR BARRA BARRAZA DESIGN, LLC IS A DESIGN FIRM, NOT AN ENGINEERING FIRM. WE I NOT QUALIFY TO BE ONE NOR ARE WE LICENSED TO DESIGN STRUCTUR FRAMING, WIND BRACING OR FOUNDATIONS. A LICENSED PROFESSION ENGINEER SHOULD BE CONTRACTED AND CONSULTED IMMEDIATE REGARDING FRAMING, WIND BRACING AND THE FOUNDATION DESIGNS. SHOU AN ENGINEER'S SEAL BE PRESENT ON THESE DRAWINGS, THE "ENGINEER" RECORD SHALL BEAR ALL RESPONSIBILITY FOR THE STRUCTURE, WI BRACING AND FOUNDATION DESIGNS FOR THIS PROJECT. BARRAZA DESIGN, HECTOR BARRAZA ARE NOT TO BE HELD RESPONSIBLE FOR THE STRUCTURE WIND BRACING AND FOUNDATION DESIGNS FOR THIS PROJECT. BARRAZA DESIGN, HECTOR BARRAZA ARE NOT TO BE HELD RESPONSIBLE FOR THE STRUCTURE MEDINEER'S SHOULD BE CONTRACTED FOR THE STRUCTURE, WIND BRACING AND FOUNDATION DESIGNS FOR THIS PROJECT. BARRAZA DESIGN, HECTOR BARRAZA ARE NOT TO BE HELD RESPONSIBLE FOR THE STRUCTURE, WIND BRACING AND FOUNDATION DESIGNS FOR THIS PROJECT. BARRAZA DESIGN, HECTOR BARRAZA ARE NOT TO BE HELD RESPONSIBLE FOR THE STRUCTURE, WIND BRACING AND FOUNDATION DESIGNS FOR THIS PROJECT. BARRAZA DESIGN, HECTOR BARRAZA ARE NOT TO BE HELD RESPONSIBLE FOR THE STRUCTURE, WIND BRACING AND FOUNDATION DESIGNS FOR THIS PROJECT. BARRAZA DESIGN, HECTOR BARRAZA ARE NOT TO BE HELD RESPONSIBLE FOR THE STRUCTURE, WIND BRACING AND FOUNDATION DESIGNS FOR THIS PROJECT. BARRAZA DESIGN, HECTOR BARRAZA ARE NOT TO BE HELD RESPONSIBLE FOR THE STRUCTURE, WIND BRACING AND FOUNDATION DESIGNS FOR THIS PROJECT. BARRAZA DESIGN, HECTOR BARRAZA ARE NOT TO BE HELD RESPONSIBLE FOR THE STRUCTURE OR FORM IF ANY ISSUES OR PROBLEMS ARD
Residence 622 Muncey San Antonio, TX, 78202
PROJECT NUMBER 102 622 Muncey CONSTRUCT. DOCS. NO. DATE DESCRIPTION OF ISSUE 1 05/20/2018 Schematic Design 2 06/15/2018 HDRC Builders Set
sheet title ROOF PLAN date 15 JUNE 2018 sheet number A-104

GENERAL NOTES:


- 1. PROVIDE DOWNSPOUTS AND GUTTERS AS DIRECTED BY OWNER.
- 2. SLOPE GRADE AWAY FROM RESIDENCE FOR DRAINAGE.
- 3. REFER TO WINDOW SCHEDULE FOR WINDOW SILL HEIGHTS AND SIZES.
- 4. ALL WINDOW AND DOOR DESIGNS TO BE SELECTED BY OWNER.
- 5. ALL EXTERIOR TRIM AND SIDING TO BE PAINTED, COLOR BY OWNER.

KEY NOTES:

- STANDING SEAM METAL ROOF.
 STANDING SEAM METAL ROOF FLASHING
- 3. HARDIE PLANK LAP SIDING
- STONE COLUMN TO MATCH EXISTING
 CONCRETE STAIRS & FOUNDATION, REFER TO
- STRUCTURE . 6. EXPOSED RAFTERS @ 24"O.C.
- 7. EXPOSED WOOD BRACKET
- A/C CONDENSER BY OTHERS.
 AZEK TRIM BOARD BY OWNER
- 10. AZEK MOULDING BY OWNER 11. AZEK COLUMN WRAP BY OWNER
- 12. WOOD STAIRS BY OWNER.
- 13. WOOD DECK BY OWNER
 14. WOOD FENCE AND GATE BY OWNER
 15. 4' WOOD TRIM BOARD


T.O.B. ELEV.=10'-5-1/2"		6
<u>T.O.P.</u>		
		9
		(11)
	(14)	
FINISH FLOOR LEVEL		



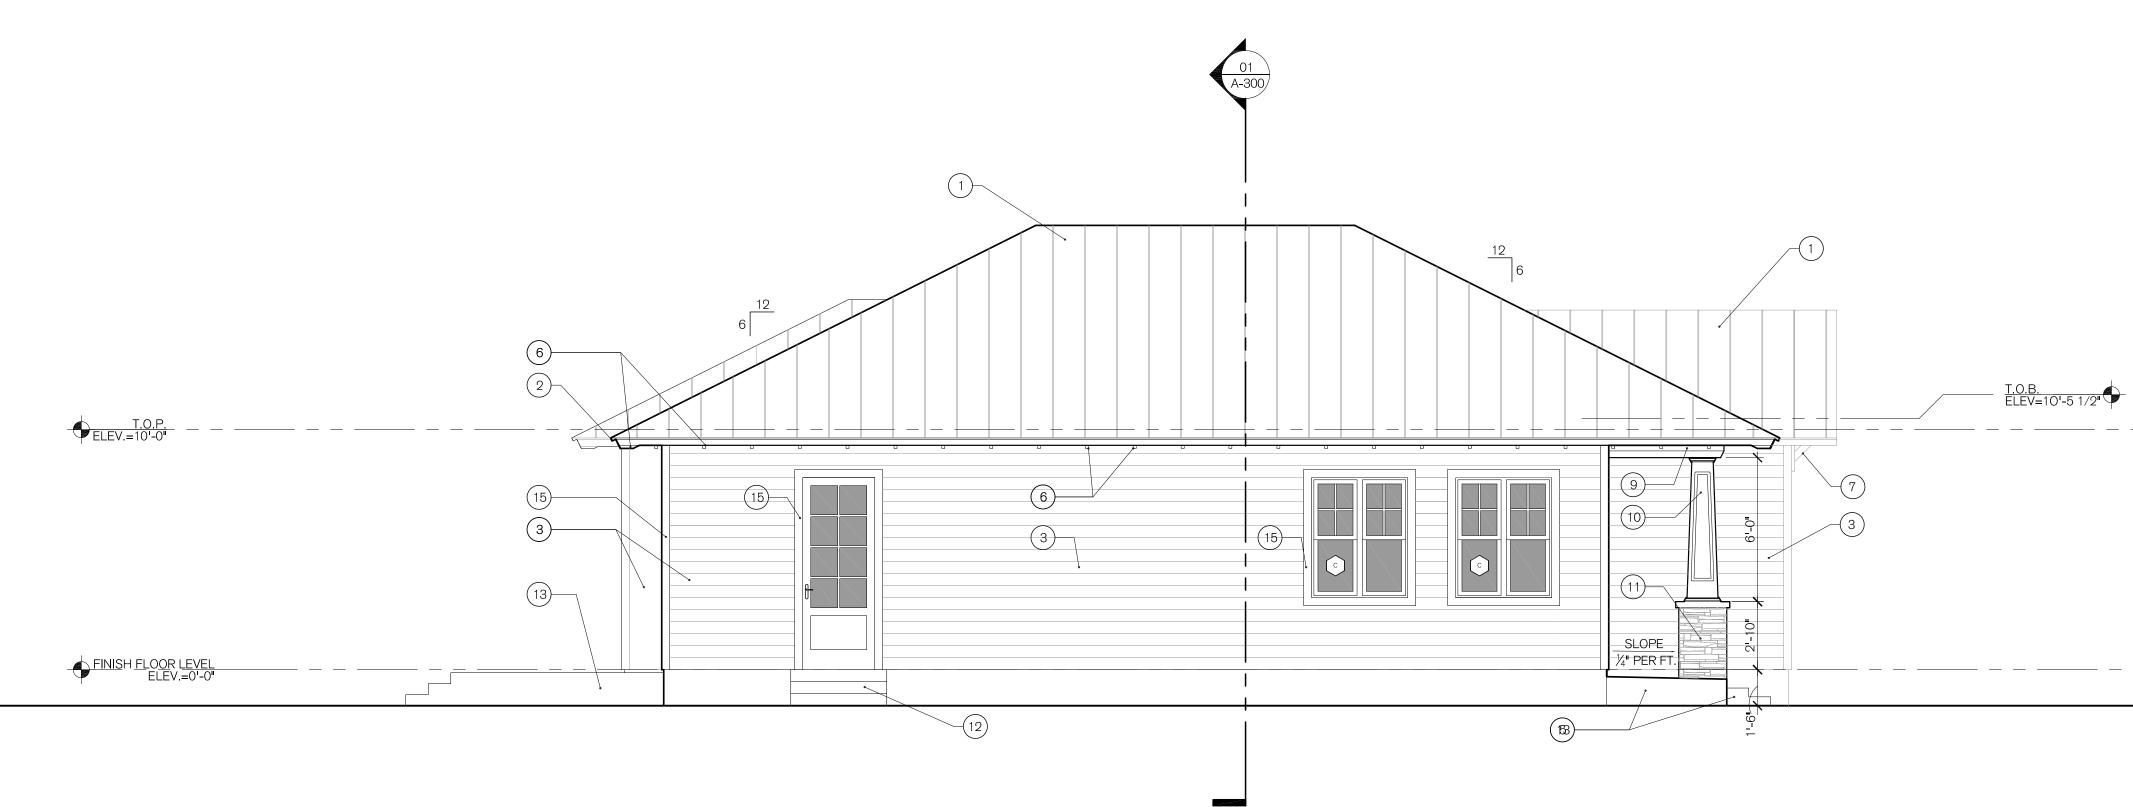



NORTH

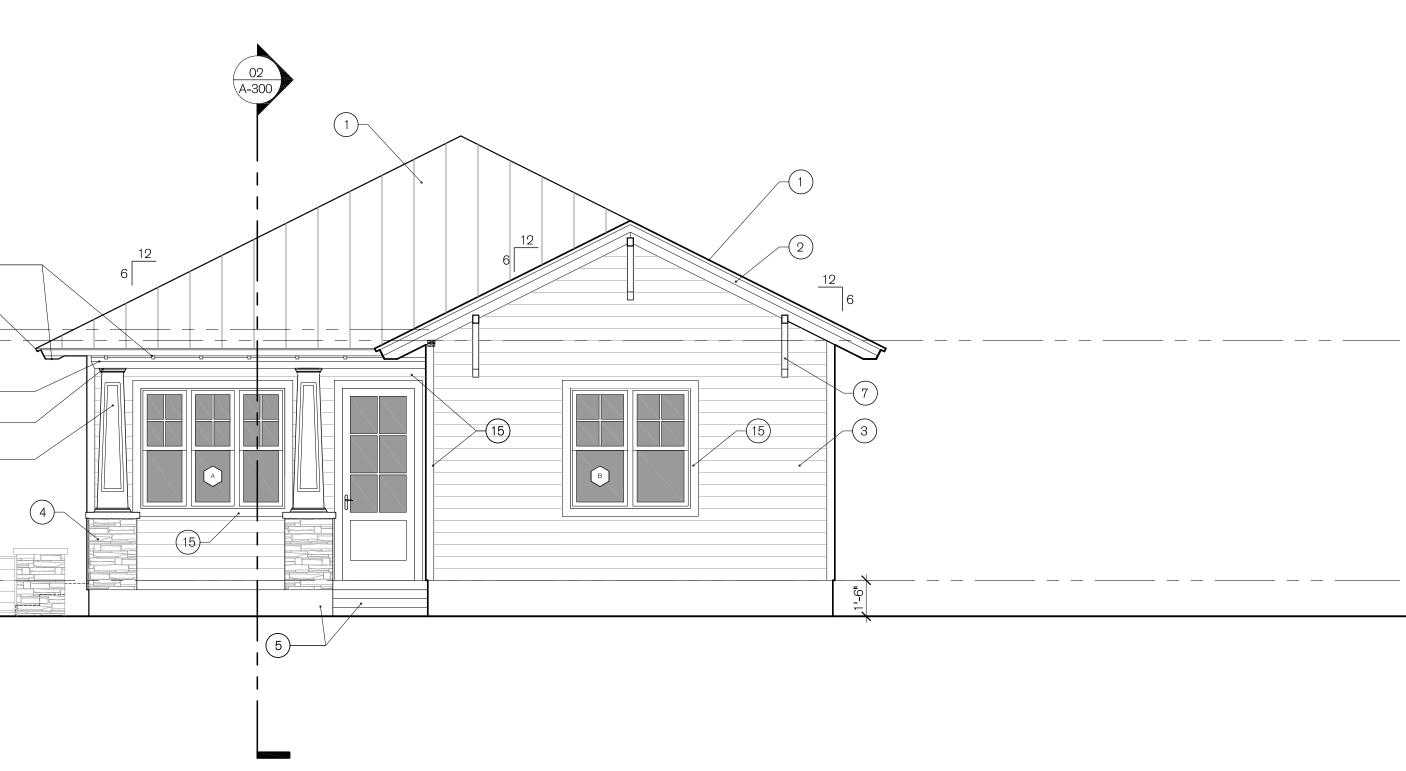

barraza
DATE 15 JUNE 2018 B A R R A Z A D E S I G N 3 8 3 0 S A L T Y M A R S H, S AN ANTONIO, TEXAS 78215 V O I C E : (210) 209-6127 THIS PLAN AND THE DESIGNS CONTAINED HEREIN ARE THE PROPERTY OF BARRAZA DESIGNS, LLC AND HECTOR BARRAZA AND MAY NOT BE REPRODUCED, ALL OR IN PART, WITHOUT WRITTEN CONSENT FROM HECTOR BARRAZA BARRAZA DESIGN, LLC AND HECTOR BARRAZA AND MAY NOT BE REPRODUCED, ALL OR IN PART, WITHOUT WRITTEN CONSENT FROM HECTOR BARRAZA BARRAZA DESIGN, LLC IS A DESIGN FIRM, NOT AN ENGINEERING FIRM, WE DO NOT QUALIFY TO BE ONE NOR ARE WE LICENSED TO DESIGN STRUCTURAL FRAMING, WIND BRACING OR FOUNDATIONS. A LICENSED PROFESSIONAL ENGINEER SHOULD BE CONTRACTED AND CONSULTED IMMEDIATELY REGARDING FRAMING, WIND BRACING AND THE FOUNDATION DESIGNS, SHOULD AN ENGINEER'S SEAL BE PRESENT ON THESE DRAWINGS, THE "ENGINEER OF RECORD" SHALL BEAR ALL RESPONSIBILITY FOR THE STRUCTURE, WIND BRACING AND FOUNDATION DESIGNS FOR THIS PROJECT. BARRAZA DESIGN, & HECTOR BARRAZA ARE NOT TO BE HELD RESPONSIBILITY FOR THE STRUCTURE, WIND BRACING AND FOUNDATION DESIGNS FOR THIS PROJECT. BARRAZA DESIGN, & HECTOR BARRAZA ARE NOT TO BE HELD RESPONSIBIL FOR THE STRUCTURE, WIND BRACING AND FOUNDATION DESIGNS FOR THIS PROJECT. BARRAZA DESIGN, & HECTOR BARRAZA ARE NOT TO BE HELD RESPONSIBIL FOR THE STRUCTURE, WIND BRACING AND FOUNDATION DESIGNS FOR THIS PROJECT. BARRAZA ADESIGN, & HECTOR BARRAZA ARE NOT TO BE HELD RESPONSIBLE FOR THE STRUCTURE, WIND BRACING AND FOUNDATION DESIGNS FOR THIS PROJECT. BARRAZA ADESIGN, & HECTOR BARRAZA ARE NOT TO BE HELD RESPONSIBLE TOR THE STRUCTURE, WIND BRACING AND FOUNDATION DESIGNS FOR THIS PROJECT. BARRAZA ADESIGN, & HECTOR BARRAZA ARE NOT TO BE HELD RESPONSIBLE TOR THE STRUCTURE, WIND BRACING AND FOUNDATION DESIGNS FOR THIS PROJECT. BARRAZA ADESIGN, & HECTOR BARRAZA AND FOUNDATION DESIGNS FOR THIS PROJECT. BARRAZA DESIGN, & HECTOR BARRAZA AND FOUNDATION DESIGNS FOR THIS PROJECT. BARRAZA DESIGN, & HECTOR BARRAZA AND FOUNDATION DESIGNS FOR THIS PROJECT. BARRAZA DESIGN, & HECTOR BARAZA AND FOUNDATION DESIGNS FOR
<section-header><text><text><text><section-header></section-header></text></text></text></section-header>
PROJECT NUMBER 102 622 Muncey CONSTRUCT. DOCS. NO. DATE DESCRIPTION OF ISSUE 1 05/20/2018 Schematic Design 2 06/15/2018 HDRC Builders Set
CONSULTANT
SHEET TITLE EXTERIOR ELEVATIONS
sheet number A-200

GENERAL NOTES:


- 1. PROVIDE DOWNSPOUTS AND GUTTERS AS DIRECTED BY OWNER.
- 2. SLOPE GRADE AWAY FROM RESIDENCE FOR DRAINAGE.
- 3. REFER TO WINDOW SCHEDULE FOR WINDOW SILL HEIGHTS AND SIZES.
- 4. ALL WINDOW AND DOOR DESIGNS TO BE SELECTED BY OWNER.
- 5. ALL EXTERIOR TRIM AND SIDING TO BE PAINTED, COLOR BY OWNER.

KEY NOTES:

- STANDING SEAM METAL ROOF.
 STANDING SEAM METAL ROOF FLASHING
- HARDIE PLANK LAP SIDING
 STONE COLUMN TO MATCH EXISTING
 CONCRETE STAIRS & FOUNDATION, REFER TO
- STRUCTURE . 6. EXPOSED RAFTERS @ 24"O.C.
- 7. EXPOSED WOOD BRACKET
- 8. A/C CONDENSER BY OTHERS. 9. AZEK TRIM BOARD BY OWNER
- 10. AZEK MOULDING BY OWNER
- 11. AZEK COLUMN WRAP BY OWNER 12. WOOD STAIRS BY OWNER.
- 13. WOOD DECK BY OWNER
 14. WOOD FENCE AND GATE BY OWNER
 15. 4' WOOD TRIM BOARD


6— 2 ____ 3— FINISH FLOOR LEVEL ELEV.=0'-0"



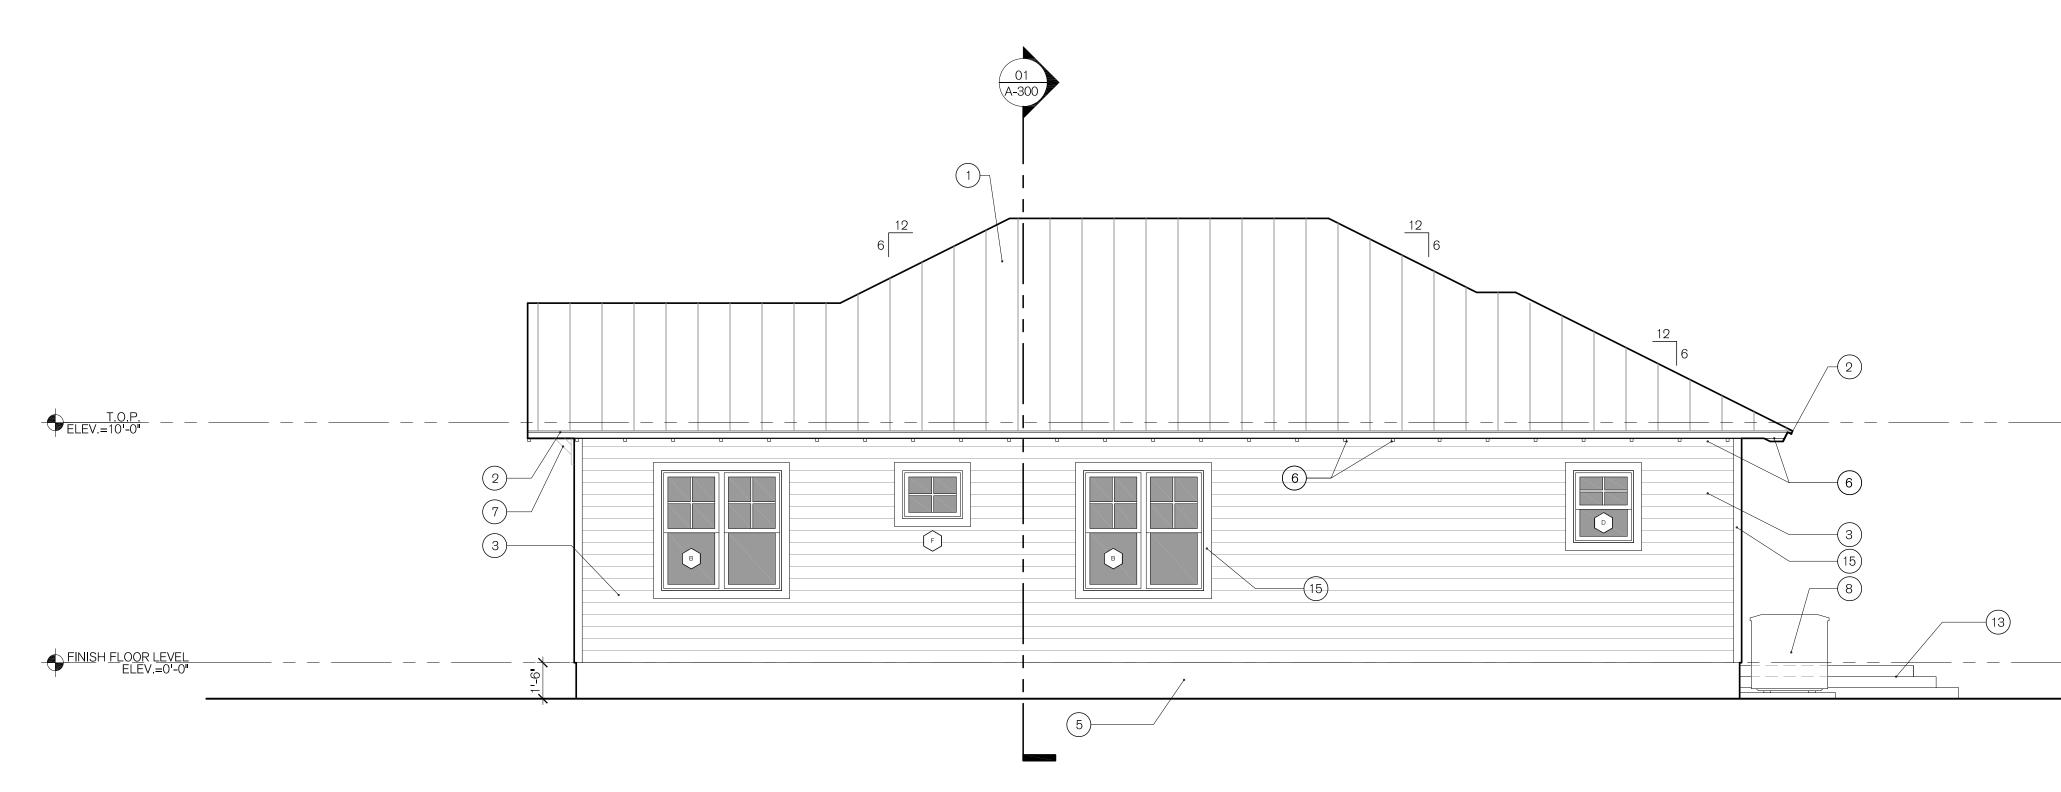




SOUTH

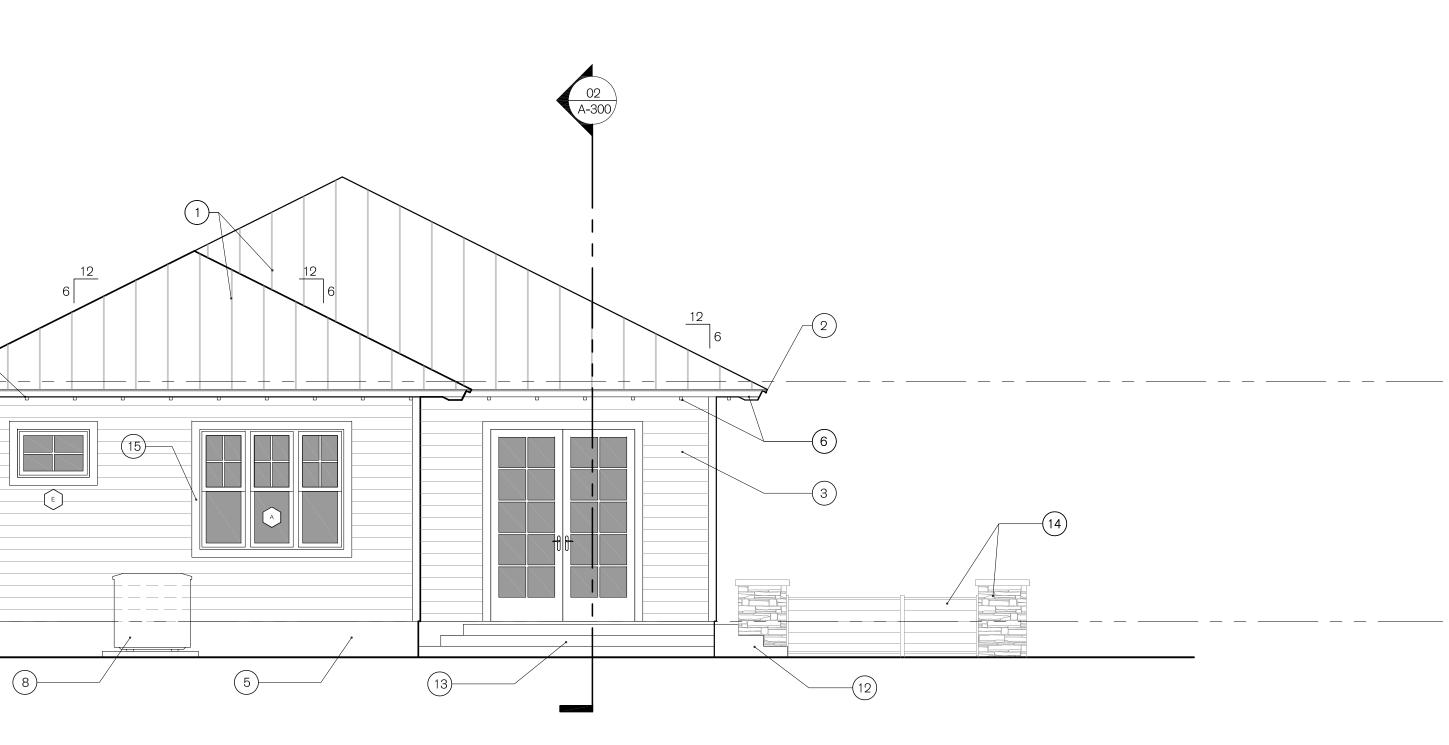

barraza
DATE 15 JUNE 2018 B A R R A Z A D E S I G N 3830 S A L T Y M A R S H, SAN ANTONIO, TEXAS 78215 VOICE: (210) 209-6127 THIS PLAN AND THE DESIGNS CONTAINED HEREIN ARE THE PROPERTY O BARRAZA DESIGNS, LLC AND HECTOR BARRAZA AND MAY NOT BE REPRODUCED ALL OR IN PART, WITHOUT WRITTEN CONSENT FROM HECTOR BARRAZ BARRAZA DESIGN, LLC IS A DESIGN FRM, NOT AN ENGINEERING FIRM. WE D NOT QUALIFY TO BE ONE NOR ARE WE LICENSED TO DESIGN STRUCTURA FRAMING, WIND BRACING OR FOUNDATIONS. A LICENSED PROFESSIONA ENGINEER SHOULD BE CONTRACTED AND CONSULTED IMMEDIATELT REGARDING FRAMING, WIND BRACING AND THE FOUNDATION DESIGNS, SHOUL AN ENGINEER'S SEAL BE PRESENT ON THESE DRAWINGS, THE "ENGINEER O RECORD" SHALL BEAR ALL RESPONSIBILITY FOR THE STRUCTURE, WIN BRACING AND FOUNDATION DESIGNS FOR THIS PROJECT. BARRAZA DESIGN, HECTOR BARRAZA ARE NOT TO BE HELD RESPONSIBLE FOR THE STRUCTURE, WIN BRACING AND FOUNDATION DESIGNS FOR THIS PROJECT. BARRAZA DESIGN, HECTOR BARRAZA ARE NOT TO BE HELD RESPONSIBLE FOR THE STRUCTURE, DESIGN IN ANY WAY MATTER OR FORM IF ANY ISSUES OR PROBLEMS ARISE
Residence 622 Muncey San Antonio, TX, 78202
PROJECT NUMBER 102 622 Muncey CONSTRUCT. DOCS. NO. DATE DESCRIPTION OF ISSUE 1 05/20/2018 Schematic Design 2 06/15/2018 HDRC Builders Set
CONSULTANT SHEET TITLE EXTERIOR ELEVATIONS DATE 15 JUNE 2018 SHEET NUMBER A-201

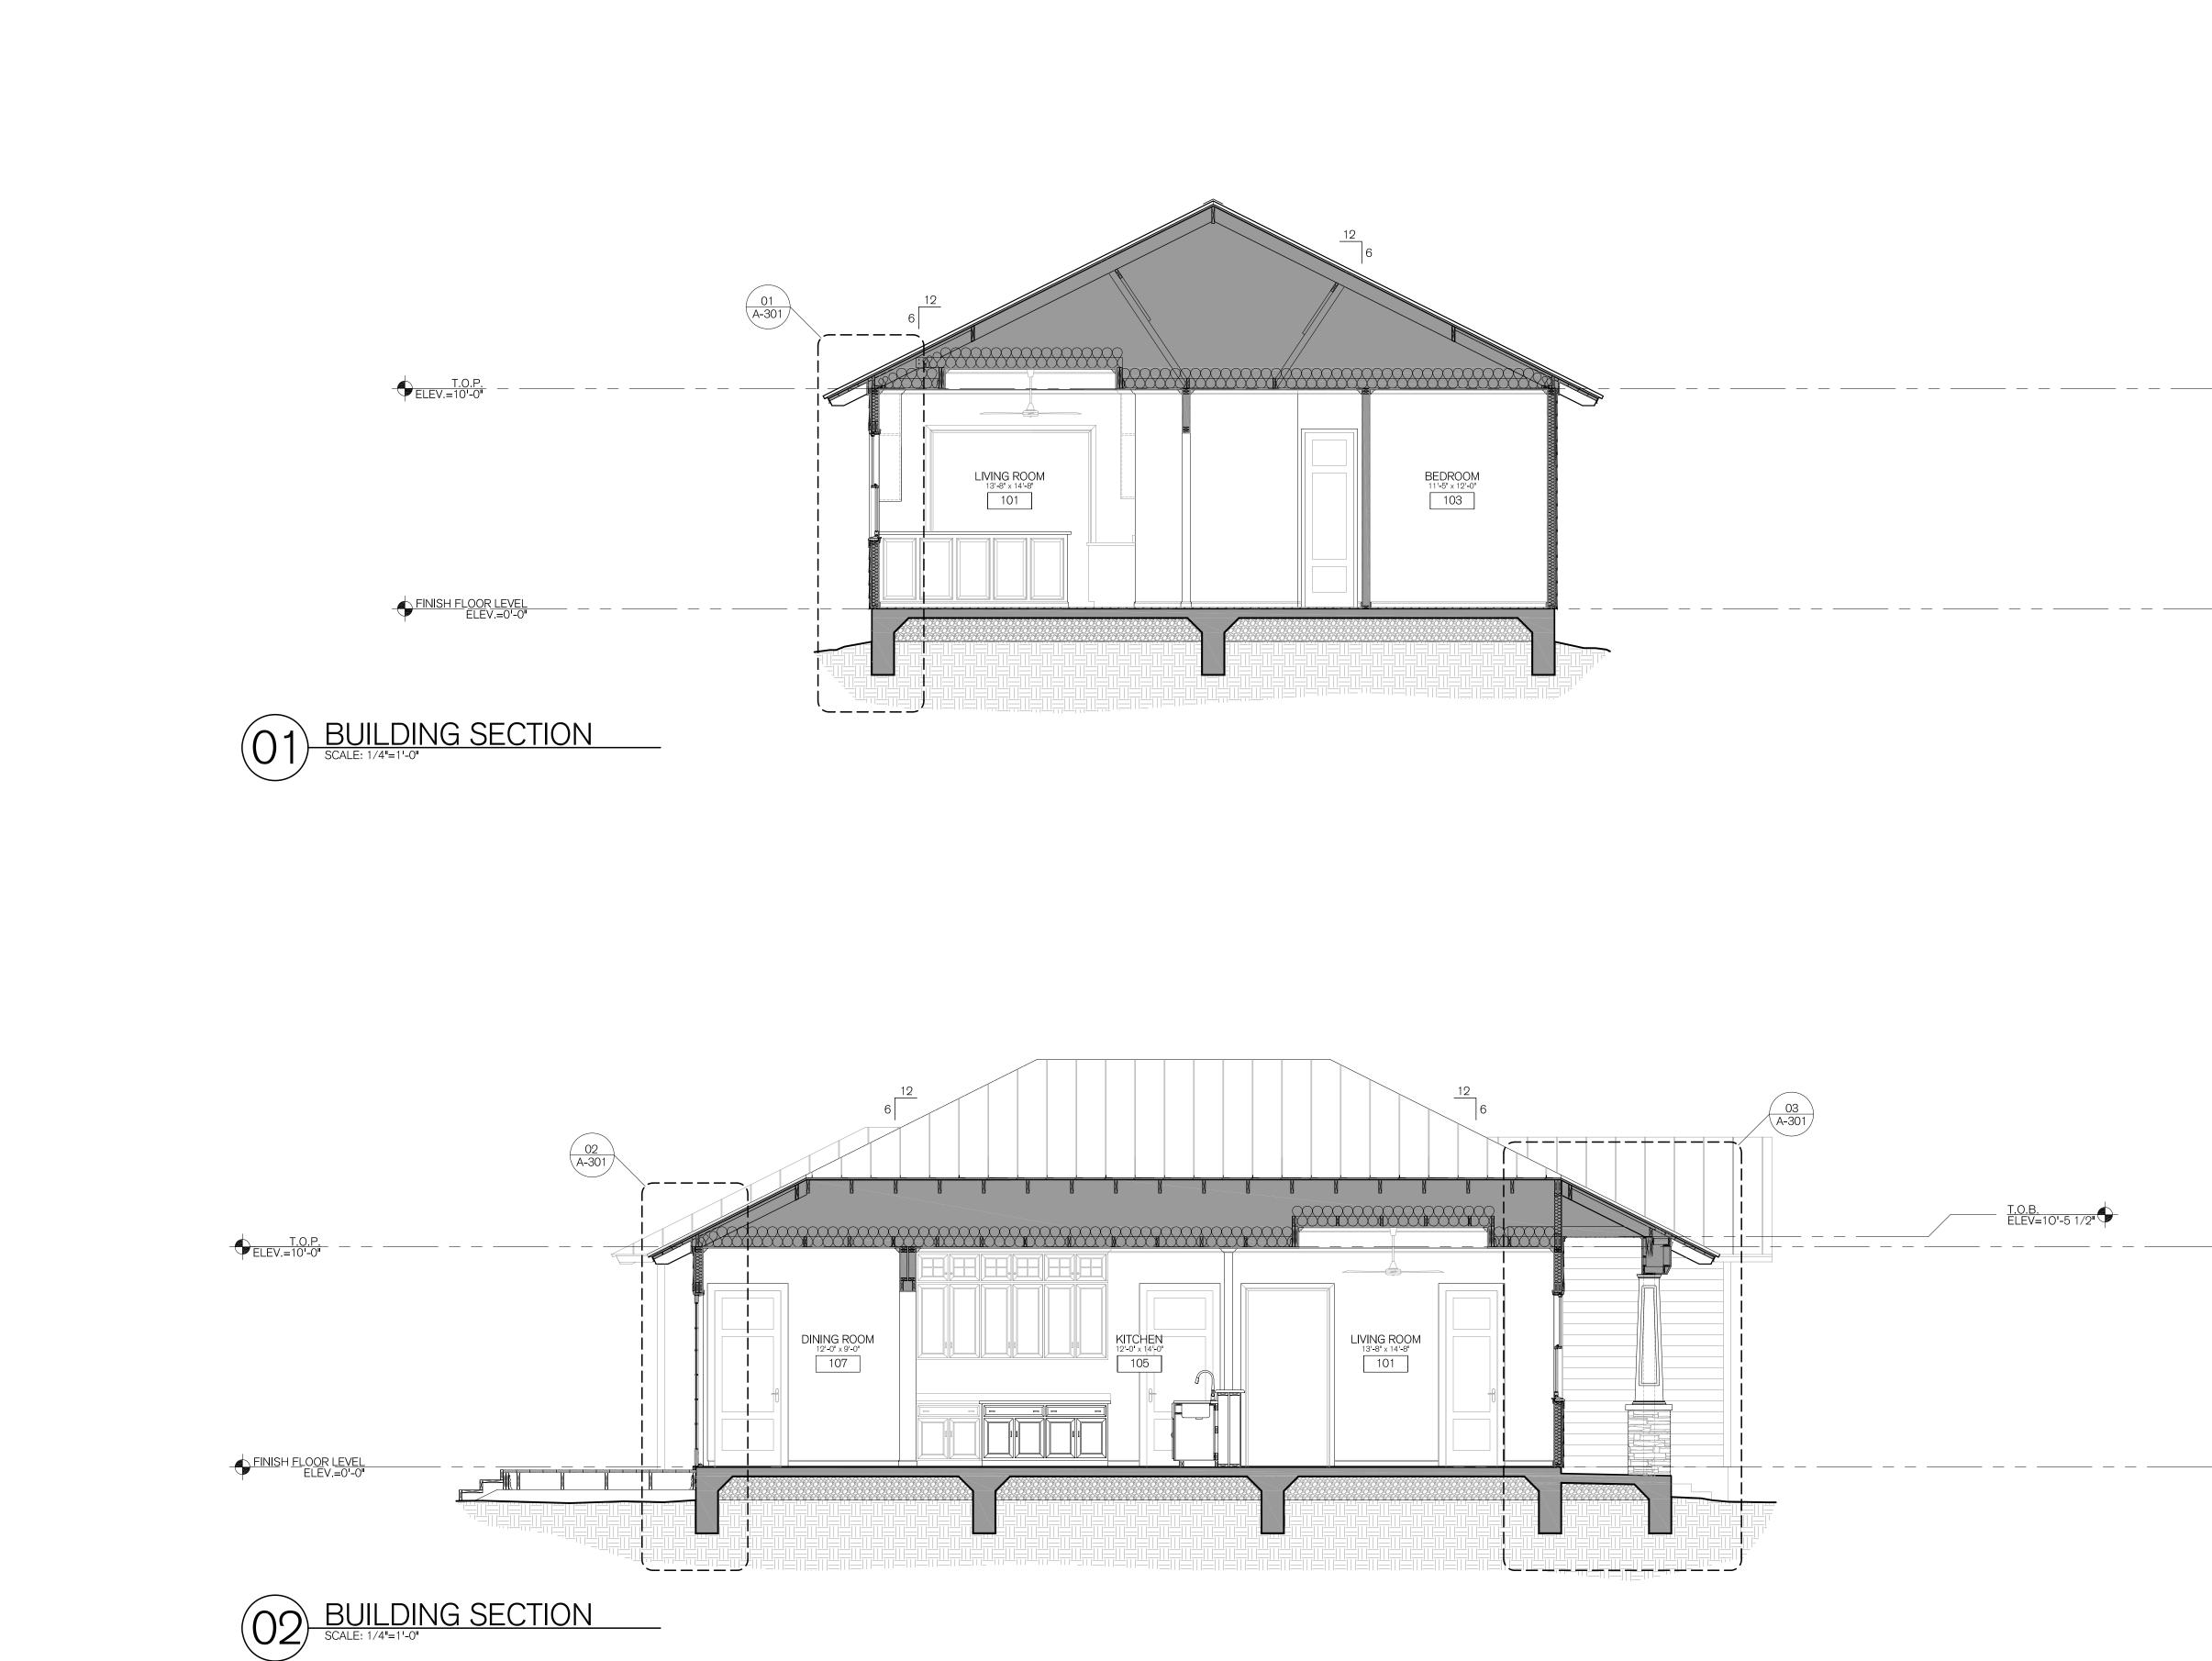

barraza
DATE 15 JUNE 2018 B A R R A Z A D E S I G N 3830 S A L T Y M A R S H, SAN ANTONIO, TEXAS 78215 VOICE: (210) 209-6127 THIS PLAN AND THE DESIGNS CONTAINED HEREIN ARE THE PROPERTY O BARRAZA DESIGNS, LLC AND HECTOR BARRAZA AND MAY NOT BE REPRODUCE ALL OR IN PART, WITHOUT WRITTEN CONSENT FROM HECTOR BARRAZ BARRAZA DESIGN, LLC IS A DESIGN FIRM, NOT AN ENGINEERING FIRM. WED NOT QUALIFY TO BE ONE NOR ARE WE LICENSED TO DESIGN STRUCTURA FRAMING, WIND BRACING OR FOUNDATIONS. A LICENSED PROFESSIONA ENGINEER SHOULD BE CONTRACTED AND CONSULTED IMMEDIATEL REGARDING FRAMING, WIND BRACING AND THE FOUNDATION DESIGNS. SHOUL AN ENGINEER'S SEAL BE PRESENT ON THESE DRAWINGS, THE "ENGINEER O RECORD" SHALL BEAR ALL RESPONSIBILITY FOR THE STRUCTURE, WIN BRACING AND FOUNDATION DESIGNS FOR THIS PROJECT. BARRAZA DESIGN, HECTOR BARRAZA ARE NOT TO BE HELD RESPONSIBLE FOR THE STRUCTURE, WIN BRACING AND FOUNDATION DESIGNS FOR THIS PROJECT. BARRAZA DESIGN, HECTOR BARRAZA ARE NOT TO BE HELD RESPONSIBLE FOR THE STRUCTURE, WIN BRACING AND FOUNDATION DESIGNS FOR THIS PROJECT. BARRAZA DESIGN, HECTOR BARRAZA ARE NOT TO BE HELD RESPONSIBLE FOR THE STRUCTURE, WIN BRACING AND YWAY MATTER OR FORM IF ANY ISSUES OR PROBLEMS ARIS
Residence 622 Muncey San Antonio, TX, 78202
Cy Goudge 305 Castano Ave. San Antonio, Texas, 78209
PROJECT NUMBER 102 622 Muncey CONSTRUCT. DOCS.
NO.DATEDESCRIPTION OF ISSUE105/20/2018Schematic Design206/15/2018HDRC Builders Set
CONSULTANT
SHEET TITLE BUILDING SECTIONS
DATE 15 JUNE 2018 Sheet number
A-300

- <u>T.O.B.</u> ELEV=10'-5 1/2"

¾"PLYWOOD DECK, REFER TO STRUCTURE		I	
INSULATION BAFFLE			
WATER RESISTIVE BARRIER MEMBRANE AT TOP PLATE OVER SHEATHING,CAULK AT GYP. BD.			
BLOCKING W/ V" NOTCH VENTILATION AND BUG SCREEN, 2 PER BAY		\	
STANDING SEAM METAL ROOF OVER WATER PROOFING UNDERLAYMENT			
2x4 DOUGLAS FIR TONGUE AND GROOVE BOARDS, EXPOSED, PTD,			
1X8 FASCIA BOARD, W/ 2" CIRCULAR VENTS,(2) PER BAY			
CONTINUOUS FLASHING W/ DRIP EDGE			- R38 BATT INSULATION - 2X WOOD JOISTS,
EXPOSED 2X8 DOUGLAS-FIR RAFTERS (24" O.C.) TO MATCH 2X WOOD RAFTERS. REMOVE 1-1/2" FROM EXPOSED RAFTER TO ALLOW FOR 2x4			REFER TO STRUCTURE —(2)2x4 TOP PLATE — GYP. BOARD,PTD.
TONGUE AND GROOVE BOARDS TO BE FLUSH W/ STRUCTURAL RAFTERS. REFER TO STRUCTURE			– 2x WOOD HEADER, REFER TO STRUCTURE
2X WOOD BLOCKING W/ COR-A-VENT SCREEN			
HARDIE PLANK SIDING , PTD,			
WATER RESISTIVE BARRIER \longrightarrow OVER $\frac{1}{2}$ " SHEATHING,			
WOOD WINDOW AS SCHEDULED, —— INSTALL PER MFR. SPECS.			
4" WOOD TRIM			
HARDIE PLANK SIDING , PTD,			
2x4 WOOD STUDS @ 16" O.C.			-TRIM BY OWNER
W/ R13 BATT INSULATION WATER RESISTIVE BARRIER			—WOOD LAMINATE FLOORING, BY OWNER
OVER 1/2" SHEATHING,			
METAL FLASHING		⊲5	
2x4 TREATED SILL PLATE W/ ANCHOR BOLTS @ 4'-0" O.C. OVER SILL GASKET. SEAL ANY PENETRATIONS W/ FOAM INSULATION			
COMPACT EXISTING SUB			
CONCRETE FOUNDATION,			
6 MIL. VISQUEEN MEMBRANE	/		
POLY-SEAL FOAM ALL JOINTS @ OPENINGS		I	



³/₄"PLYWOOD DECK, REFER TO —— STRUCTURE INSULATION BAFFLE -

MEMBRANE AT TOP PLATE OVER SHEATHING,CAULK AT GYP. BD. BLOCKING W/ "V" NOTCH -VENTILATION AND BUG

STANDING SEAM METAL ROOF OVER WATER PROOFING UNDERLAYMENT 2x4 DOUGLAS FIR TONGUE -AND GROOVE BOARDS, EXPOSED, PTD,

1X8 FASCIA BOARD, W/ --2" CIRCULAR VENTS,(2) PER BAY

CONTINUOUS FLASHING W/ DRIP EDGE EXPOSED 2X DOUGLAS-FIR -RAFTERS (24" O.C.) TO MATCH 2X WOOD RAFTERS. REMOVE 1-1/2" FROM EXPOSED RAFTER TO ALLOW FOR 2x4 TONGUE AND GROOVE BOARDS TO BE FLUSH W/ STRUCTURAL RAFTERS. REFER TO STRUCTURE

2X WOOD BLOCKING W/ -COR-A-VENT SCREEN

WATER RESISTIVE BARRIER -OVER ½ SHEATHING, 4" TRIM BOARD W/ Z FLASHING -

WOOD FRENCH DOOR AS -SCHEDULED, INSTALL PER MFR. SPECS


DOOR SILL W/ METAL DRIP PAN FLASHING WOOD KICK BOARD WOOD DECK, BY-OWNER


SLOPE TO DRAIN -

COMPACT EXISTING SUB-GRADE


CONCRETE FOUNDATION, -REFER TO STRUCTURE

6 MIL. VISQUEEN MEMBRANE

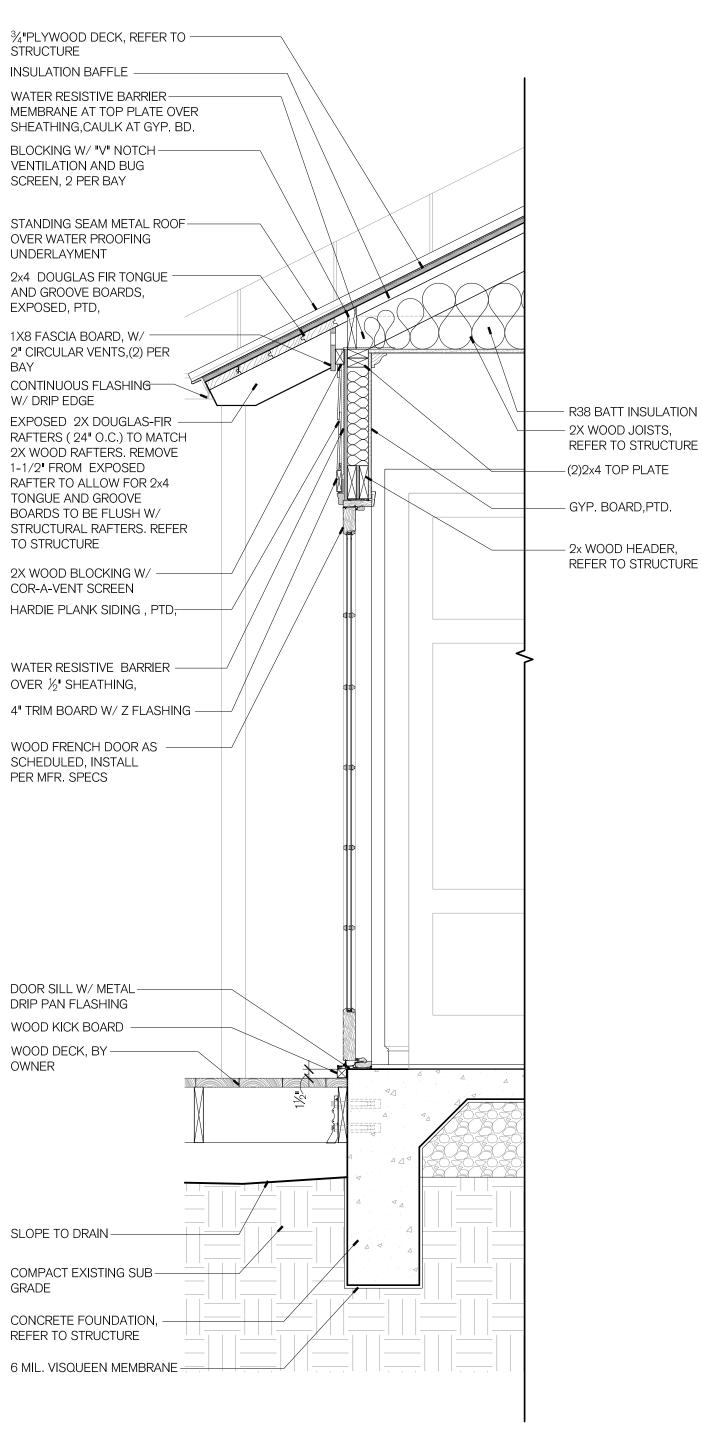

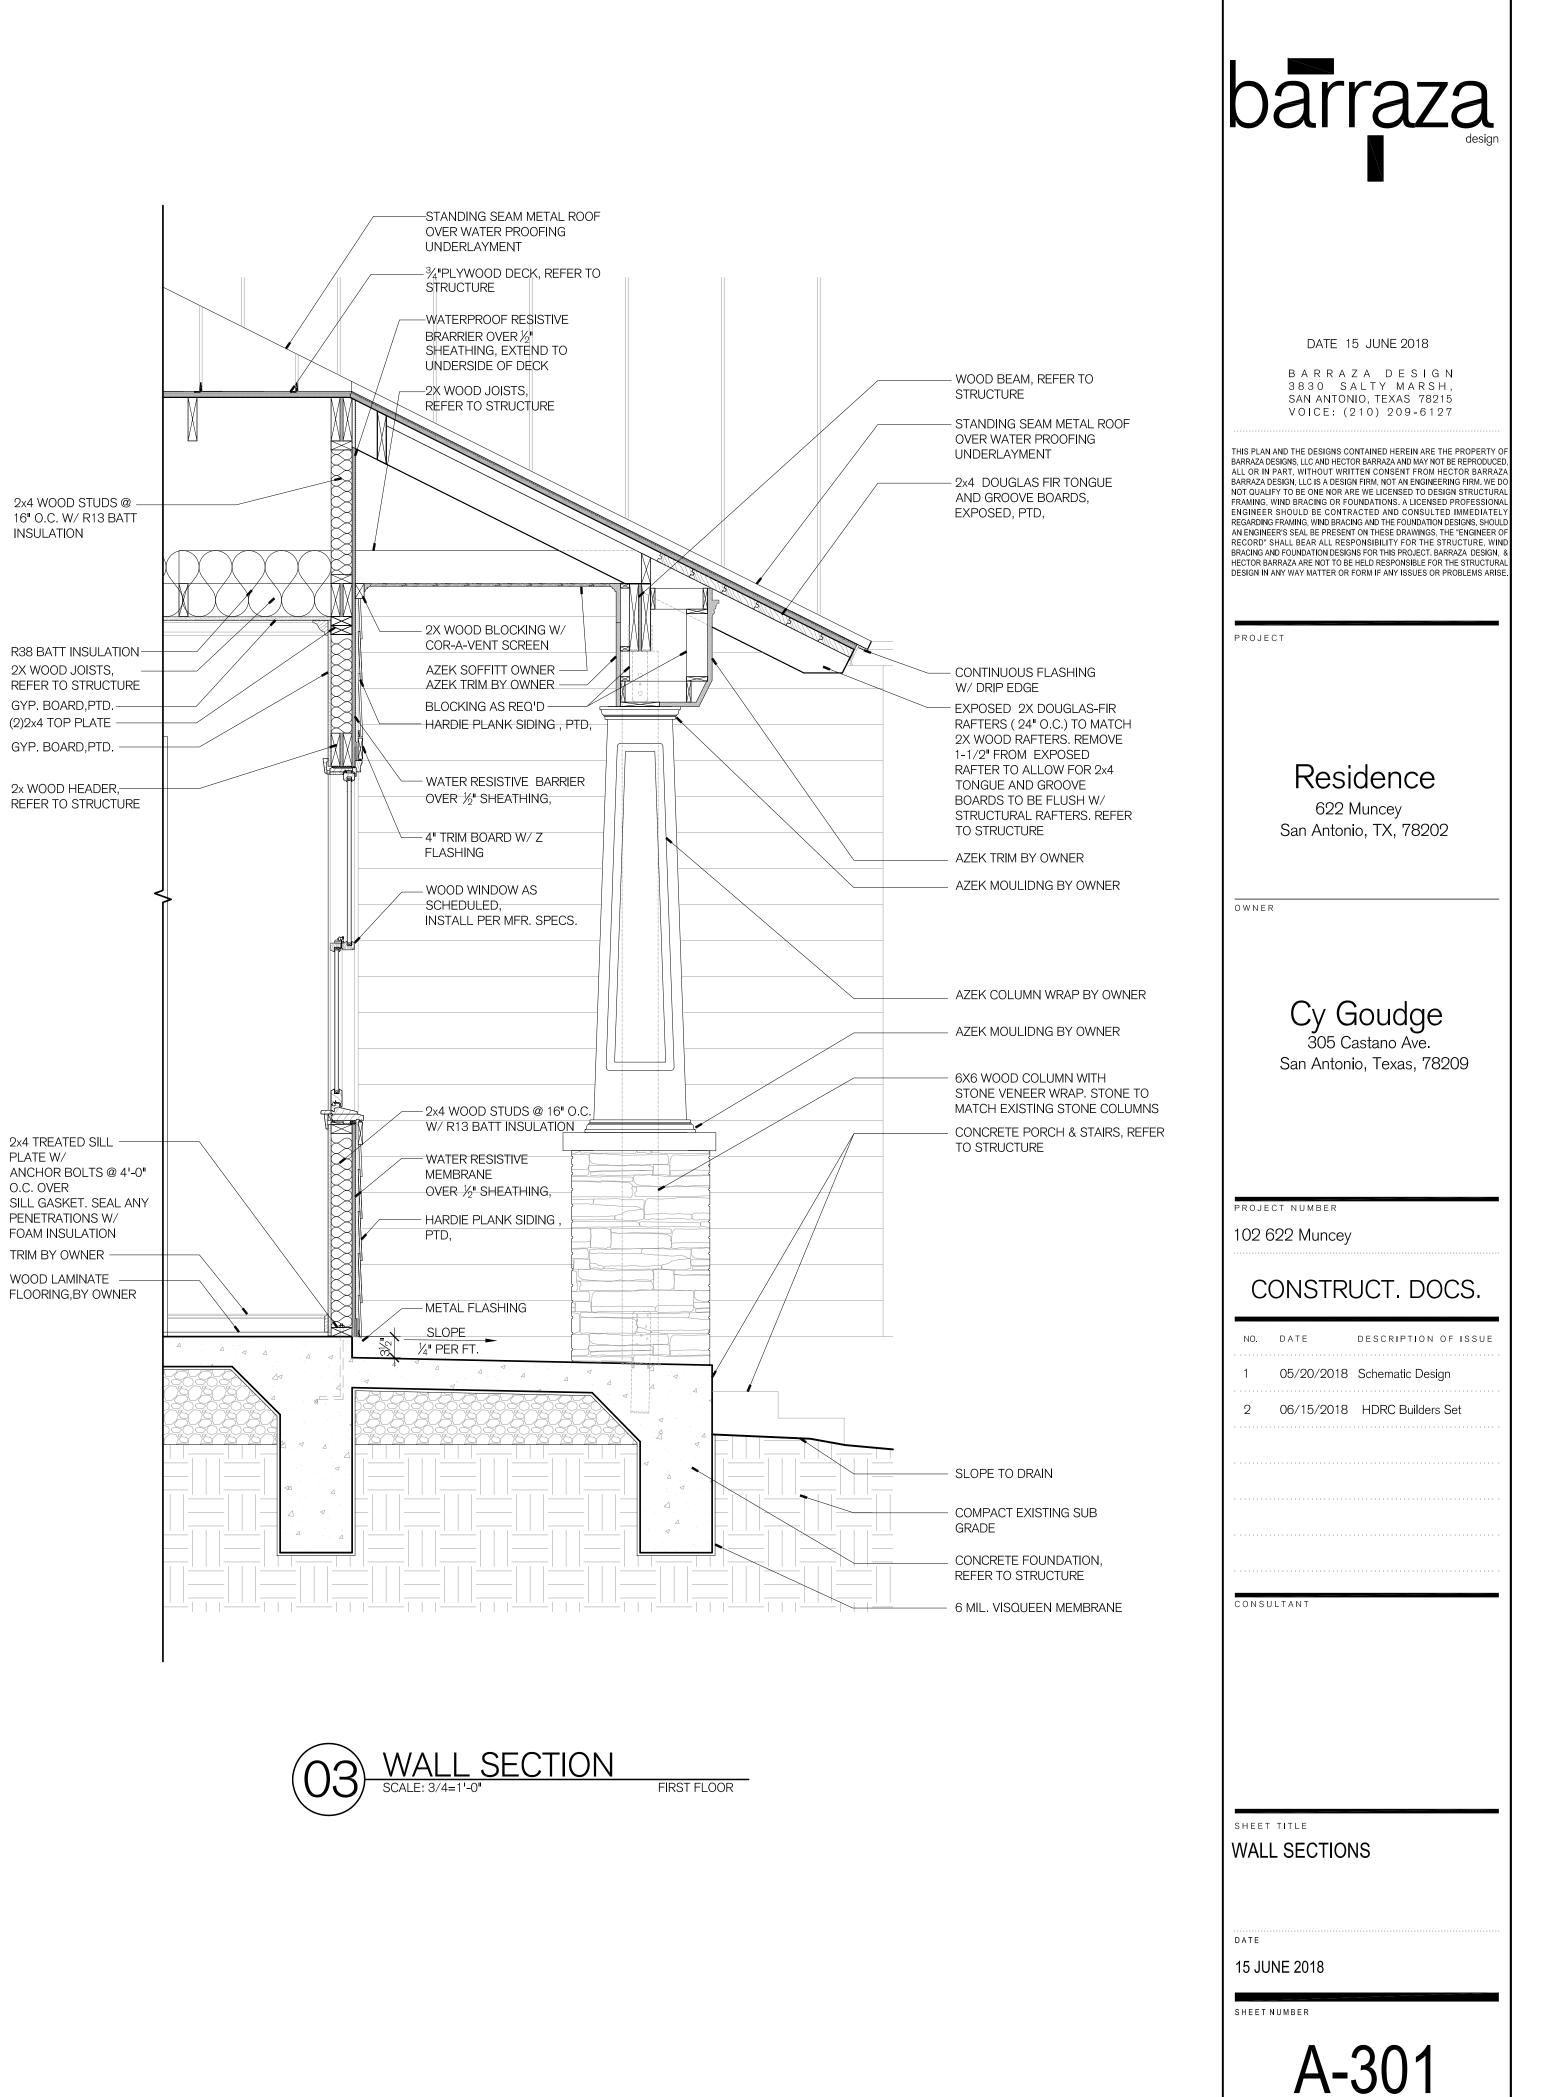





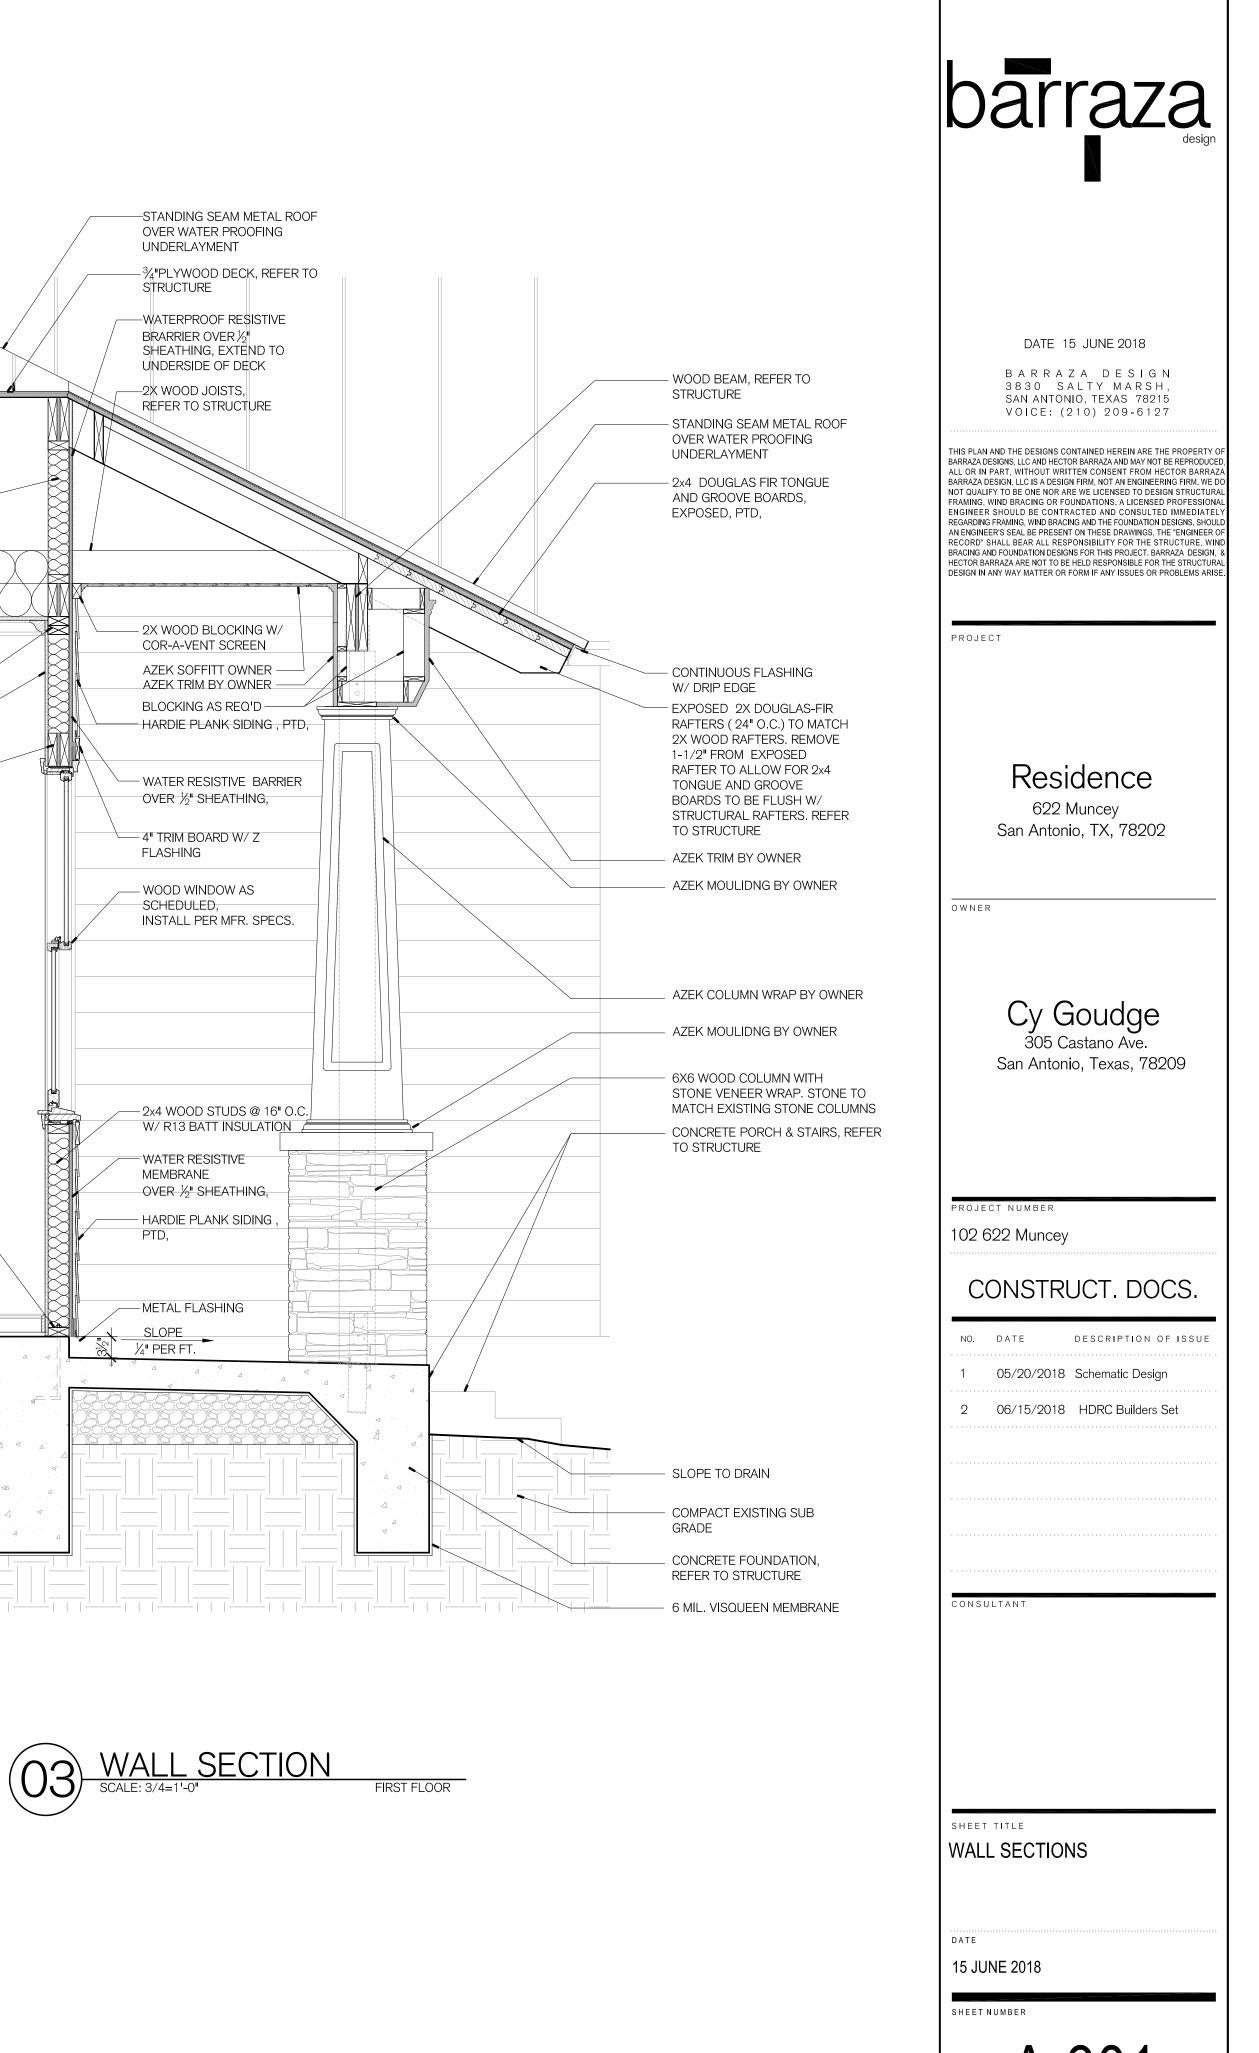



KEY NOTES:


- VENT HOOD BY OWNER
 REFRIGERATOR
- 3. 36" GAS COOK-TOP
- GRANITE TOP & BACKSPLASH
 DISHWASHER, BY OWNER
- PENDANT LIGHTS
 MICROWAVE, VERIFY DIMENSIONS
- OF CABINET WITH MFR. SPECS.
- FRAMED MIRROR
 FLOOR MOUNTED DUAL FLUSH TOILET
- 10. 36" APRON SINK, BY OWNER
- 42' HIGH BAR TOP
 SLIDING SHOWER DOOR (TEMPERED)

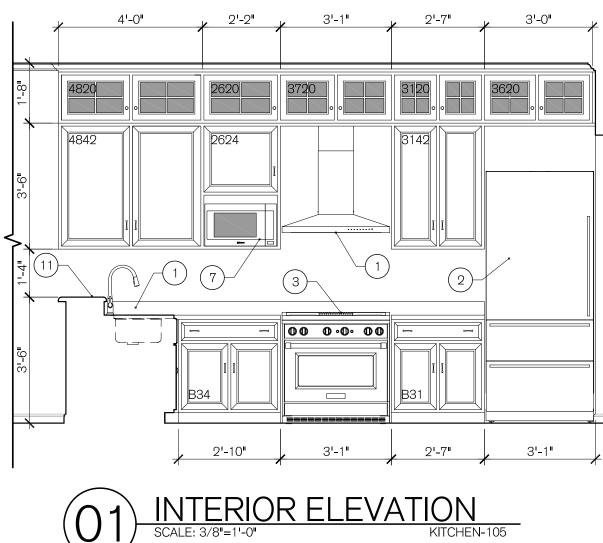


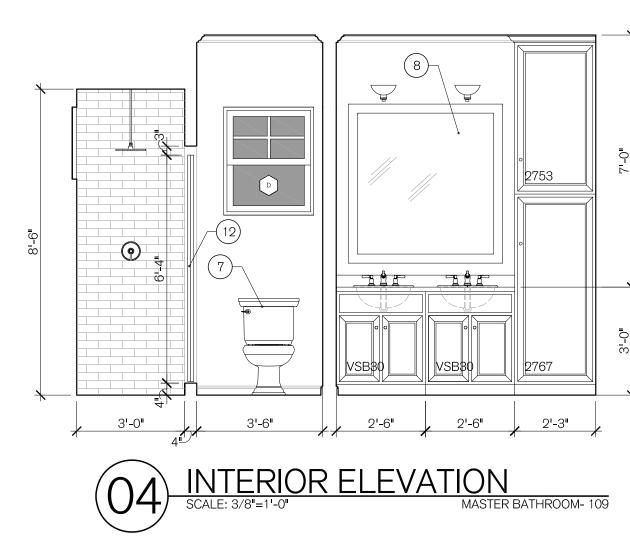




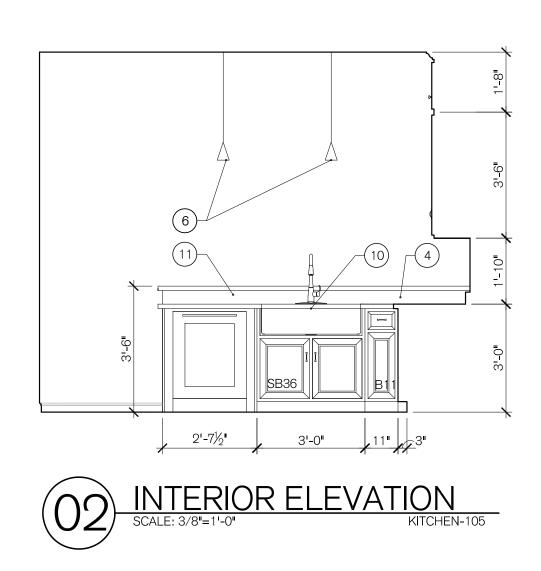

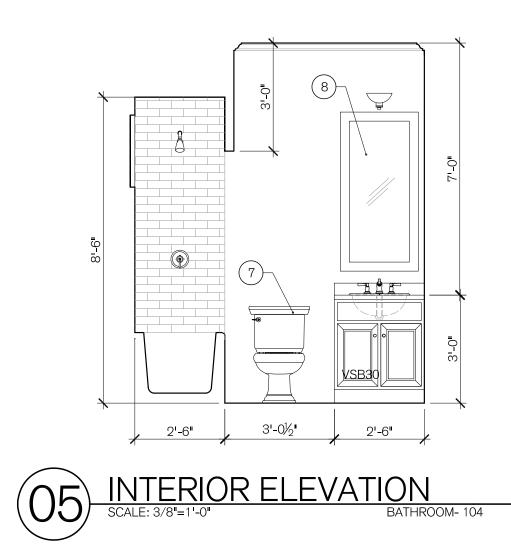

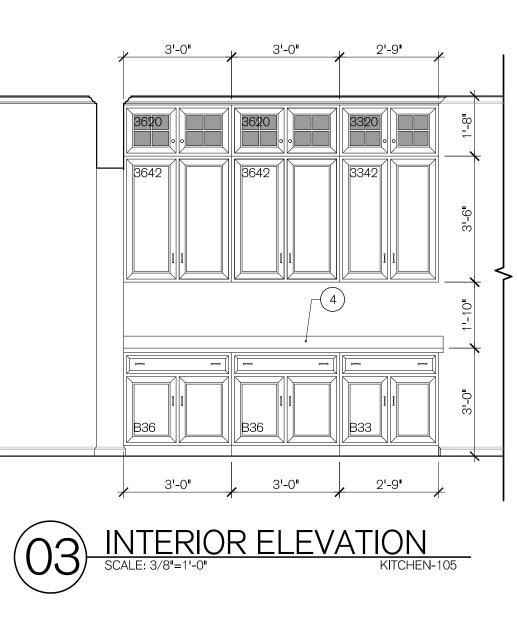

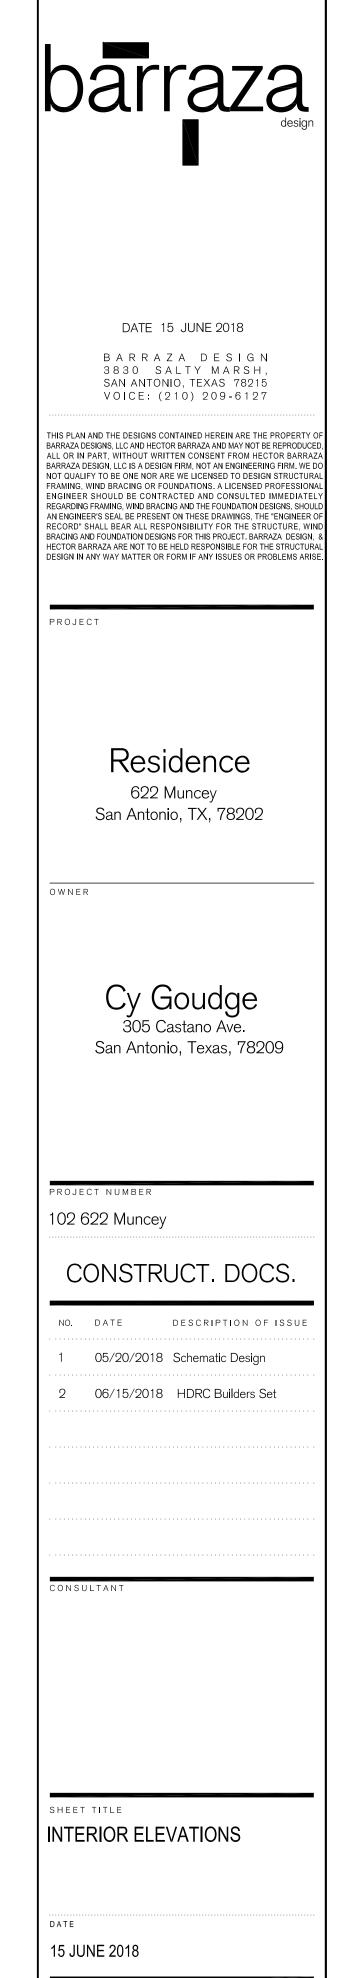

SHEET NUMBER

A-500

