HISTORIC AND DESIGN REVIEW COMMISSION January 02, 2019

HDRC CASE NO: 2018-633

ADDRESS: 424 N OLIVE ST

LEGAL DESCRIPTION: NCB 578 BLK B LOT 3

ZONING: RM-4, H

CITY COUNCIL DIST.: 2

DISTRICT: Dignowity Hill Historic District **APPLICANT:** Cy Goudge/JCG Homes, LLC

OWNER: JCG Homes, LLC

TYPE OF WORK: Construction of a 1 story residential structure

APPLICATION RECEIVED: December 06, 2018 **60-DAY REVIEW:** February 04, 2019

REQUEST:

The applicant is requesting a Certificate of Appropriateness for approval to construct a single story, single family residential structure on the vacant lot at 424 N Olive, located within the Dignowity Hill Historic District.

APPLICABLE CITATIONS:

Historic Design Guidelines, Chapter 4, Guidelines for New Construction

1. Building and Entrance Orientation

A. FAÇADE ORIENTATION

i. Setbacks—Align front facades of new buildings with front facades of adjacent buildings where a consistent setback has been established along the street frontage. Use the median setback of buildings along the street frontage where a variety of setbacks exist. Refer to UDC Article 3, Division 2. Base Zoning Districts for applicable setback requirements.

ii. Orientation—Orient the front façade of new buildings to be consistent with the predominant orientation of historic buildings along the street frontage.

B. ENTRANCES

i. Orientation—Orient primary building entrances, porches, and landings to be consistent with those historically found along the street frontage. Typically, historic building entrances are oriented towards the primary street.

2. Building Massing and Form

A. SCALE AND MASS

- i. Similar height and scale—Design new construction so that its height and overall scale are consistent with nearby historic buildings. In residential districts, the height and scale of new construction should not exceed that of the majority of historic buildings by more than one-story. In commercial districts, building height shall conform to the established pattern. If there is no more than a 50% variation in the scale of buildings on the adjacent block faces, then the height of the new building shall not exceed the tallest building on the adjacent block face by more than 10%.
- *ii. Transitions*—Utilize step-downs in building height, wall-plane offsets, and other variations in building massing to provide a visual transition when the height of new construction exceeds that of adjacent historic buildings by more than one-half story.
- *iii. Foundation and floor heights*—Align foundation and floor-to-floor heights (including porches and balconies) within one foot of floor-to-floor heights on adjacent historic structures.

B. ROOF FORM

i. Similar roof forms—Incorporate roof forms—pitch, overhangs, and orientation—that are consistent with those predominantly found on the block. Roof forms on residential building types are typically sloped, while roof forms on nonresidential

building types are more typically flat and screened by an ornamental parapet wall.

ii. Façade configuration—The primary façade of new commercial buildings should be in keeping with established patterns. Maintaining horizontal elements within adjacent cap, middle, and base precedents will establish a consistent

street wall through the alignment of horizontal parts. Avoid blank walls, particularly on elevations visible from the street. No new façade should exceed 40 linear feet without being penetrated by windows, entryways, or other defined bays.

D. LOT COVERAGE

i. Building to lot ratio—New construction should be consistent with adjacent historic buildings in terms of the building to lot ratio. Limit the building footprint for new construction to no more than 50 percent of the total lot area, unless adjacent historic buildings establish a precedent with a greater building to lot ratio.

3. Materials and Textures

A. NEW MATERIALS

- i. *Complementary materials*—Use materials that complement the type, color, and texture of materials traditionally found in the district. Materials should not be so dissimilar as to distract from the historic interpretation of the district. For example, corrugated metal siding would not be appropriate for a new structure in a district comprised of homes with wood siding.
- *ii. Alternative use of traditional materials*—Consider using traditional materials, such as wood siding, in a new way to provide visual interest in new construction while still ensuring compatibility.
- iii. Roof materials—Select roof materials that are similar in terms of form, color, and texture to traditionally used in the district.
- *iv. Metal roofs*—Construct new metal roofs in a similar fashion as historic metal roofs. Refer to the Guidelines for Alterations and Maintenance section for additional specifications regarding metal roofs.
- v. Imitation or synthetic materials—Do not use vinyl siding, plastic, or corrugated metal sheeting. Contemporary materials not traditionally used in the district, such as brick or simulated stone veneer and Hardie Board or other fiberboard siding, may be appropriate for new construction in some locations as long as new materials are visually similar to the traditional material in dimension, finish, and texture. EIFS is not recommended as a substitute for actual stucco.

4. Architectural Details

A. GENERAL

- *i. Historic context*—Design new buildings to reflect their time while respecting the historic context. While new construction should not attempt to mirror or replicate historic features, new structures should not be so dissimilar as to distract from or diminish the historic interpretation of the district.
- *ii.* Architectural details—Incorporate architectural details that are in keeping with the predominant architectural style along the block face or within the district when one exists. Details should be simple in design and should complement, but not visually compete with, the character of the adjacent historic structures or other historic structures within the district. Architectural details that are more ornate or elaborate than those found within the district are inappropriate.
- *iii.* Contemporary interpretations—Consider integrating contemporary interpretations of traditional designs and details for new construction. Use of contemporary window moldings and door surroundings, for example, can provide visual interest while helping to convey the fact that the structure is new. Modern materials should be implemented in a way that does not distract from the historic structure.

5. Garages and Outbuildings

A. DESIGN AND CHARACTER

- v. Garage doors—Incorporate garage doors with similar proportions and materials as those traditionally found in the district.
- 6. Mechanical Equipment and Roof Appurtenances

A. LOCATION AND SITING

- *i. Visibility*—Do not locate utility boxes, air conditioners, rooftop mechanical equipment, skylights, satellite dishes, and other roof appurtenances on primary facades, front-facing roof slopes, in front yards, or in other locations that are clearly visible from the public right-of-way.
- ii. Service Areas—Locate service areas towards the rear of the site to minimize visibility from the public right-of-way.

B. SCREENING

- *i. Building-mounted equipment*—Paint devices mounted on secondary facades and other exposed hardware, frames, and piping to match the color scheme of the primary structure or screen them with landscaping.
- *ii. Freestanding equipment*—Screen service areas, air conditioning units, and other mechanical equipment from public view using a fence, hedge, or other enclosure.
- *iii. Roof-mounted equipment*—Screen and set back devices mounted on the roof to avoid view from public right-of-way. Historic Design Guidelines, Chapter 5, Guidelines for Site Elements

B. NEW FENCES AND WALLS

- i. Design—New fences and walls should appear similar to those used historically within the district in terms of their scale, transparency, and character. Design of fence should respond to the design and materials of the house or main structure. ii. Location—Avoid installing a fence or wall in a location where one did not historically exist, particularly within the front yard. The appropriateness of a front yard fence or wall is dependent on conditions within a specific historic district. New front yard fences or wall should not be introduced within historic districts that have not historically had them. iii. Height—Limit the height of new fences and walls within the front yard to a maximum of four feet. The appropriateness of a front yard fence is dependent on conditions within a specific historic district. New front yard fences should not be introduced within historic districts that have not historically had them. If a taller fence or wall existed historically, additional height may be considered. The height of a new retaining wall should not exceed the height of the slope it retains.
- *iv. Prohibited materials*—Do not use exposed concrete masonry units (CMU), Keystone or similar interlocking retaining wall systems, concrete block, vinyl fencing, or chain link fencing.
- v. Appropriate materials—Construct new fences or walls of materials similar to fence materials historically used in the district. Select materials that are similar in scale, texture, color, and form as those historically used in the district, and that are compatible with the main structure. Screening incompatible uses—Review alternative fence heights and materials for appropriateness where residential properties are adjacent to commercial or other potentially incompatible uses.

3. Landscape Design

A. PLANTINGS

- i. Historic Gardens— Maintain front yard gardens when appropriate within a specific historic district.
- *ii. Historic Lawns*—Do not fully remove and replace traditional lawn areas with impervious hardscape. Limit the removal of lawn areas to mulched planting beds or pervious hardscapes in locations where they would historically be found, such as along fences, walkways, or drives. Low-growing plantings should be used in historic lawn areas; invasive or large-scale species should be avoided. Historic lawn areas should never be reduced by more than 50%.
- *iii.* Native xeric plant materials—Select native and/or xeric plants that thrive in local conditions and reduce watering usage. See UDC Appendix E: San Antonio Recommended Plant List—All Suited to Xeriscape Planting Methods, for a list of appropriate materials and planting methods. Select plant materials with a similar character, growth habit, and light requirements as those being replaced.
- *iv. Plant palettes*—If a varied plant palette is used, incorporate species of taller heights, such informal elements should be restrained to small areas of the front yard or to the rear or side yard so as not to obstruct views of or otherwise distract from the historic structure.
- v. Maintenance—Maintain existing landscape features. Do not introduce landscape elements that will obscure the historic structure or are located as to retain moisture on walls or foundations (e.g., dense foundation plantings or vines) or as to cause damage.

B. ROCKS OR HARDSCAPE

- *i. Impervious surfaces* —Do not introduce large pavers, asphalt, or other impervious surfaces where they were not historically located.
- *ii. Pervious and semi-pervious surfaces*—New pervious hardscapes should be limited to areas that are not highly visible, and should not be used as wholesale replacement for plantings. If used, small plantings should be incorporated into the design.
- *iii.* Rock mulch and gravel Do not use rock mulch or gravel as a wholesale replacement for lawn area. If used, plantings should be incorporated into the design.

D TREES

- *i. Preservation*—Preserve and protect from damage existing mature trees and heritage trees. See UDC Section 35-523 (Tree Preservation) for specific requirements.
- *ii.* New Trees Select new trees based on site conditions. Avoid planting new trees in locations that could potentially cause damage to a historic structure or other historic elements. Species selection and planting procedure should be done in accordance with guidance from the City Arborist.
- 5. Sidewalks, Walkways, Driveways, and Curbing

A SIDEWALKS AND WALKWAYS

- *i. Maintenance*—Repair minor cracking, settling, or jamming along sidewalks to prevent uneven surfaces. Retain and repair historic sidewalk and walkway paving materials—often brick or concrete—in place.
- *ii. Replacement materials*—Replace those portions of sidewalks or walkways that are deteriorated beyond repair. Every effort should be made to match existing sidewalk color and material.
- *iii. Width and alignment*—Follow the historic alignment, configuration, and width of sidewalks and walkways. Alter the historic width or alignment only where absolutely necessary to accommodate the preservation of a significant tree.
- *iv. Stamped concrete*—Preserve stamped street names, business insignias, or other historic elements of sidewalks and walkways when replacement is necessary.
- v. ADA compliance—Limit removal of historic sidewalk materials to the immediate intersection when ramps are added to address ADA requirements.

B. DRIVEWAYS

- *i. Driveway configuration*—Retain and repair in place historic driveway configurations, such as ribbon drives. Incorporate a similar driveway configuration—materials, width, and design—to that historically found on the site. Historic driveways are typically no wider than 10 feet. Pervious paving surfaces may be considered where replacement is necessary to increase stormwater infiltration.
- *ii. Curb cuts and ramps*—Maintain the width and configuration of original curb cuts when replacing historic driveways. Avoid introducing new curb cuts where not historically found.

7. Off-Street Parking

A. LOCATION

- i. Preferred location—Place parking areas for non-residential and mixed-use structures at the rear of the site, behind primary structures to hide them from the public right-of-way. On corner lots, place parking areas behind the primary structure and set them back as far as possible from the side streets. Parking areas to the side of the primary structure are acceptable when location behind the structure is not feasible. See UDC Section 35-310 for district-specific standards. ii. Front—Do not add off-street parking areas within the front yard setback as to not disrupt the continuity of the streetscape.
- *iii.* Access—Design off-street parking areas to be accessed from alleys or secondary streets rather than from principal streets whenever possible.

B. DESIGN

- *i. Screening*—Screen off-street parking areas with a landscape buffer, wall, or ornamental fence two to four feet high—or a combination of these methods. Landscape buffers are preferred due to their ability to absorb carbon dioxide. See UDC Section 35-510 for buffer requirements.
- *ii. Materials*—Use permeable parking surfaces when possible to reduce run-off and flooding. See UDC Section 35-526(j) for specific standards.
- *iii. Parking structures*—Design new parking structures to be similar in scale, materials, and rhythm of the surrounding historic district when new parking structures are necessary.

FINDINGS:

- a. The applicant is requesting a Certificate of Appropriateness for approval to construct a single story, single family residential structure on the vacant lot at 424 N Olive, located within the Dignowity Hill Historic District.
- b. SETBACKS & ORIENTATION According to the Guidelines for New Construction, the front facades of new buildings are to align with front facades of adjacent buildings where a consistent setback has been established along the street frontage. Additionally, the orientation of new construction should be consistent with the historic examples found on the block. The applicant has proposed a front yard setback of 12' 6" from the front property line. A measurement has not been provided by the applicant to the street. The two historic structures to the immediate north feature setbacks from the street of approximately thirty-five feet. The two historic structures to the immediate south feature setbacks of approximately twenty-five feet. Staff finds that the proposed new construction should feature a setback that is greater than those found historically on the block.
- c. ENTRANCES According to the Guidelines for New Construction 1.B.i, primary building entrance should be oriented towards the primary street. The applicant's proposed entrance orientation is consistent with the Guidelines.
- d. SCALE & MASS Per the Guidelines for New Construction 2.A.i., a height and massing similar to historic structures in the vicinity of the proposed new construction should be used. In residential districts, the height and scale of new construction should not exceed that of the majority of historic buildings by more than one-story. This block of N Olive features one story historic structures. The proposed new construction is consistent with the Guidelines.
- e. FOUNDATION & FLOOR HEIGHTS According to the Guidelines for New Construction 2.A.iii., foundation and floor heights should be aligned within one (1) foot of neighboring structure's foundation and floor heights. The applicant has proposed a foundation height of 1' 6". The historic structures on this block feature foundation heights of one to three feet in height. The proposed foundation height is consistent with the Guidelines.
- f. ROOF FORM The applicant has proposed both hipped and gabled roofs. The proposed roof forms are found predominantly throughout the Dignowity Hill Historic District. The proposed roof forms are consistent with the Guidelines.
- g. WINDOW & DOOR OPENINGS Per the Guidelines for New Construction 2.C.i., window and door openings with similar proportions of wall to window space as typical with nearby historic facades should be incorporated into new construction. Generally, the applicant has proposed window and door openings that feature similar proportions to those found historically within the Dignowity Hill Historic District.
- h. MATERIALS The applicant has proposed materials that include an asphalt single roof, Hardie siding with a smooth finish and four (4) inch exposure, wood columns. Staff finds the proposed materials to be appropriate.
- i. WINDOW MATERIALS The applicant has proposed to install wood windows. Windows must feature meeting rails that are no taller than 1.25" and stiles no wider than 2.25". White manufacturer's color is not allowed, and color selection must be presented to staff. There should be a minimum of two inches in depth between the front face of the window trim and the front face of the top window sash. This must be accomplished by recessing the window sufficiently within the opening or with the installation of additional window trim to add thickness. Window trim must feature traditional dimensions and an architecturally appropriate sill detail. Window track components must be painted to match the window trim or concealed by a wood window screen set within the opening. Grouped windows should be separated by a wood mullion to feature approximately six (6) inches in width. Windows featuring false divided lites are not appropriate.
- j. ARCHITECTURAL DETAILS The applicant has proposed new construction that features architectural details that are generally appropriate for the Dignowity Hill Historic District. The proposed new construction features many elements that are complementary to the Craftsman style. Grouped windows should be separated by mullions of six (6) inches in width.
- k. DRIVEWAY The applicant has proposed a driveway to be located on the north side of the proposed new construction to feature nine (9) feet in width. Staff finds the proposed driveway location and width to be appropriate.
- 1. WALKWAY The applicant has proposed to install a concrete paver walkway leading from the front porch to the sidewalk at the right of way. The applicant has proposed a width for this walkway of approximately three (3) feet. Generally, staff finds the proposed walkway to be appropriate.
- m. FENCING The applicant has noted the installation of front yard fencing; however, has not provided a fencing detail at this time. Staff finds the installation of front yard fencing to be appropriate on this block; however, the proposed fencing should not exceed four feet in height and should turn at the driveway as opposed to spanning the

width of the driveway at the public right of way.

RECOMMENDATION:

Staff recommends approval based on findings a through m with the following stipulations:

- i. That the applicant increase the proposed setback to where it will be greater than that of both neighboring historic structures. This should be demonstrated to staff prior to receiving a Certificate of Appropriateness.
- ii. That the proposed grouped widows are separated by wood mullions featuring approximately six (6) inches in width.
- iii. That the proposed driveway gate be located at or behind the front façade of the house and that the proposed fence not exceed four feet in height. A fencing detail should be submitted to staff prior to the issuance of a Certificate of Appropriateness.
- iv. Windows must feature meeting rails that are no taller than 1.25" and stiles no wider than 2.25". White manufacturer's color is not allowed, and color selection must be presented to staff. There should be a minimum of two inches in depth between the front face of the window trim and the front face of the top window sash. This must be accomplished by recessing the window sufficiently within the opening or with the installation of additional window trim to add thickness. Window trim must feature traditional dimensions and an architecturally appropriate sill detail. Window track components must be painted to match the window trim or concealed by a wood window screen set within the opening. Grouped windows should be separated by a wood mullion to feature approximately six (6) inches in width. Windows featuring false divided lites are not appropriate.

A foundation formwork inspection must be performed prior to the pouring of foundation concrete to confirm that the approved setback and foundation heights are being constructed.

CASE MANAGER:

Edward Hall





Flex Viewer

Powered by ArcGIS Server

Printed:Dec 19, 2018

The City of San Antonio does not guarantee the accuracy, adequacy, completeness or usefulness of any information. The City does not warrant the completeness, timeliness, or positional, thematic, and attribute accuracy of the GIS data. The GIS data, cartographic products, and associated applications are not legal representations of the depicted data. Information shown on these maps is derived from public records that are constantly undergoing revision. Under no circumstances should GIS-derived products be used for final design purposes. The City provides this information on an "as is" basis without warranty of any kind, express or implied, including but not limited to warranties of merchantability or fitness for a particular purpose, and assumes no responsibility for anyone's use of the information.



GENERAL NOTES:

- THIS BUILDERS SET(PART OF THE CONTRACT DOCUMENTS) IS PRESENTED TO INCLUDE DRAWINGS ON 24X36 SHEETS.
- 2. ELECTRICAL AND PLUMBING LINES SHALL RUN CONCEALED AND FRAMING SHALL BE OF ADEQUATE DIMENSIONS TO ACCOMPLISH THIS RESULT WITHOUT CHANGES IN THE WALL PLANE OR CEILING PLANE.
- 3. WHEN REFERENCE IS MADE TO A MATERIAL SYSTEM, ALL PARTS AND MATERIALS PERTINENT TO THE MANUFACTURER'S SYSTEM SHALL BE FURNISHED AND INSTALLED ACCORDING TO THE MANUFACTURER'S INSTRUCTIONS AND SPECIFICATIONS.
- ALL INFORMATION ON EXISTING CONDITIONS WAS SUPPLIED TO THE DESIGNER BY THE OWNER, CONTRACTOR IS REQUESTED TO VERIFY, ON-SITE, ALL DIMENSIONS & CONDITIONS BEFORE STARTING CONSTRUCTION. REPORT ANY DISCREPANCIES IMMEDIATELY TO THE DESIGNER PRIOR TO THE COMMENCING OF CONSTRUCTION.
- 5. FINISHES AND TEXTURES SELECTED BY OWNER.
- 6. REPAIR ANY DAMAGED AREAS PRIOR TO APPLYING FINISHES
- 7. THE CONTRACT DOCUMENTS ARE COMPLIMENTARY, AND WHAT IS REQUIRED BY ONE SHALL BE AS BINDING AS IF REQUIRED BY ALL, ALL CONTRACT DOCUMENTS AND ENGINEERING DRAWINGS ARE TO BE USED TOGETHER. GENERAL CONTRACTOR AND SUBCONTRACTORS ARE RESPONSIBLE TO REVIEW COMPLETE SETS OF DOCUMENTS AND REPORT ANY DISCREPENCIES TO THE DESIGNER PRIOR TO THE START OF CONSTRUCTION.
- CONTRACTOR SHALL MAINTAIN A NEAT PREMISE AND SHALL THOUROUGHLY CLEAN ALL FINISHED SURFACES INSIDE AND OUTSIDE OF THE PROJECT.
- 9. ALL SUBCONTRACTORS ARE RESPONSIBLE FOR A COMPLETE JOB WITHIN THEIR DISCIPLINES AND SHALL NOTIFY THE CONTRACTOR AND THE OWNER OR HIS AUTHORIZED AGENT OF ANY NORMALLY REQUIRED ITEMS NOT SPECIFICALLY IDENTIFIED IN THE DRAWINGS.
- 10. NUMERICAL DIMENSIONS SHALL TAKE PRIORITY OVER SCALED DIMENSIONS.
- 11. ALL WORK AND MATERIALS ARE TO COMPLY IN EVERY RESPECT WITH THE LATEST REQUIREMENTS OF ALL APPLICABLE CITY, COUNTY AND STATE CODES, LOCAL REGULATIONS AND THE DIRECTION OF THE BUILDING INSPECTOR FOR SUCH BUILDING LAWS, REGULATION AND DIRECTIONS ARE TO BE CONSIDERED AS PART OF THESE PLANS.
- 12. FOR ANY ITEM IDENTIFIED IN THE CONTRACT DOCUMENTS THAT IS REASONABLY INFERABLE AS A COMPONENT IN A SYSTEM AND REQUIRED FOR THE PERFORMANCE OF THAT SYSTEM, THE GENERAL CONTRACTOR SHALL INCLUDE ALL OTHER COMPONENTS IN THE WORK WHICH ARE NECCESARY FOR THE COMPLETION AND FULL OPERATIONAL PERFORMANCE OF THAT SYSTEM.

- 13. THE CONTRACT DOCUMENTS INDICATE THE GENERAL DESIGN INTENT, BUT DO NOT NECESSARILY DESCRIBE ALL WORK REQUIRED FOR FULL PERFORMANCE AND COMPLETION. THE CONTRACTOR SHALL PROVIDE ALL ITEMS REQUIRED FOR THE PROPER EXECUTION AND COMPLETION OF THE WORK.
- 14. THE GENERAL CONTRACTOR SHALL VERIFY IN THE FIELD AND COORDINATE BETWEEN THE TRADES, ALL CONDITIONS BOTH NEW AND EXISTING WHICH AFFECT WORK TO BE DONE OR RELEVANT THERETO, INCLUDING BUT NOT LIMITED TO, PROPERTY LINE DIMENSIONS, SETBACKS, EASEMENTS ,RESTRICTIONS, EXACT LOCATIONS OF ALL CONSTRUCTION, EXISTING AND NEW, EXISTENCE AND LOCATIONS OF ASBESTOS OR OTHER UNKNOWN TOXIC MATERIALS, DRIVEWAYS, WALKS, APRONS, UTILITIES, GRADES, AND DRAINAGE. THE CONTRACTOR IS RESPONSIBLE FOR THE DISCOVERY OF ASBESTOS AND OTHER REGULATED TOXIC MATERIALS AND SHALL BEAR ADMINISTRATIVE RESPONSIBILITY FOR CONFORMANCE TO FEDERAL, STATE, AND LOCAL JURISDICTIONAL REQUIREMENTS REGARDING THE DISPOSITION OF HAZARDOUS MATERIALS. SHOULD ANY QUESTIONS ARISE OR DISCREPENCIES ON THE DRAWINGS BE NOTED PRIOR TO BEGINNING OF CONSTRUCTION OR DURING ANY PHASE OF CONSTRUCTION, CONTRACTOR SHALL IMMEDIATELY NOTIFY THE DESIGNER FOR REVIEW AND CLARIFICATION BEFORE
- CONTRACTOR SHALL OBTAIN AND BE RESPONSIBLE FOR ALL FEES AND PERMITS REQUIRED AND ASSOCIATED WITH ALL PHASES OF THE WORK AND WITHIN SCOPE OF THE CONTRACT DOCUMENTS INCLUDING BUT NOT LIMITED TO; BUILDING PERMIT FEES, MEP FEES, WATER FEES, SEWER FEES, DRIVEWAY FEES, AND SIDEWALK FEES. THE LOCATION OF UTILITIES SHOWN ON THE SITE PLANS ARE BASED ON INFORMATION AVAILABLE. CONTRACTOR SHALL VERIFY THE EXACT LOCATION OF ALL UTILITIES BEFORE STARTING CONSTRUCTION.

PROCEEDING WITH THAT PORTION OF THE WORK OR ANY PART

- DESIGN AND CONSTRUCTION PROCESSES TO COMPLY WITH LOCAL, HOA, AND LOCAL AND STATE RESIDENTIAL BUILDING CODE REQUIREMENTS
- 17. ALL WOOD FRAMING TO BE TREATED.

RELATED TO THERETO.

- 18. ALL WOOD BLOCKING TO BE FIRE RETARDANT.
- 19. REFER TO ADDITIONAL NOTES BY STRUCTURAL AND MEP DISCIPLINES. WHERE VARIOUS DISCIPLINES INDICATE WORK FOR DIFFERENT DISCIPLINES (FOR EXAMPLE, MECHANICAL WORK WHICH WOULD REQUIRE STRUCTURAL MODIFICATIONS), THE GENERAL CONTRACTOR IS TO NOTIFY THE DESIGNER PRIOR TO COMMENCING THE WORK.
- 20. CONTRACTOR SHALL REPORT IMMEDIATELY, TO DESIGNER, (IN WRITTING) ANY EXISTING CONDITIONS (EG;ROT,TERMITES, ETC.) THAT MAY AFFECT PERFORMANCE OF THE EXISTING AND NEW STRUCTURES.

- 21, ALL WALLBOARD SHALL BE 5/8 THICK AND BE TAPED, FLOATED ,TEXTURED AND FINISHED ACCORDING TO FINISH SCHEDULES. USE TYPE "X" WALL BOARD ON GARAGE WALLS AND CEILINGS. USE HARDI-BACKER BOARD ON ALL PLUMBING WALLS TO BE
- 22. CONTRACTOR SHALL BE HELD RESPONSIBLE FOR THE EXECUTION OF THE PROJECT IN A COMPLETE AND WORKMAN LIKE MANNER, CONFORMING TO THE BEST STANDARDS OF PRACTICE IN VARIOUS TRADES.
- 23. NO VEHICLE IS PERMITTED ON THE ADJACENT PROPERTY AND ANY DAMAGE DONE TO EXISTING DRIVES AND WALKS OR OTHER STRUCTURES WILL BE REPAIRED OR REPLACED AND CHARGED TO THE PERSON OR COMPANY RESPONSIBLE.
- 24. TRADE NAMES AND BRANDS NOTED ON THE CONTRACT DOCUMENTS ARE FOR QUALITY STANDARDS ONLY. SUBSTITUTIONS OF "EQUAL" PRODUCTS MAY BE MADE WITH THE OWNER'S PERMISSION, I,C,B,O,/N,E,R, SUBSTITIONS SHALL BE MADE ONLY WITH PRODUCTS WHICH HAVE CURRENTLY ACTIVE I.C.B.O/N.E.R. EVALUATION REPORTS, OR BE APPROVED AND LISTED BY OTHER NATIONALLY RECOGNIZED TEST AGENCIES.


APPLICABLE CODES:

2015 INTERNATIONAL BUILDING CODE 2015 INTERNATIONAL RESIDENTIAL CODE 2015 INTERNATIONAL MECHANICAL CODE 2015 INTERNATIONAL PLUMBING CODE 2015 INTERNATIONAL FUEL GAS CODE 2015 INTERNATIONAL FIRE CODE 2015 INTERNATIONAL CONSERVATION CODE 2014 NATIONAL ELECTRIC CODE

PROJECT INFORMATION:

LOCATION: 424 N. OLIVE STREET, SAN ANTONIO TX,78202 OCCUPANCY CLASSIFICATION: SINGLE FAMILY RESIDENTIAL

SQUARE FOOTAGE:

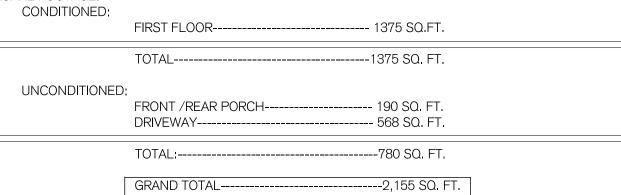

SHEET INDEX:

ARCHITECTURE:

A-100 COVER SHEET A-101 SITE PLAN

A-102 FLOOR PLAN A-103 RCP/ELECTRICAL PLAN A-104 ROOF PLAN


A-200 **EXTERIOR ELEVATIONS** A-201 **EXTERIOR ELEVATIONS**

A-300 BUILDING SECTIONS

A-301 WALL SECTIONS A-500 INTERIOR ELEVATIONS

DOOR & WINDOW SCHEDULE

LOCATION MAP:

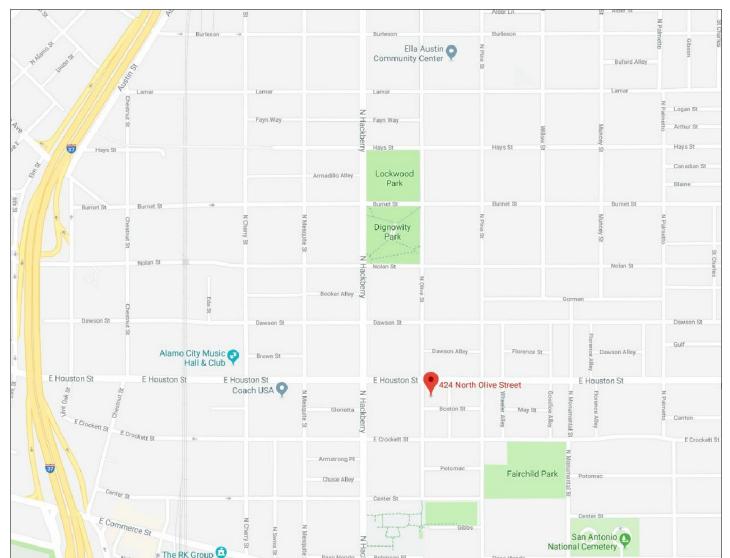

424 N. OLIVE STREET RESIDENCE


424 N. OLIVE STREET SAN ANTONIO TX, 78202

DESIGN TEAM:

BARRAZA DESIGNS, LLC 3830 SALTY MARSH SAN ANTONIO, TEXAS, 78245 210-209-6127

GRAPHIC LEGEND


TYP. WALL TYPES:

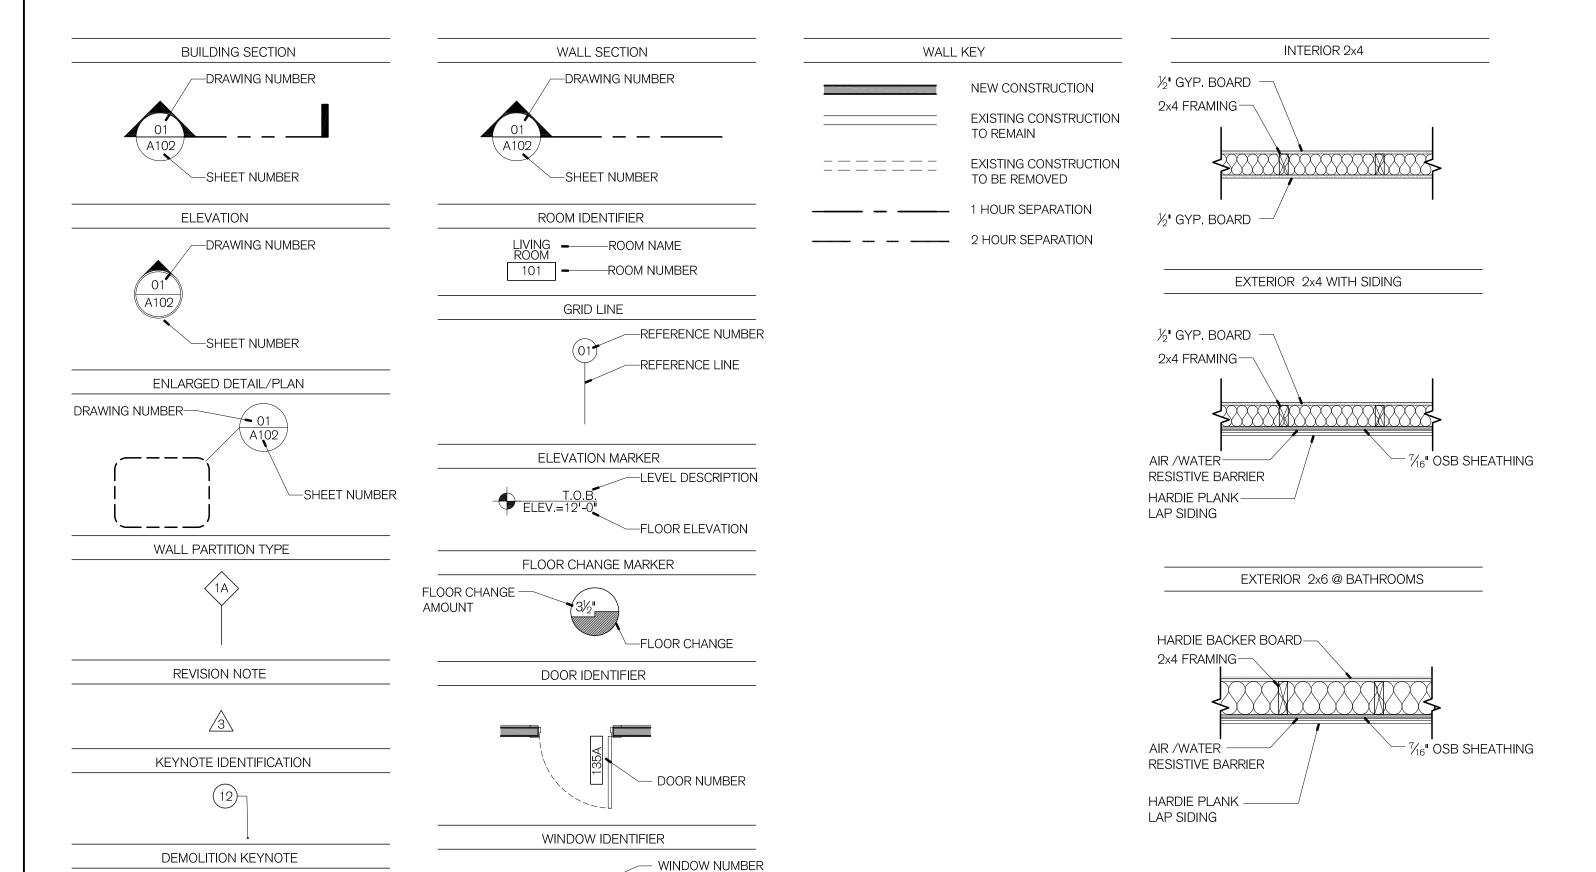

DATE 05 DECEMBER 2018 BARRAZA DESIGN 3830 SALTY MARSH, SAN ANTONIO, TEXAS 78215 VOICE: (210) 209-6127 HIS PLAN AND THE DESIGNS CONTAINED HEREIN ARE THE PROPER RRAZA DESIGNS, LLC AND HECTOR BARRAZA AND MAY NOT BE REPROI LL OR IN PART, WITHOUT WRITTEN CONSENT FROM HECTOR BAR RRAZA DESIGN, LLC IS A DESIGN FIRM, NOT AN ENGINEERING FIRM. WE NOT QUALIFY TO BE ONE NOR ARE WE LICENSED TO DESIGN STRUC RAMING, WIND BRACING OR FOUNDATIONS. A LICENSED PROFES NGINEER SHOULD BE CONTRACTED AND CONSULTED IMMEDIA EGARDING FRAMING, WIND BRACING AND THE FOUNDATION DESIGNS. SHO AN ENGINEER'S SEAL BE PRESENT ON THESE DRAWINGS, THE "ENGINEER RECORD" SHALL BEAR ALL RESPONSIBILITY FOR THE STRUCTURE, WI BRACING AND FOUNDATION DESIGNS FOR THIS PROJECT. BARRAZA DESIGN HECTOR BARRAZA ARE NOT TO BE HELD RESPONSIBLE FOR THE STRUCTU PROJECT Residence 424. N. Olive San Antonio, TX, 78202 San Antonio, Texas, 78209 104 424. N. Olive CONSTRUCT. DOCS. NO. DATE DESCRIPTION OF ISSUE 1 12/5/2018 COSA Permit Set SHEET TITLE **COVER SHEET**

05 DECEMBER 2018

SHEETNUMBER

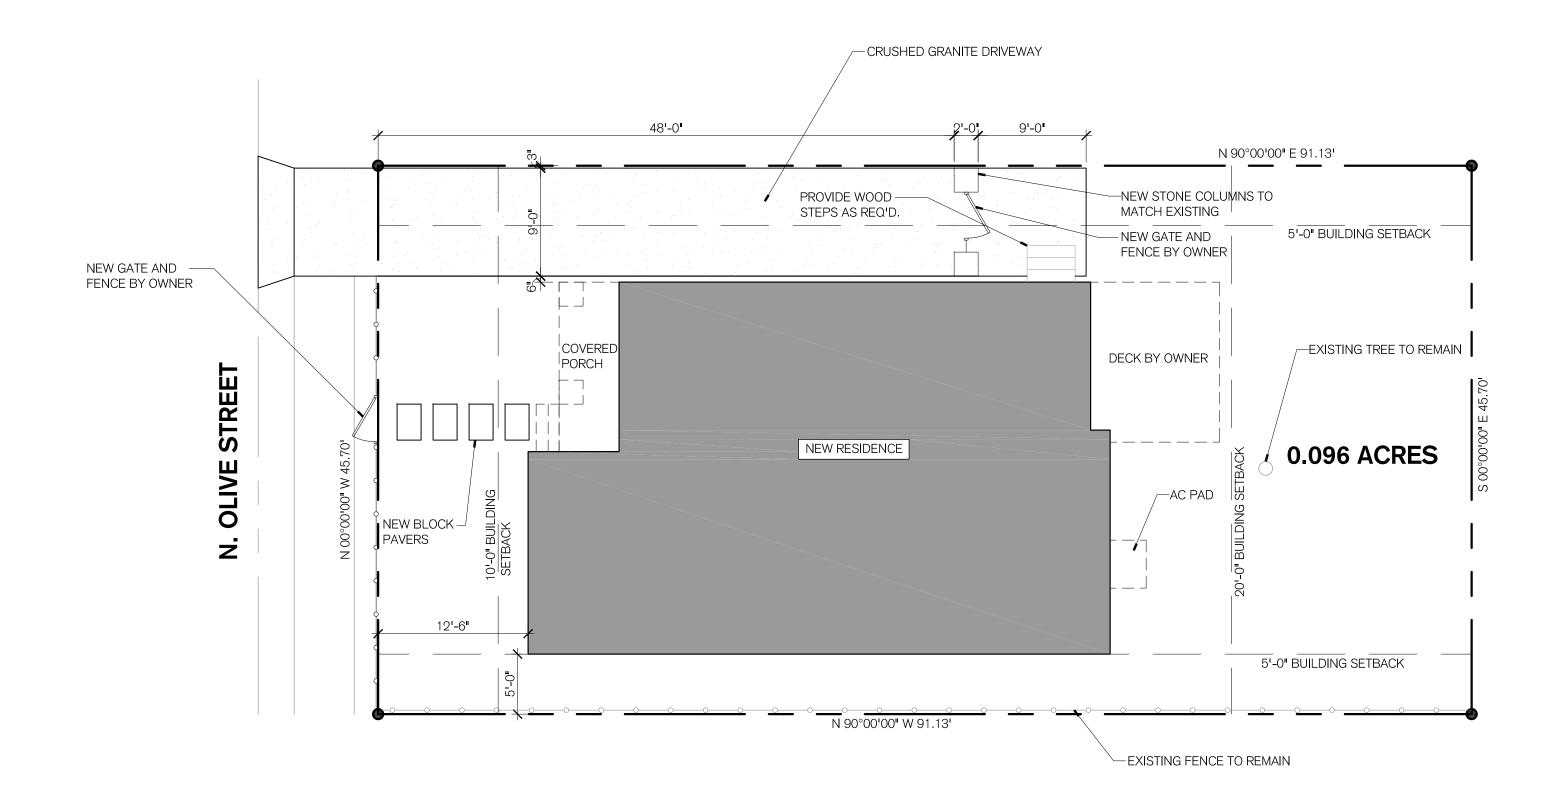






SITE NOTES:

- 1. NEW CONCRETE SIDEWALK TO CITY OF SAN ANTONIIO SPECIFICATIONS
- 2. PROVIDE CONTROL JOINTS AND EXPANSION JOINTS AS REQUIRED FOR CONCRETE DRIVEWAY AND SIDEWALK.
- 3. OBSERVE ALL CITY CODES & REGULATIONS FOR SETBACKS.
- 4. SEE SHEET A-104 FOR ROOF PLAN
- 5. SLOPE FINISHED GRADE AWAY FROM HOUSE FOR POSITIVE DRAINAGE. SWALE AS REQUIRED TO MEET NEIGHBORHOOD GUIDELINES
- 6. VERIFY EXISTING LOCATIONS OF WATER SPICKETS. CAP AND ABANDON ANY SPICKETS IN CONFLICT WITH FOUNDATION, SIDEWALKS, &
- 7. VERIFY EXISTING LOCATION OF TREES TO BE PRESERVED.
- 8. OWNER TO PROVIDE NEW FENCING AND GATES THAT ADHERE TO HOA AND DIGNOWITY HISTORIC DISTRICT REQUIREMENTS.

LEGAL DESCRIPTION:

ADRESS: 424 N. OLIVE STREET LOT: 3 BLOCK:4B NCB:578 SUBDIVISION: DIGNOWITY HILL, SAN ANTONIO , TEXAS, 78202

LEGEND:

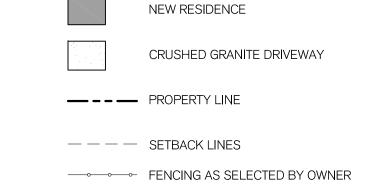

EXISTING TREE TO REMAIN



DATE 05 DECEMBER 2018

BARRAZA DESIGN 3830 SALTY MARSH, SAN ANTONIO, TEXAS 78215 VOICE: (210) 209-6127

THIS PLAN AND THE DESIGNS CONTAINED HEREIN ARE THE PROPERTY OF BARRAZA DESIGNS, LLC AND HECTOR BARRAZA AND MAY NOT BE REPRODUCED, ALL OR IN PART, WITHOUT WRITTEN CONSENT FROM HECTOR BARRAZA BARRAZA DESIGN, LLC IS A DESIGN FIRM, NOT AN ENGINEERING FIRM. WE DO NOT QUALIFY TO BE ONE NOR ARE WE LICENSED TO DESIGN STRUCTURAL FRAMING, WIND BRACING OR FOUNDATIONS. A LICENSED PROFESSIONAL ENGINEER SHOULD BE CONTRACTED AND CONSULTED IMMEDIATELY REGARDING FRAMING, WIND BRACING AND THE FOUNDATION DESIGNS. SHOULD AN ENGINEER'S SEAL BE PRESENT ON THESE DRAWINGS, THE "ENGINEER OF RECORD" SHALL BEAR ALL RESPONSIBILITY FOR THE STRUCTURE, WIND BRACING AND FOUNDATION DESIGNS FOR THIS PROJECT. BARRAZA DESIGN, & HECTOR BARRAZA ARE NOT TO BE HELD RESPONSIBLE FOR THE STRUCTURAL DESIGN IN ANY WAY MATTER OR FORM IF ANY ISSUES OR PROBLEMS ARISE.

PROJECT

Residence

424. N. Olive San Antonio, TX, 78202

OWNER

Cy Goudge 305 Castano Ave. San Antonio, Texas, 78209

PROJECT NUMB

104 424. N. Olive

CONSTRUCT. DOCS.

1 12/5/2018 COSA Permit Set

NO. DATE DESCRIPTION OF ISSUE

CONSUL

SHEET TITLE
SITE PLAN


05 DECEMBER 2018


SHEET NUMBE

PLAN NOTES:

- 1. DIMENSIONS ARE FROM FACE OF STUDS, EDGE OF CONCRETE, COLUMN CENTERLINES, WINDOW AND DOOR CENTERLINES UNLESS NOTED OTHERWISE
- 2. ALL DOORS ARE TO BE 6" FROM FACE OF ADJACENT PERPENDICULAR STUD WALL TO EDGE OF DOOR (U.N.O).
- 3. FIRST FLOOR: 10'-0" PLATE HEIGHT (U.N.O.)
- 4. FIRST FLOOR: 8'-0" WINDOW HEADER HEIGHT (U.N.O.)
- 5. ALL EXTERIOR WALLS TO BE 4" STUD WALLS (U.N.O.)
- CONTRACTOR TO VERIFY ALL EXISTING CONDITIONS AND PLAN DIMENSIONS PRIOR TO BEGINNING ANY CONSTRUCTION OR FABRICATION AND NOTIFY DESIGNER IN WRITING OF ANY DISCREPANCIES.
- CONTRACTOR TO PROVIDE TREATED WOOD BLOCKING AS NECESSARY FOR ANY WALL MOUNTED ITEM OR ACCESSORIES.
- CONTRACTOR SHALL VERIFY ALL DIMENSIONS TO ENSURE PROPER FIT PRIOR TO MANUFACTURING MILLWORK OR ORDERING ANY SPECIALTY ITEMS OR EQUIPMENT.
- 9. REFER TO TEXAS ACCESSIBILITY STANDARDS (T.A.S.) FOR ALL MOUNTING HEIGHTS, DOOR CLEARANCES, ETC. PROVIDE FIRE RATED EXTINGUISHER CABINET WHEN LOCATED IN RATED PARTITION.
- 10. ALL INTERIOR WALLS TO BE 4" STUD WALLS (U.N.O)
- 11. ESCAPE/RESCUE WINDOWS FROM SLEEPING AREAS SHALL HAVE A MINIMUM 5.7 SQUARE FOOT CLEAR NET OPENING AND MINIMUM CLEAR OPENING WIDTH OF 20". FINISHED SILL HEIGHT SHALL BE A MAXIMUM OF 44" ABOVE FINISH
- 12. ELECTRICAL CONTRACTOR TO LOCATE 110V GFI OUTLET WITHIN 25'-0" OF A/C COMPRESSOR
- 13. INSTALL LIGHT SWITCHES AND ELECTRICAL CONTROLS NO HIGHER THAN 48" AND ELECTRICAL OUTLETS NO LOWER THAN 15" ABOVE FINISH FLOOR.
- 14. PROVIDE FOR CROSS VENTILATION AT ENCLOSED ATTICS.
- 15. PROVIDE ONE SMOKE DETECTOR IN EACH SLEEPING AREA, CENTRALLY LOCATE ONE IN EACH HALLWAY LEADING TO SLEEPING AREAS-PER IRC 2015. SEE SHEET A-103 FOR RCP/ELECTRICAL PLAN.
- 16. SMOKE ALARMS SHALL BE WIRED IN SERIES WITH BATTERY BACKUP POWER AS PER I.R.C. SEC R317
- 17. INSTALL LEVER HANDLES ON ALL DOORS AND PLUMBING FIXTURES.
- 18. PROVIDE TEMPERED GLASS ON ALL GLASS LOCATED WITHIN 24" OF DOOR

- NO HIGHER THAN 48" ABOVE FINISH FLOOR (A.F.F.) EACH ELECTRIC OUTLET

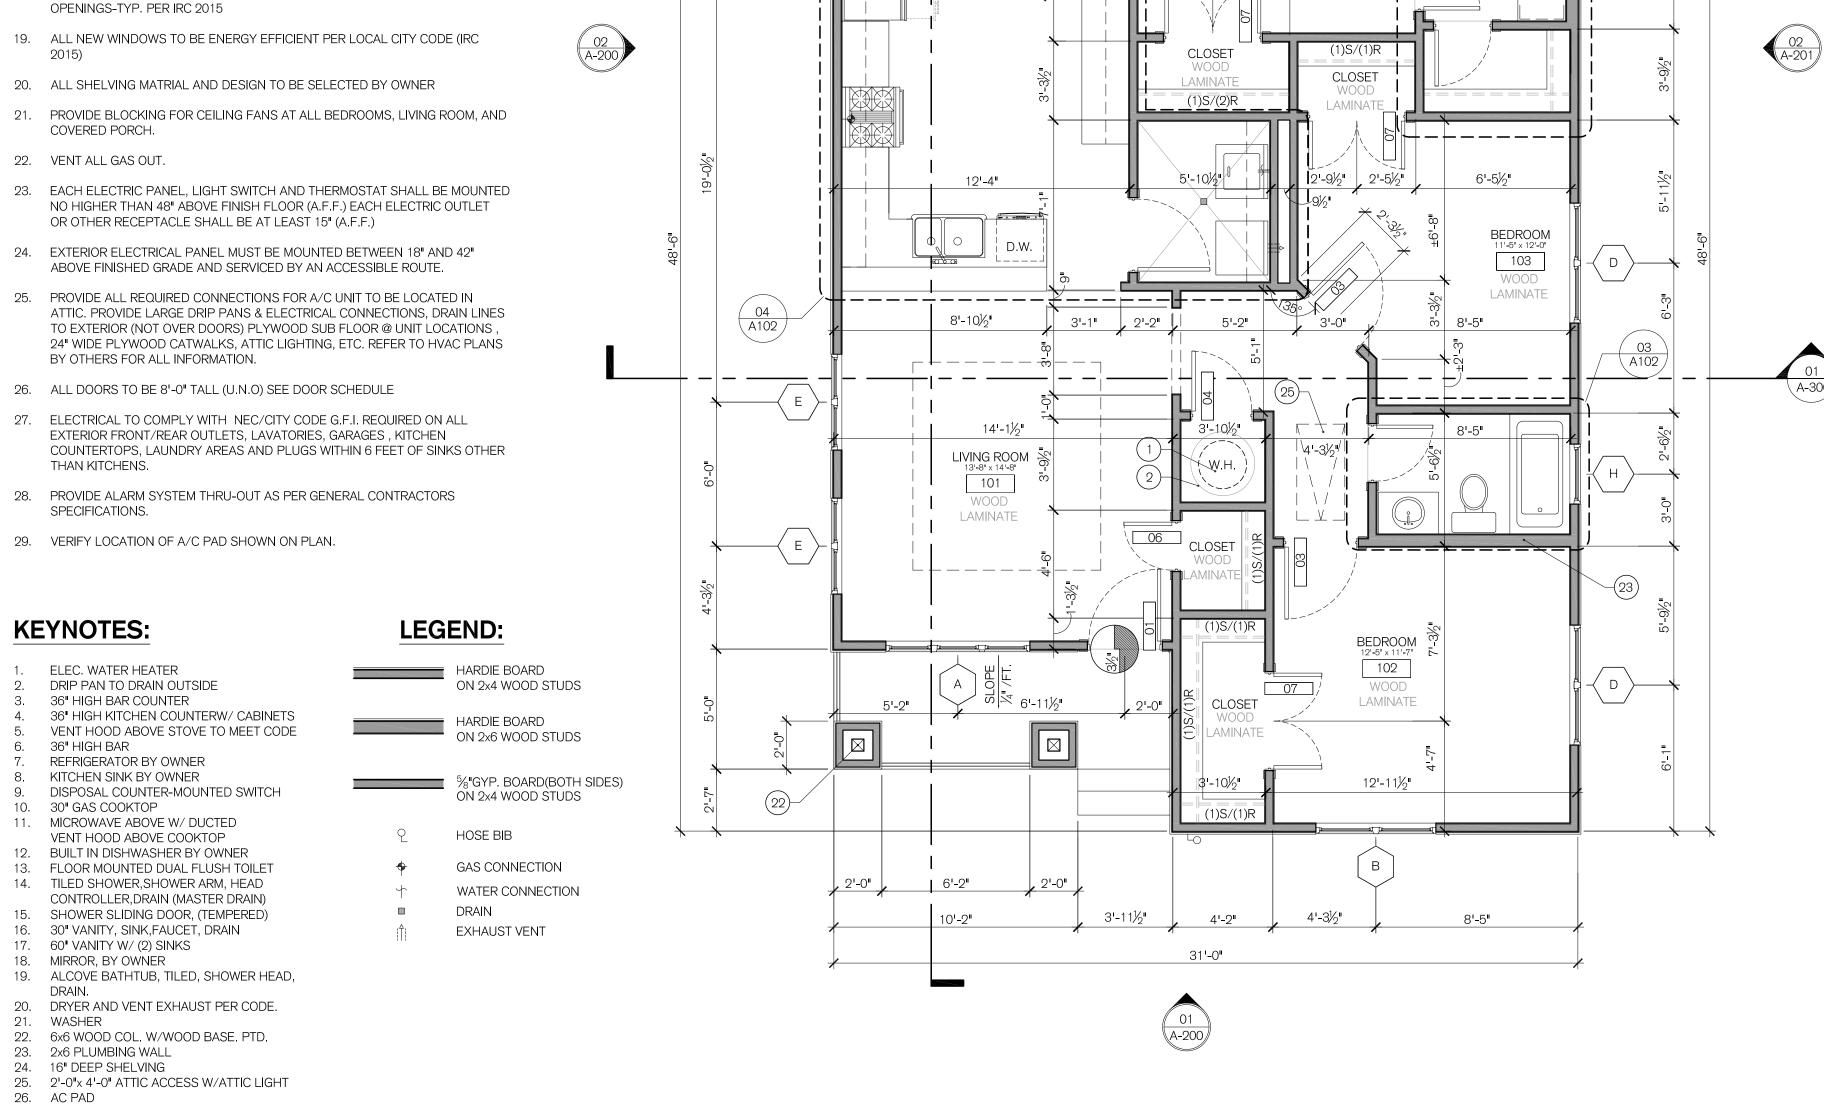

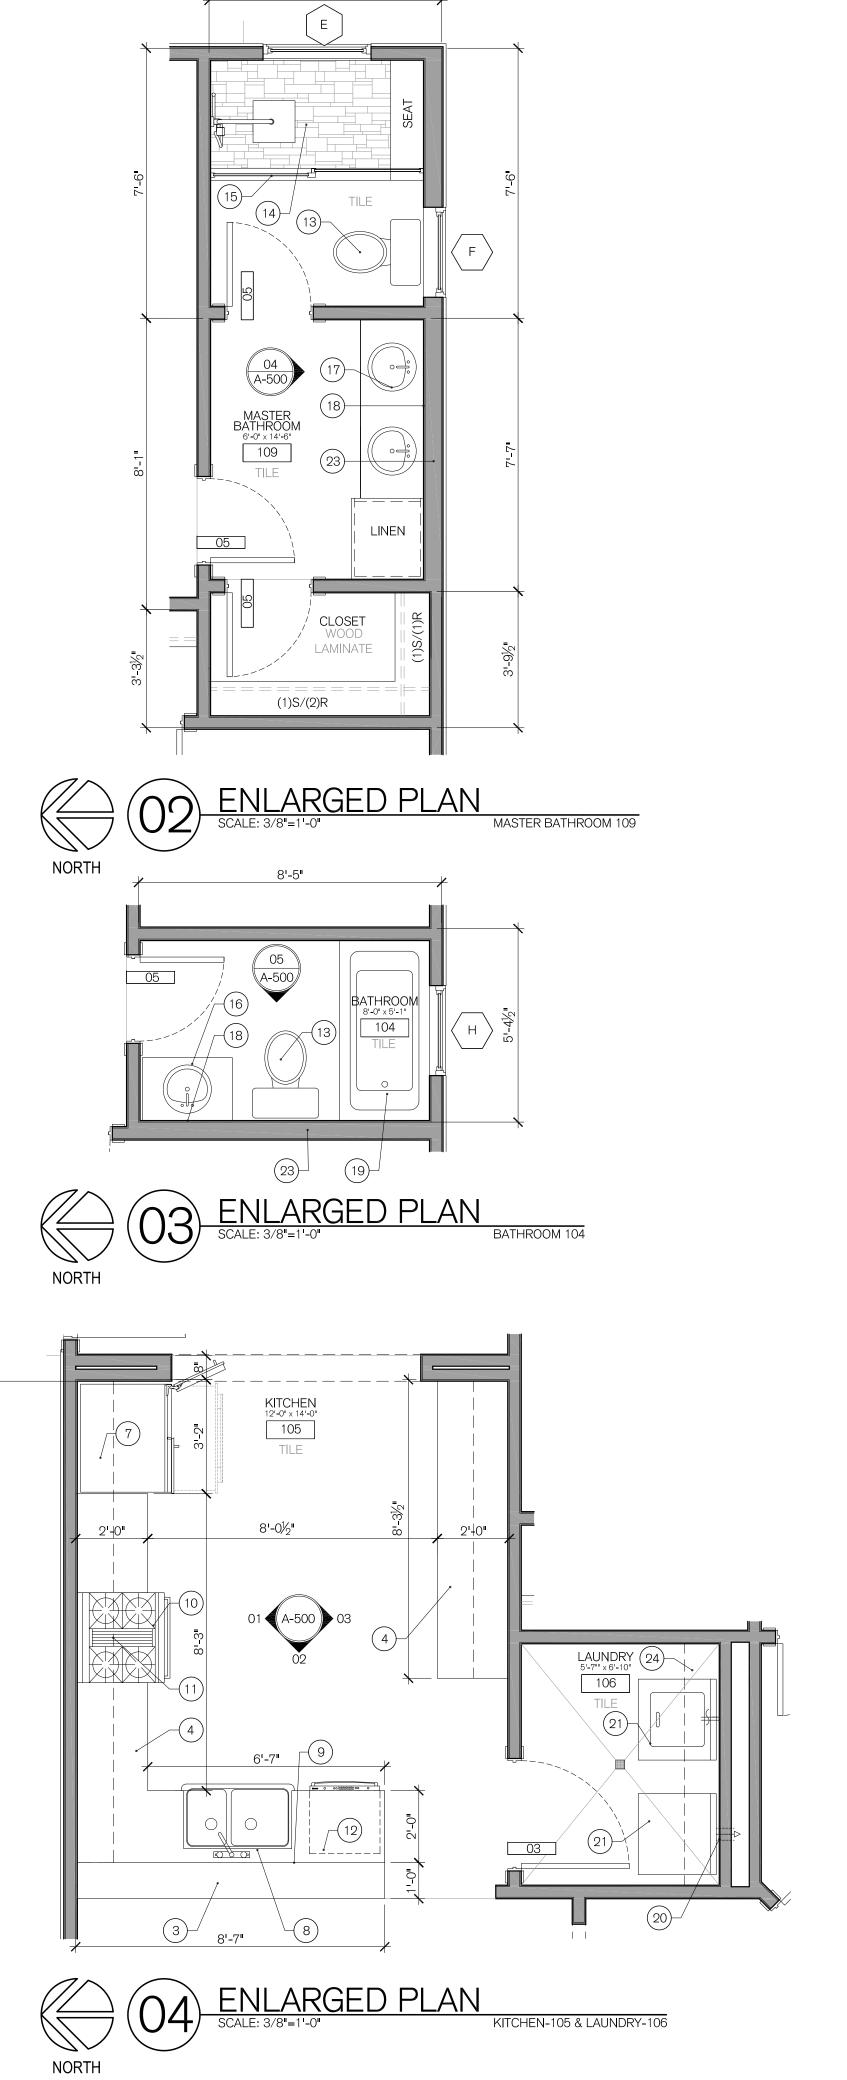



Residence 424. N. Olive San Antonio, TX, 78202

OWNER

San Antonio, Texas, 78209

ROJECT NUMBER 104 424. N. Olive

CONSTRUCT. DOCS.


NO. DATE DESCRIPTION OF ISSUE 1 12/5/2018 COSA Permit Set

SHEET TITLE FLOOR PLAN

05 DECEMBER 2018

SHEETNUMBER A-102





31'-0"

6'-1½**"**

MASTER BEDROOM

LAMINATE

5'-3"

3'-2½**"**

FLOATING DECK

110

DINING ROOM 12'-0" x 9'-0"

107

LAMINATE


3'-0" 3'-5½"

PLAN NOTES:

- 1. PROVIDE ELECTRICAL AND/OR GAS AS REQUIRED FOR RANGE, HOT WATER HEATERS, POWER VENTS & HVAC.
- 2. PROVIDE ELECTRICAL W/CUT-OFF SWITCH FOR HVAC CONDENSERS-VERIFY LOCATION W/OWNER.
- 3. ALL SLEEPING AREAS TO BE PROTECTED WITH UL APPROVED SMOKE DETECTORS. POWER TO 110V HOUSE ELECTRICAL POWER SOURCE AND PROVIDE A BATTERY BACK-UP.
- 4. PROVIDE ELECTRICAL OUTLETS AT SOFFITS- VERIFY QUANITYT AND LOCATION WITH OWNER.

2' x 4' FLUORESCENT LIGHT FIXTURE

ELECTRICAL LEGEND:

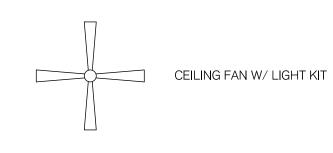

LIGHT FIXTURE

CHANDELIER

INCANDESCENT

110 VOLT OUTLET

220 VOLT OUTLET

110 VOLT OUTLET (GFI)

SMOKE DETECTOR

LIGHT SWITCH

TELEPHONE JACK

CABLE JACK (TV)

RECESSED DOWN LIGHTING

WALL MOUNTED LIGHTING

WALL MOUNTED FLOOD LIGHTING


THERMOSTAT

KEYNOTES:

1. DATA AND TV RECEPTACLE IN LAUNDRY ROOM TO BE LOCATED 7' ABOVE FINISH

DOOR BELL

2. FAN IN LIVING ROOM TO BE FAN ONLY; NO

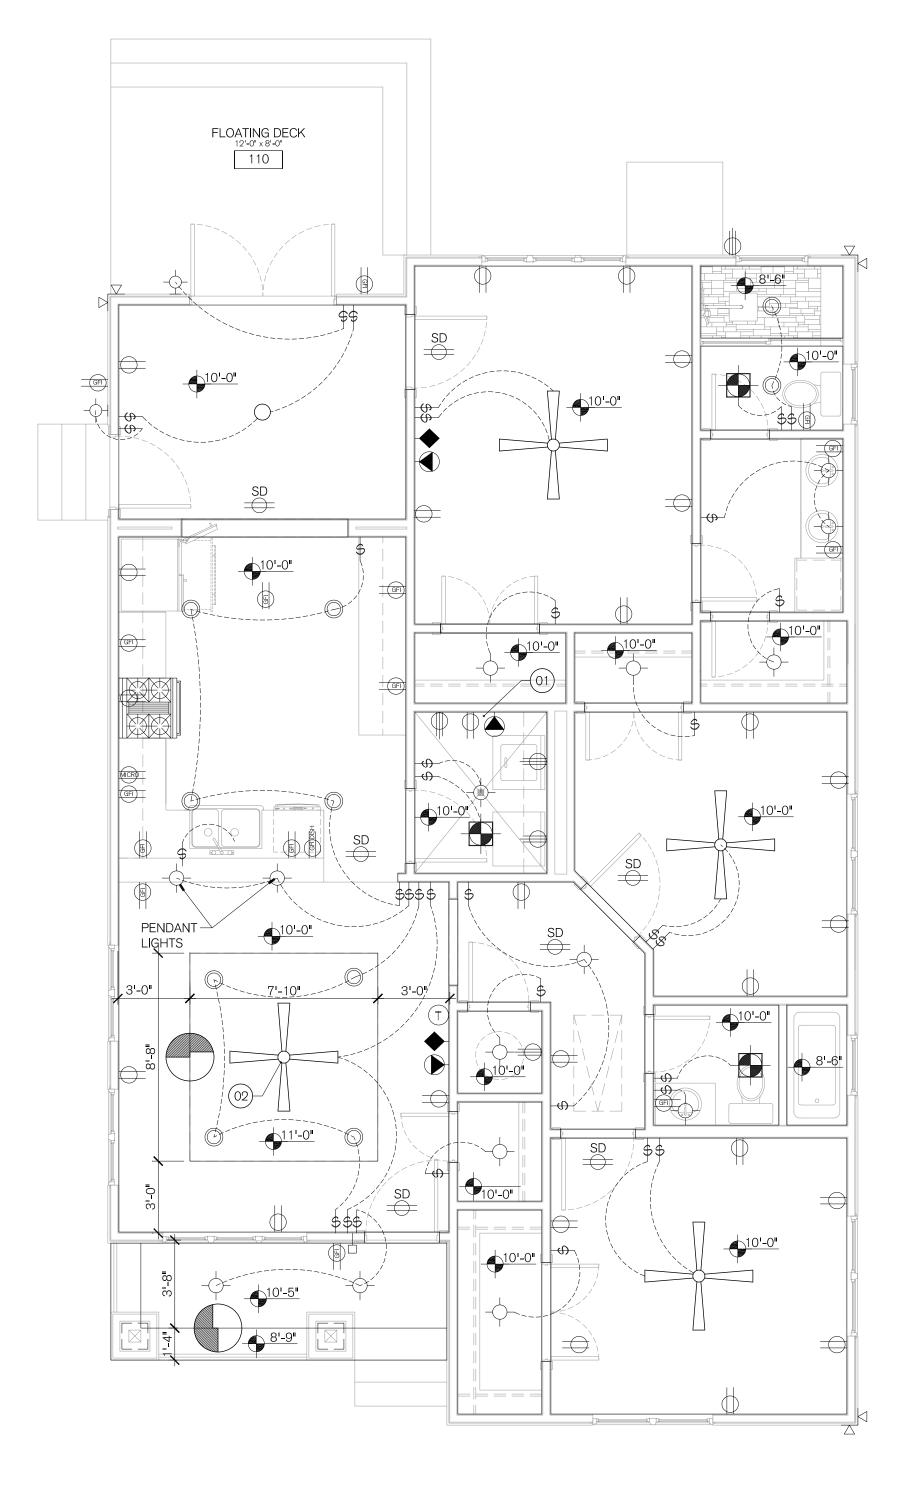



DATE 05 DECEMBER 2018

BARRAZA DESIGN 3830 SALTY MARSH, SAN ANTONIO, TEXAS 78215 VOICE: (210) 209-6127

THIS PLAN AND THE DESIGNS CONTAINED HEREIN ARE THE PROPERTY OF BARRAZA DESIGNS, LLC AND HECTOR BARRAZA AND MAY NOT BE REPRODUCED, ALL OR IN PART, WITHOUT WRITTEN CONSENT FROM HECTOR BARRAZA BARRAZA DESIGN, LLC IS A DESIGN FIRM, NOT AN ENGINEERING FIRM, WE DO NOT QUALIFY TO BE ONE NOR ARE WE LICENSED TO DESIGN STRUCTURAL FRAMING, WIND BRACING OR FOUNDATIONS. A LICENSED PROFESSIONAL ENGINEER SHOULD BE CONTRACTED AND CONSULTED IMMEDIATELY REGARDING FRAMING, WIND BRACING AND THE FOUNDATION DESIGNS. SHOULD AN ENGINEER'S SEAL BE PRESENT ON THESE DRAWINGS, THE "ENGINEER OF RECORD" SHALL BEAR ALL RESPONSIBILITY FOR THE STRUCTURE, WIND BRACING AND FOUNDATION DESIGNS FOR THIS PROJECT. BARRAZA DESIGN, & HECTOR BARRAZA ARE NOT TO BE HELD RESPONSIBLE FOR THE STRUCTURAL DESIGN IN ANY WAY MATTER OR FORM IF ANY ISSUES OR PROBLEMS ARISE.

PROJECT

Residence

424. N. Olive San Antonio, TX, 78202

OWNER

Cy Goudge 305 Castano Ave. San Antonio, Texas, 78209

104 424. N. Olive


CONSTRUCT. DOCS.

NO. DATE DESCRIPTION OF ISSUE 1 12/5/2018 COSA Permit Set

SHEET TITLE REFLECTED CEILING/ ELECTRICAL PLAN


05 DECEMBER 2018

SHEETNUMBER

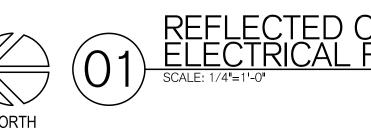

PLAN NOTES:

- 1. 6/12 ROOF SLOPE
- 2. TYPICAL ROOF OVERHANG IS 24" (U.N.O.)
- 3. PROVIDE GUTTERS AND DOWNSPOUTS AS DIRECTED BY OWNER.
- 4. ASPHALT SHINGLE ROOF, REFER TO MANUFACTURERS SPECIFICATIONS AND INSTALLATION INSTRUCTIONS.
- 4. PAINT ALL ASSOCIATED ROOFING COMPONENTS TO INCLUDE BUT NOT LIMITED TO; FASCIAS, SOFFITS,TRIM, ETC.
- 5. INSTALL ALL NECESSARY FLASHING PER LOCAL CITY CODE -IRC 2015 OR BETTER

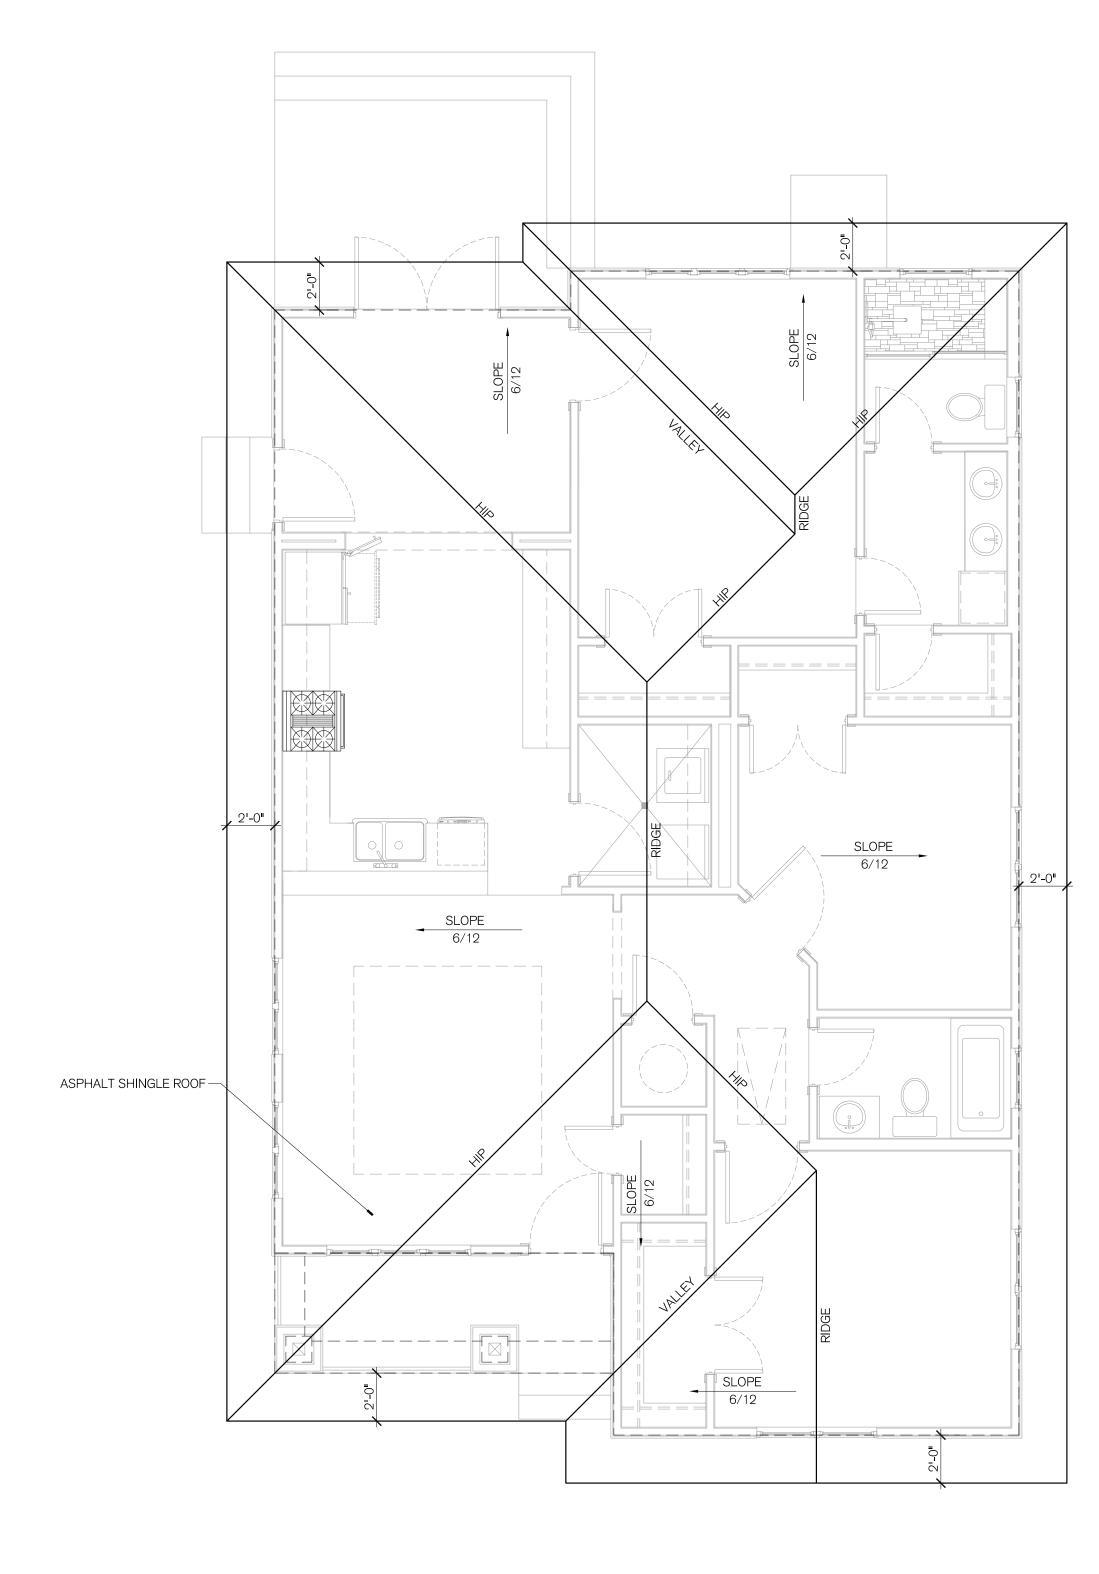



DATE 05 DECEMBER 2018

BARRAZA DESIGN 3830 SALTY MARSH, SAN ANTONIO, TEXAS 78215 VOICE: (210) 209-6127

THIS PLAN AND THE DESIGNS CONTAINED HEREIN ARE THE PROPERTY OF BARRAZA DESIGNS, LLC AND HECTOR BARRAZA AND MAY NOT BE REPRODUCED, ALL OR IN PART, WITHOUT WRITTEN CONSENT FROM HECTOR BARRAZA BARRAZA DESIGN, LLC IS A DESIGN FIRM, NOT AN ENGINEERING FIRM. WE DO NOT QUALIFY TO BE ONE NOR ARE WE LICENSED TO DESIGN STRUCTURAL FRAMING, WIND BRACING OR FOUNDATIONS. A LICENSED PROFESSIONAL ENGINEER SHOULD BE CONTRACTED AND CONSULTED IMMEDIATELY REGARDING FRAMING, WIND BRACING AND THE FOUNDATION DESIGNS. SHOULD AN ENGINEER'S SEAL BE PRESENT ON THESE DRAWINGS, THE "ENGINEER OF RECORD" SHALL BEAR ALL RESPONSIBILITY FOR THE STRUCTURE, WIND BRACING AND FOUNDATION DESIGNS FOR THIS PROJECT. BARRAZA DESIGN, & HECTOR BARRAZA ARE NOT TO BE HELD RESPONSIBLE FOR THE STRUCTURAL DESIGN IN ANY WAY MATTER OR FORM IF ANY ISSUES OR PROBLEMS ARISE.

PROJECT

Residence 424. N. Olive San Antonio, TX, 78202

OWNER

Cy Goudge 305 Castano Ave. San Antonio, Texas, 78209

ROJECT NUMBER

104 424. N. Olive

CONSTRUCT. DOCS.

NO. DATE DESCRIPTION OF ISSUE


1 12/5/2018 COSA Permit Set

ROOF PLAN

05 DECEMBER 2018

SHEETNUM



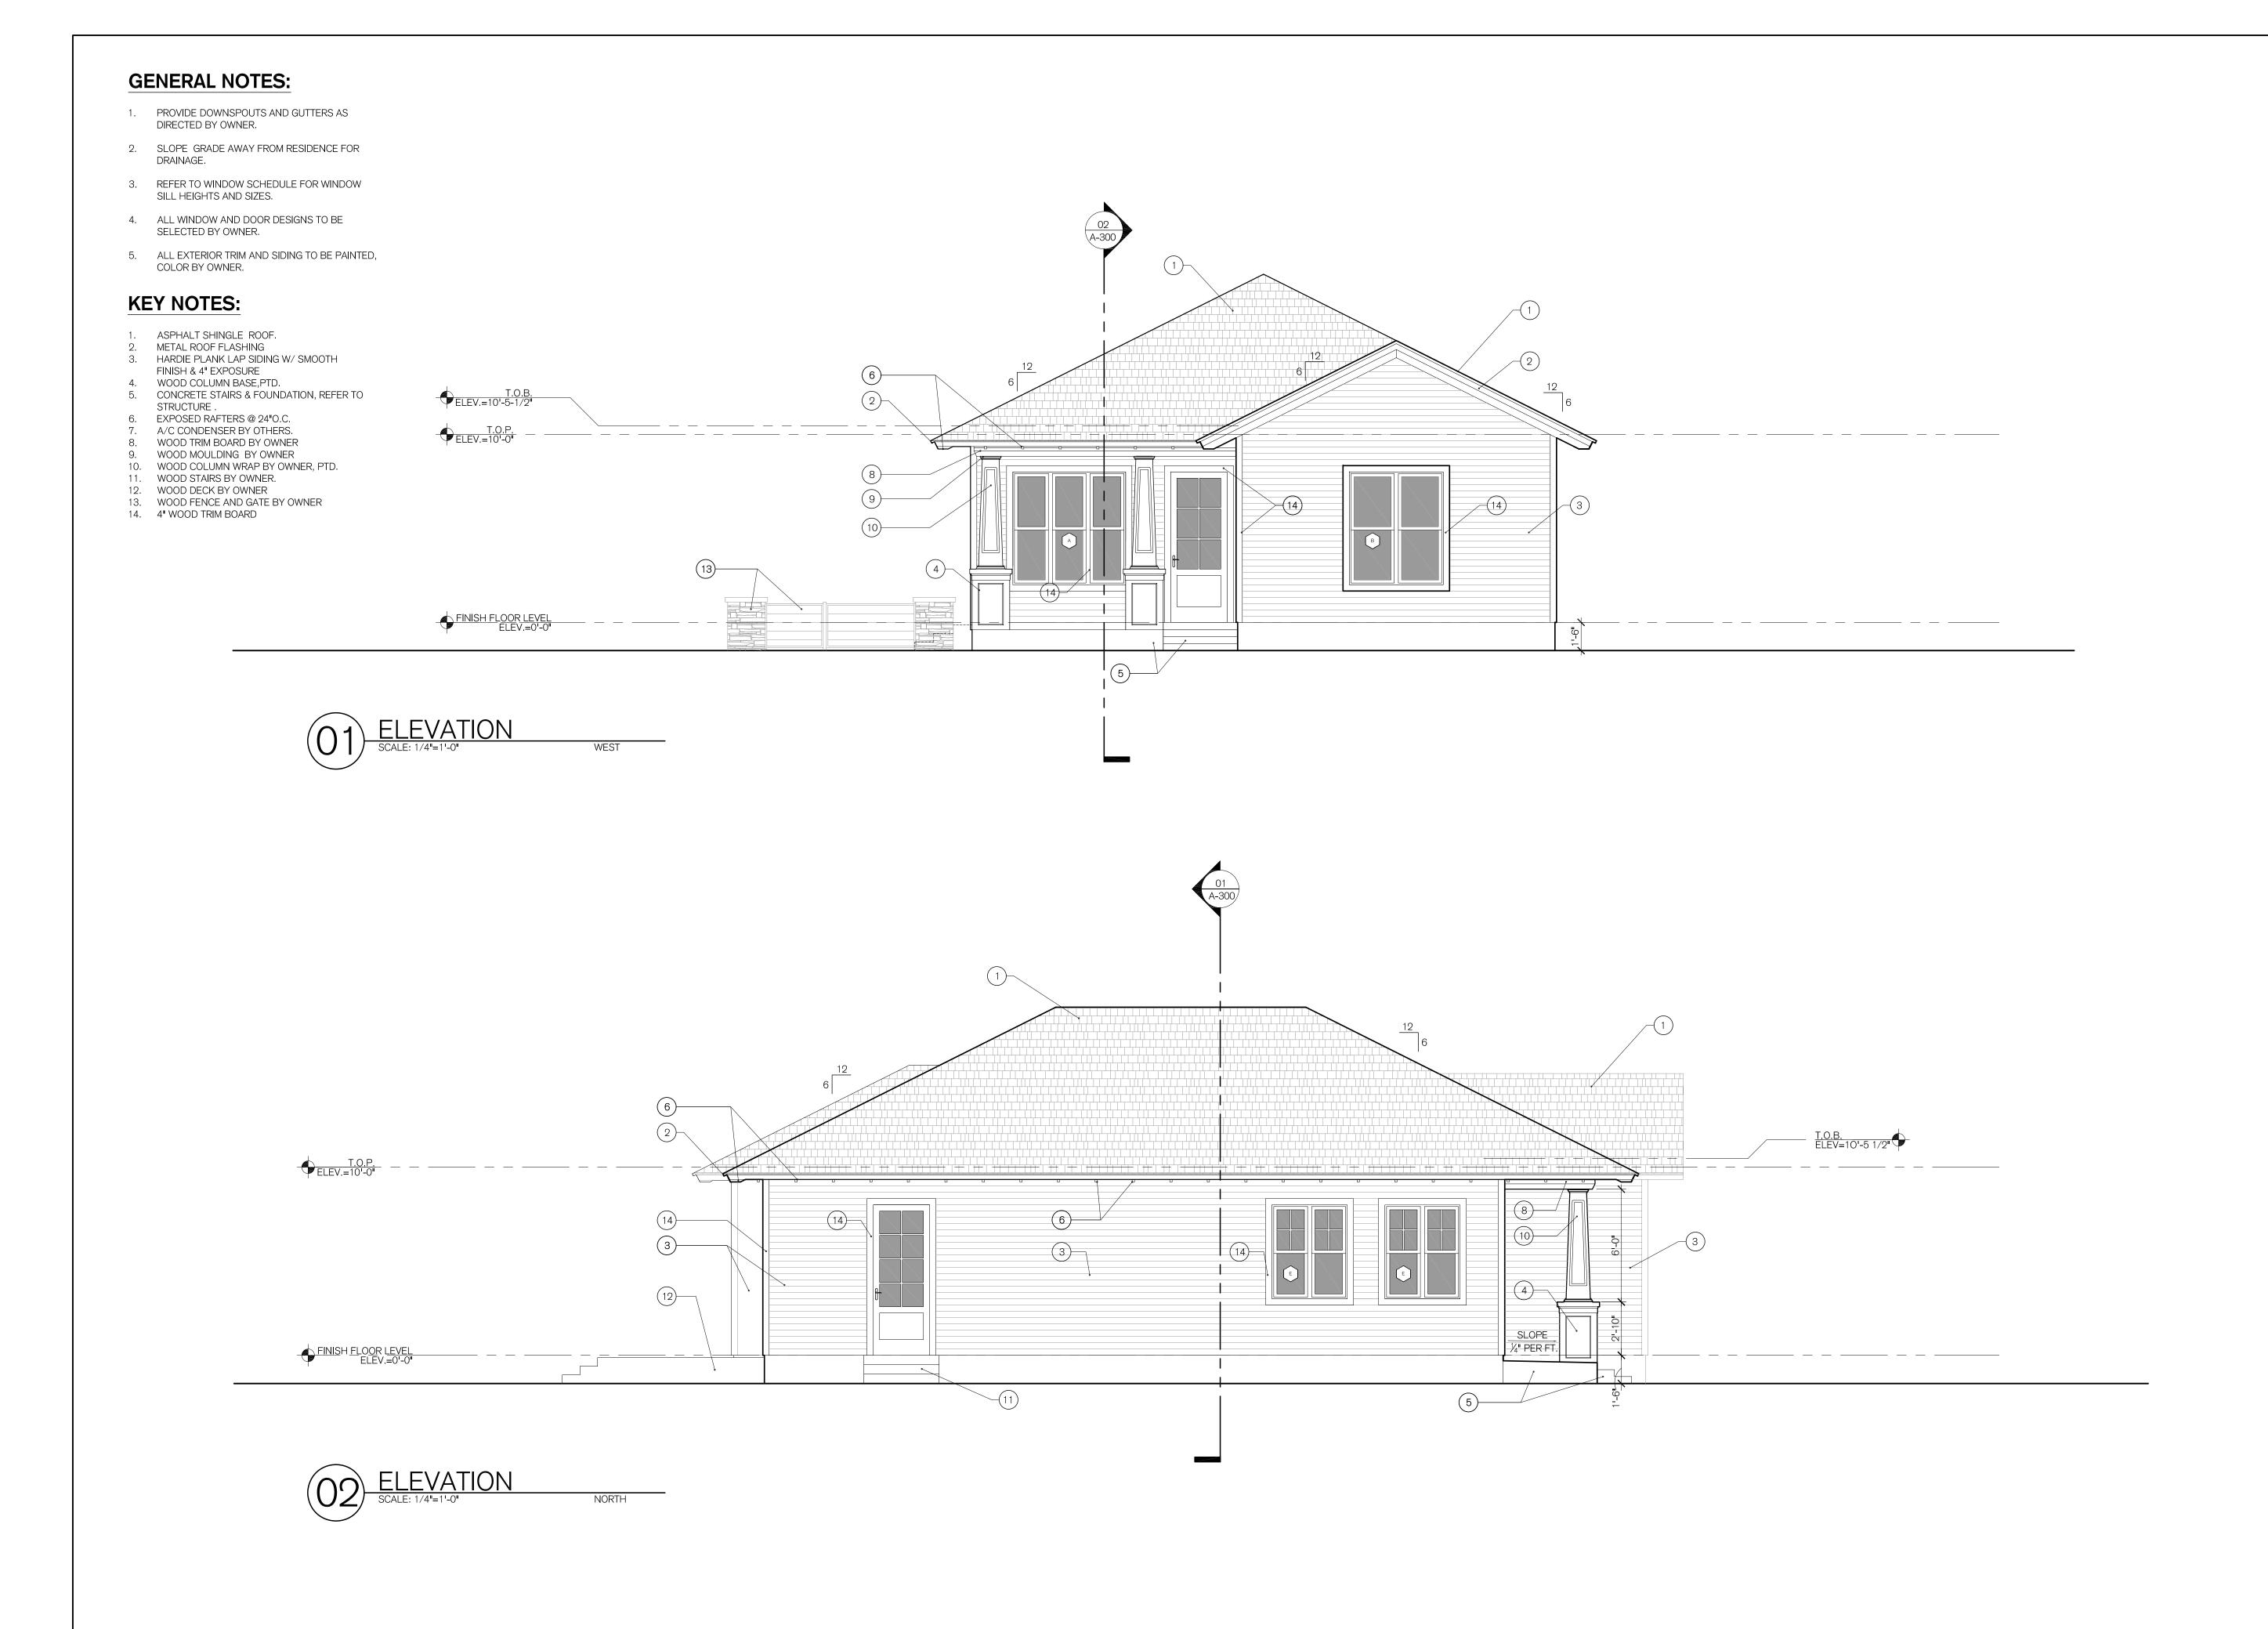



DATE 05 DECEMBER 2018

BARRAZA DESIGN 3830 SALTY MARSH, SAN ANTONIO, TEXAS 78215 VOICE: (210) 209-6127

THIS PLAN AND THE DESIGNS CONTAINED HEREIN ARE THE PROPERTY OF BARRAZA DESIGNS, LLC AND HECTOR BARRAZA AND MAY NOT BE REPRODUCED, ALL OR IN PART, WITHOUT WRITTEN CONSENT FROM HECTOR BARRAZA BARRAZA DESIGN, LLC IS A DESIGN FIRM, NOT AN ENGINEERING FIRM, WE DO NOT QUALIFY TO BE ONE NOR ARE WE LICENSED TO DESIGN STRUCTURAL FRAMING, WIND BRACING OR FOUNDATIONS. A LICENSED PROFESSIONAL ENGINEER SHOULD BE CONTRACTED AND CONSULTED IMMEDIATELY REGARDING FRAMING, WIND BRACING AND THE FOUNDATION DESIGNS. SHOULD AN ENGINEER'S SEAL BE PRESENT ON THESE DRAWINGS, THE "ENGINEER OF RECORD" SHALL BEAR ALL RESPONSIBILITY FOR THE STRUCTURE, WIND BRACING AND FOUNDATION DESIGNS FOR THIS PROJECT. BARRAZA DESIGN, & HECTOR BARRAZA ARE NOT TO BE HELD RESPONSIBLE FOR THE STRUCTURAL DESIGN IN ANY WAY MATTER OR FORM IF ANY ISSUES OR PROBLEMS ARISE.

PROJECT

Residence
424. N. Olive

San Antonio, TX, 78202

OWNER

Cy Goudge 305 Castano Ave. San Antonio, Texas, 78209

ROJECT NUMBER

104 424. N. Olive

CONSTRUCT. DOCS.

NO. DATE DESCRIPTION OF ISSUE

1 12/5/2018 COSA Permit Set

.....

.....

CONSULTAN

EXTERIOR ELEVATIONS

05 DECEMBER 2018


SHEET NUMBER




- 1. PROVIDE DOWNSPOUTS AND GUTTERS AS DIRECTED BY OWNER.
- SLOPE GRADE AWAY FROM RESIDENCE FOR DRAINAGE.
- 3. REFER TO WINDOW SCHEDULE FOR WINDOW SILL HEIGHTS AND SIZES.
- 4. ALL WINDOW AND DOOR DESIGNS TO BE SELECTED BY OWNER.
- 5. ALL EXTERIOR TRIM AND SIDING TO BE PAINTED, COLOR BY OWNER.

KEY NOTES:

- ASPHALT SHINGLE ROOF. METAL ROOF FLASHING
- 3. HARDIE PLANK LAP SIDING W/ SMOOTH
- FINISH & 4" EXPOSURE
- 4. WOOD COLUMN BASE,PTD. 5. CONCRETE STAIRS & FOUNDATION, REFER TO
- STRUCTURE .
- 6. EXPOSED RAFTERS @ 24"O.C.
- A/C CONDENSER BY OTHERS.
- 8. WOOD TRIM BOARD BY OWNER
- 9. WOOD MOULDING BY OWNER
- 10. WOOD COLUMN WRAP BY OWNER, PTD.
- 11. WOOD STAIRS BY OWNER. 12. WOOD DECK BY OWNER
- 13. WOOD FENCE AND GATE BY OWNER
- 14. 4' WOOD TRIM BOARD

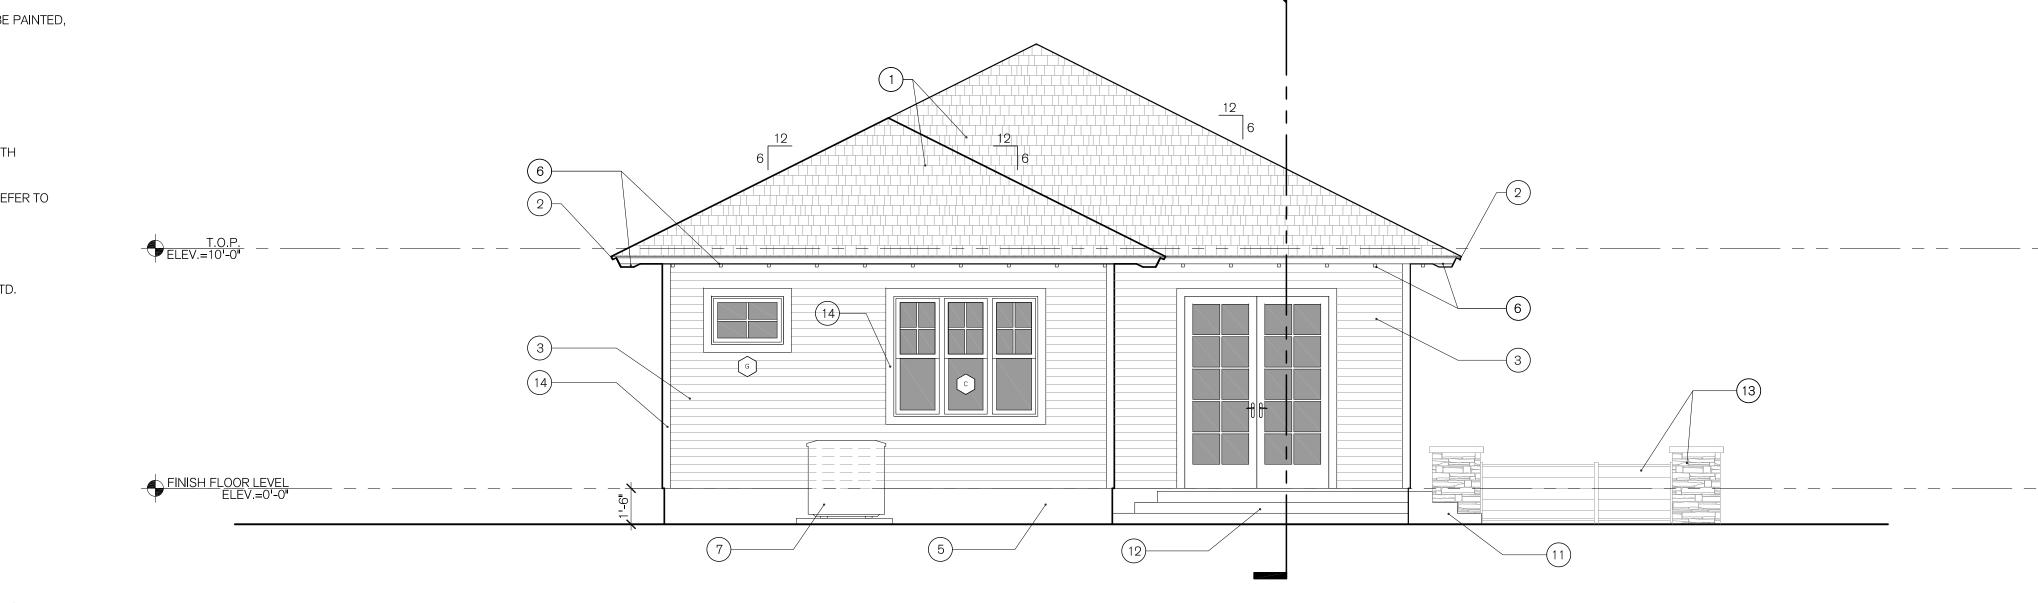



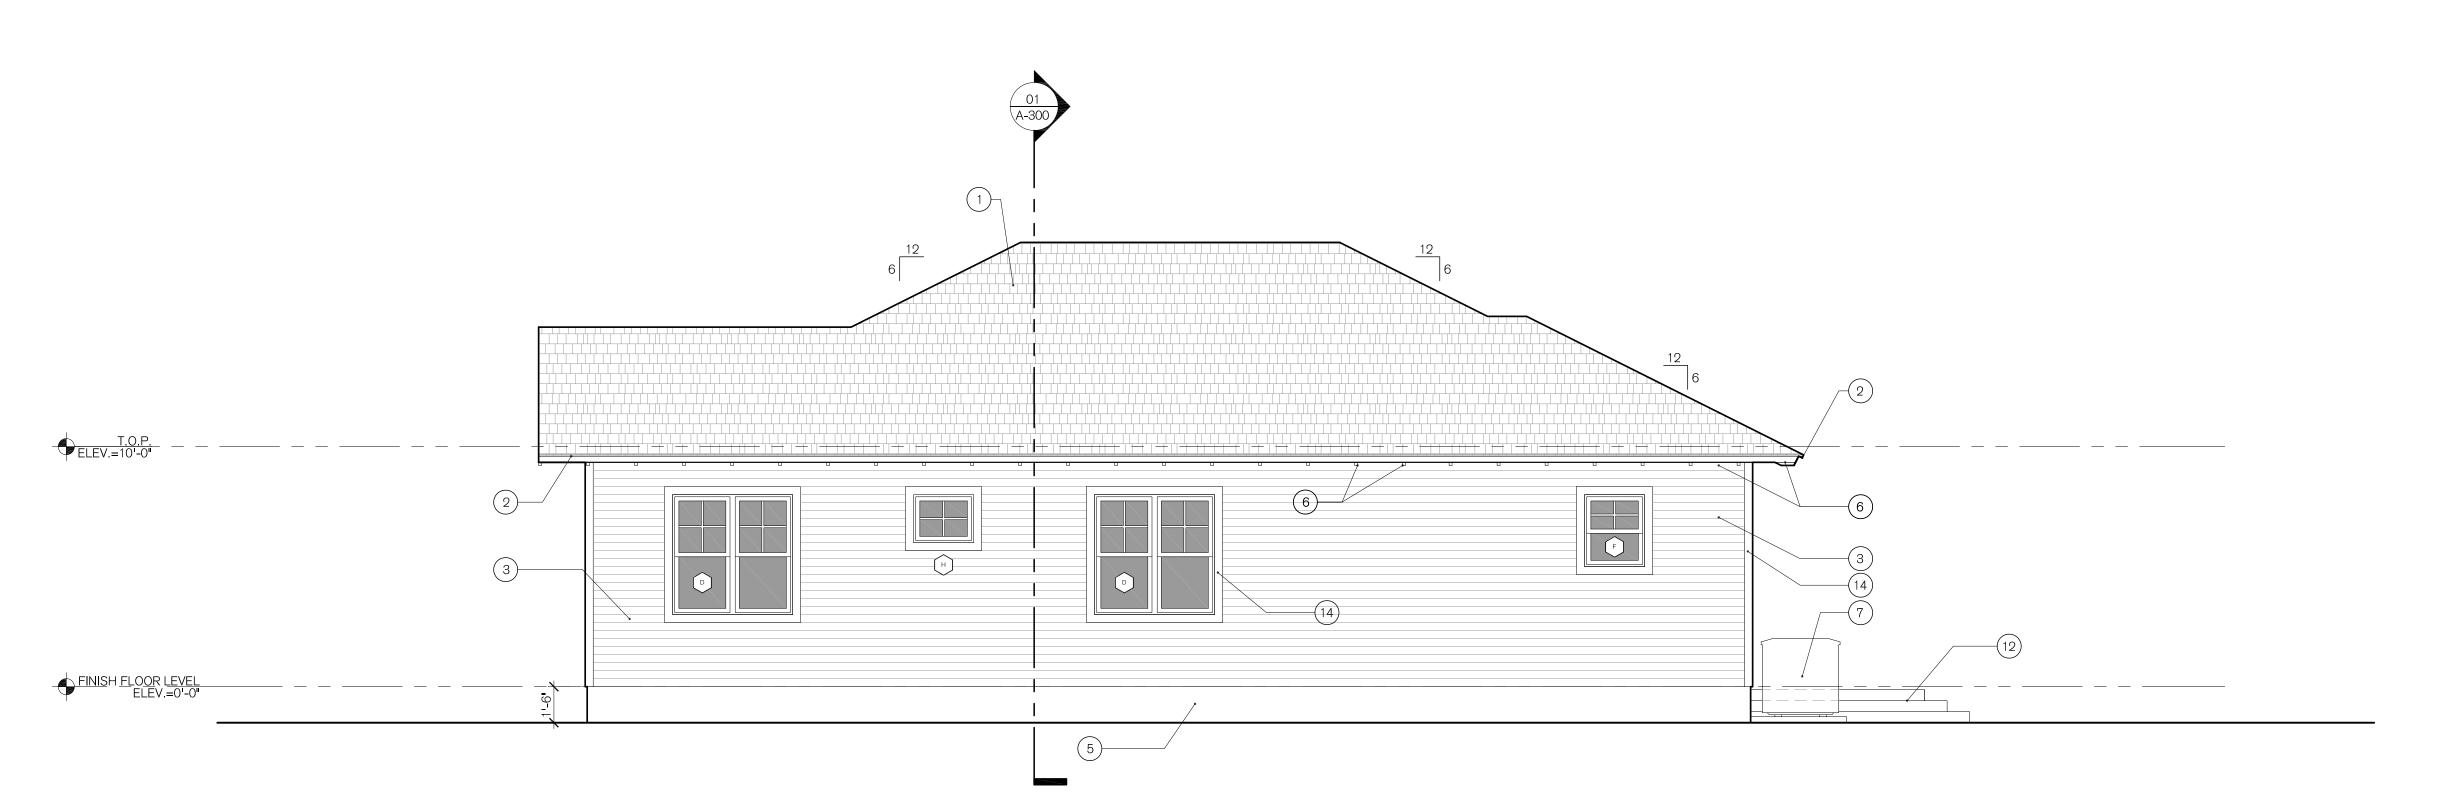





DATE 05 DECEMBER 2018

BARRAZA DESIGN 3830 SALTY MARSH, SAN ANTONIO, TEXAS 78215 VOICE: (210) 209-6127

THIS PLAN AND THE DESIGNS CONTAINED HEREIN ARE THE PROPERTY OF BARRAZA DESIGNS, LLC AND HECTOR BARRAZA AND MAY NOT BE REPRODUCED, ALL OR IN PART, WITHOUT WRITTEN CONSENT FROM HECTOR BARRAZA BARRAZA DESIGN, LLC IS A DESIGN FIRM, NOT AN ENGINEERING FIRM. WE DO NOT QUALIFY TO BE ONE NOR ARE WE LICENSED TO DESIGN STRUCTURAL FRAMING, WIND BRACING OR FOUNDATIONS. A LICENSED PROFESSIONAL ENGINEER SHOULD BE CONTRACTED AND CONSULTED IMMEDIATELY REGARDING FRAMING, WIND BRACING AND THE FOUNDATION DESIGNS. SHOULD AN ENGINEER'S SEAL BE PRESENT ON THESE DRAWINGS, THE "ENGINEER OF RECORD" SHALL BEAR ALL RESPONSIBILITY FOR THE STRUCTURE, WIND BRACING AND FOUNDATION DESIGNS FOR THIS PROJECT. BARRAZA DESIGN, & HECTOR BARRAZA ARE NOT TO BE HELD RESPONSIBLE FOR THE STRUCTURAL DESIGN IN ANY WAY MATTER OR FORM IF ANY ISSUES OR PROBLEMS ARISE.

PROJECT

Residence 424. N. Olive

San Antonio, TX, 78202

OWNER

Cy Goudge 305 Castano Ave. San Antonio, Texas, 78209

104 424. N. Olive


CONSTRUCT. DOCS.

NO. DATE DESCRIPTION OF ISSUE 1 12/5/2018 COSA Permit Set

EXTERIOR ELEVATIONS


05 DECEMBER 2018

SHEETNUMBER

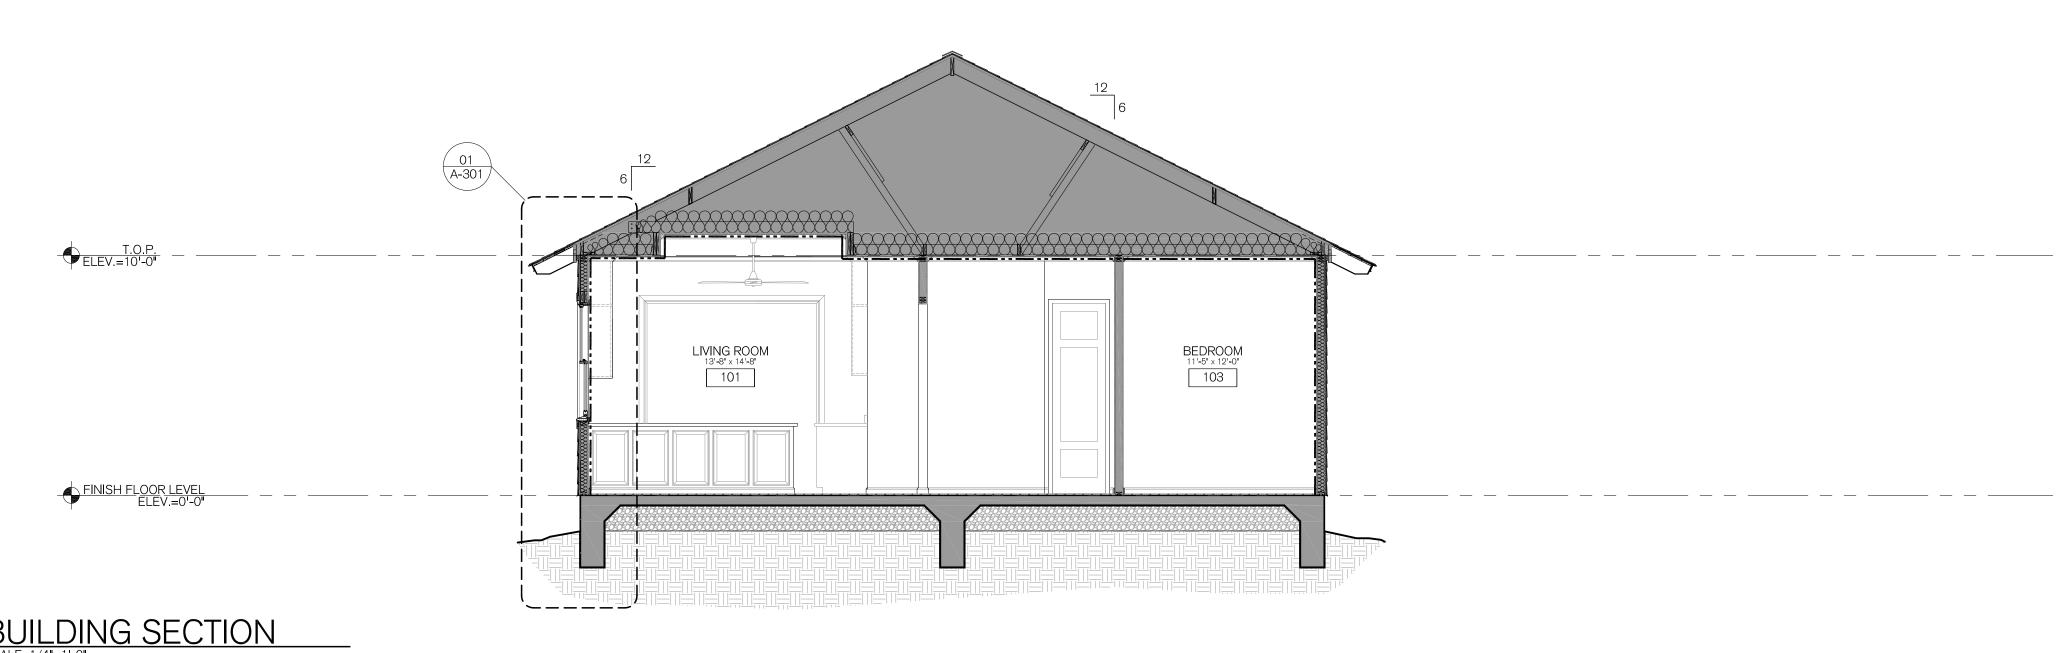

LEGEND:

———— THERMAL ENVELOPE

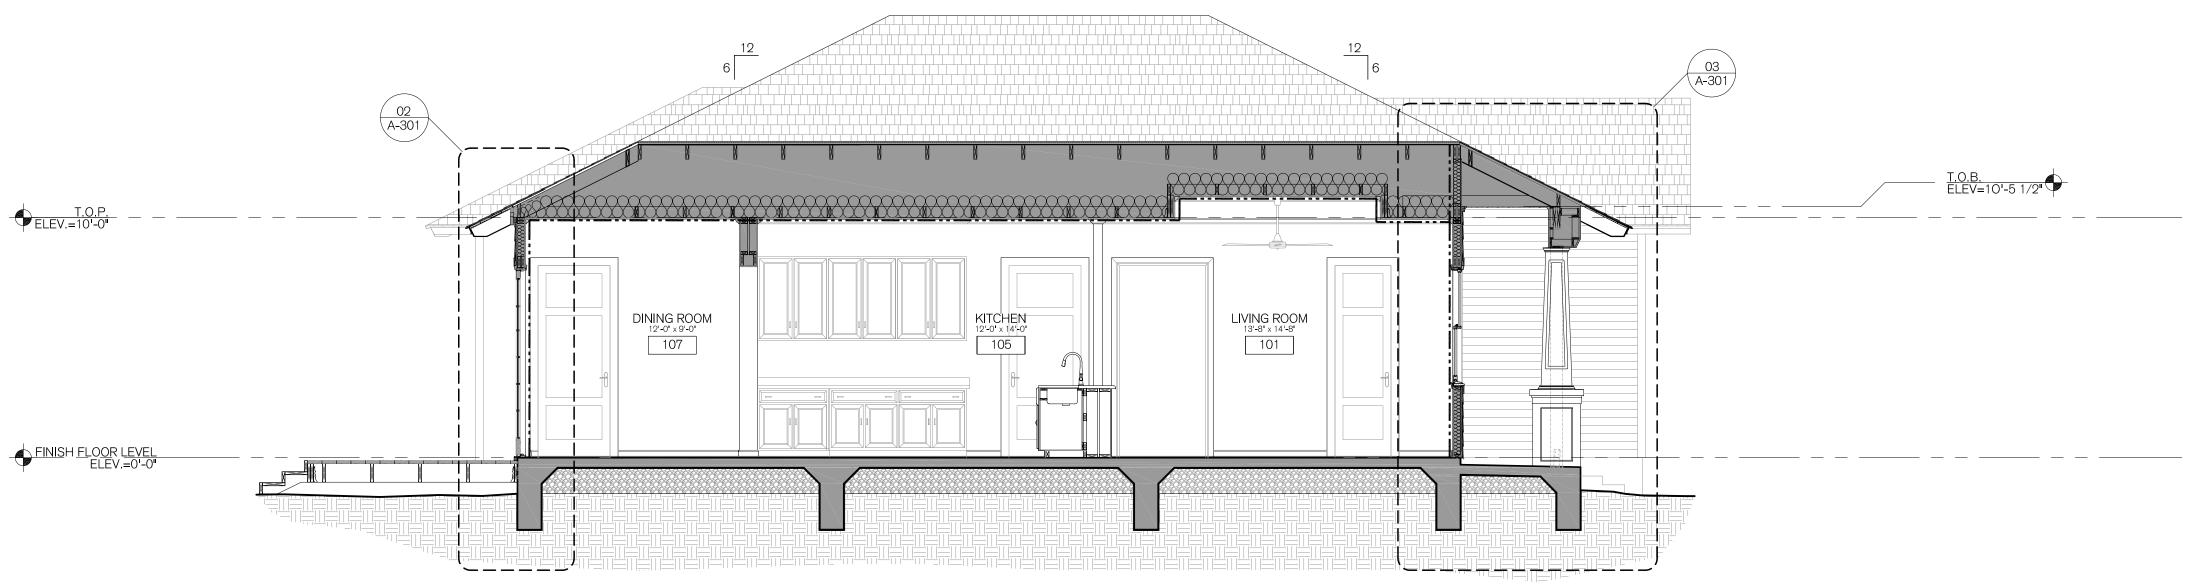

92 BUILDING SECTION
SCALE: 1/4"=1'-0"

LEGEND:

———— THERMAL ENVELOPE



DATE 05 DECEMBER 2018

BARRAZA DESIGN 3830 SALTY MARSH, SAN ANTONIO, TEXAS 78215 VOICE: (210) 209-6127

THIS PLAN AND THE DESIGNS CONTAINED HEREIN ARE THE PROPERTY OF BARRAZA DESIGNS, LLC AND HECTOR BARRAZA AND MAY NOT BE REPRODUCED, ALL OR IN PART, WITHOUT WRITTEN CONSENT FROM HECTOR BARRAZA BARRAZA DESIGN, LLC IS A DESIGN FIRM, NOT AN ENGINEERING FIRM. WE DO NOT QUALIFY TO BE ONE NOR ARE WE LICENSED TO DESIGN STRUCTURAL FRAMING, WIND BRACING OR FOUNDATIONS. A LICENSED PROFESSIONAL ENGINEER SHOULD BE CONTRACTED AND CONSULTED IMMEDIATELY REGARDING FRAMING, WIND BRACING AND THE FOUNDATION DESIGNS. SHOULD AN ENGINEER'S SEAL BE PRESENT ON THESE DRAWINGS, THE "ENGINEER OF RECORD" SHALL BEAR ALL RESPONSIBILITY FOR THE STRUCTURE, WIND BRACING AND FOUNDATION DESIGNS FOR THIS PROJECT. BARRAZA DESIGN, & HECTOR BARRAZA ARE NOT TO BE HELD RESPONSIBLE FOR THE STRUCTURAL DESIGN IN ANY WAY MATTER OR FORM IF ANY ISSUES OR PROBLEMS ARISE.

PROJECT

Residence 424. N. Olive San Antonio, TX, 78202

OWNER

Cy Goudge 305 Castano Ave. San Antonio, Texas, 78209

PROJECT NUMBE

104 424. N. Olive

CONSTRUCT. DOCS.

NO. DATE DESCRIPTION OF ISSUE

1 12/5/2018 COSA Permit Set


.....

CONSU

BUILDING SECTIONS

05 DECEMBER 2018

SHEET NUMBER

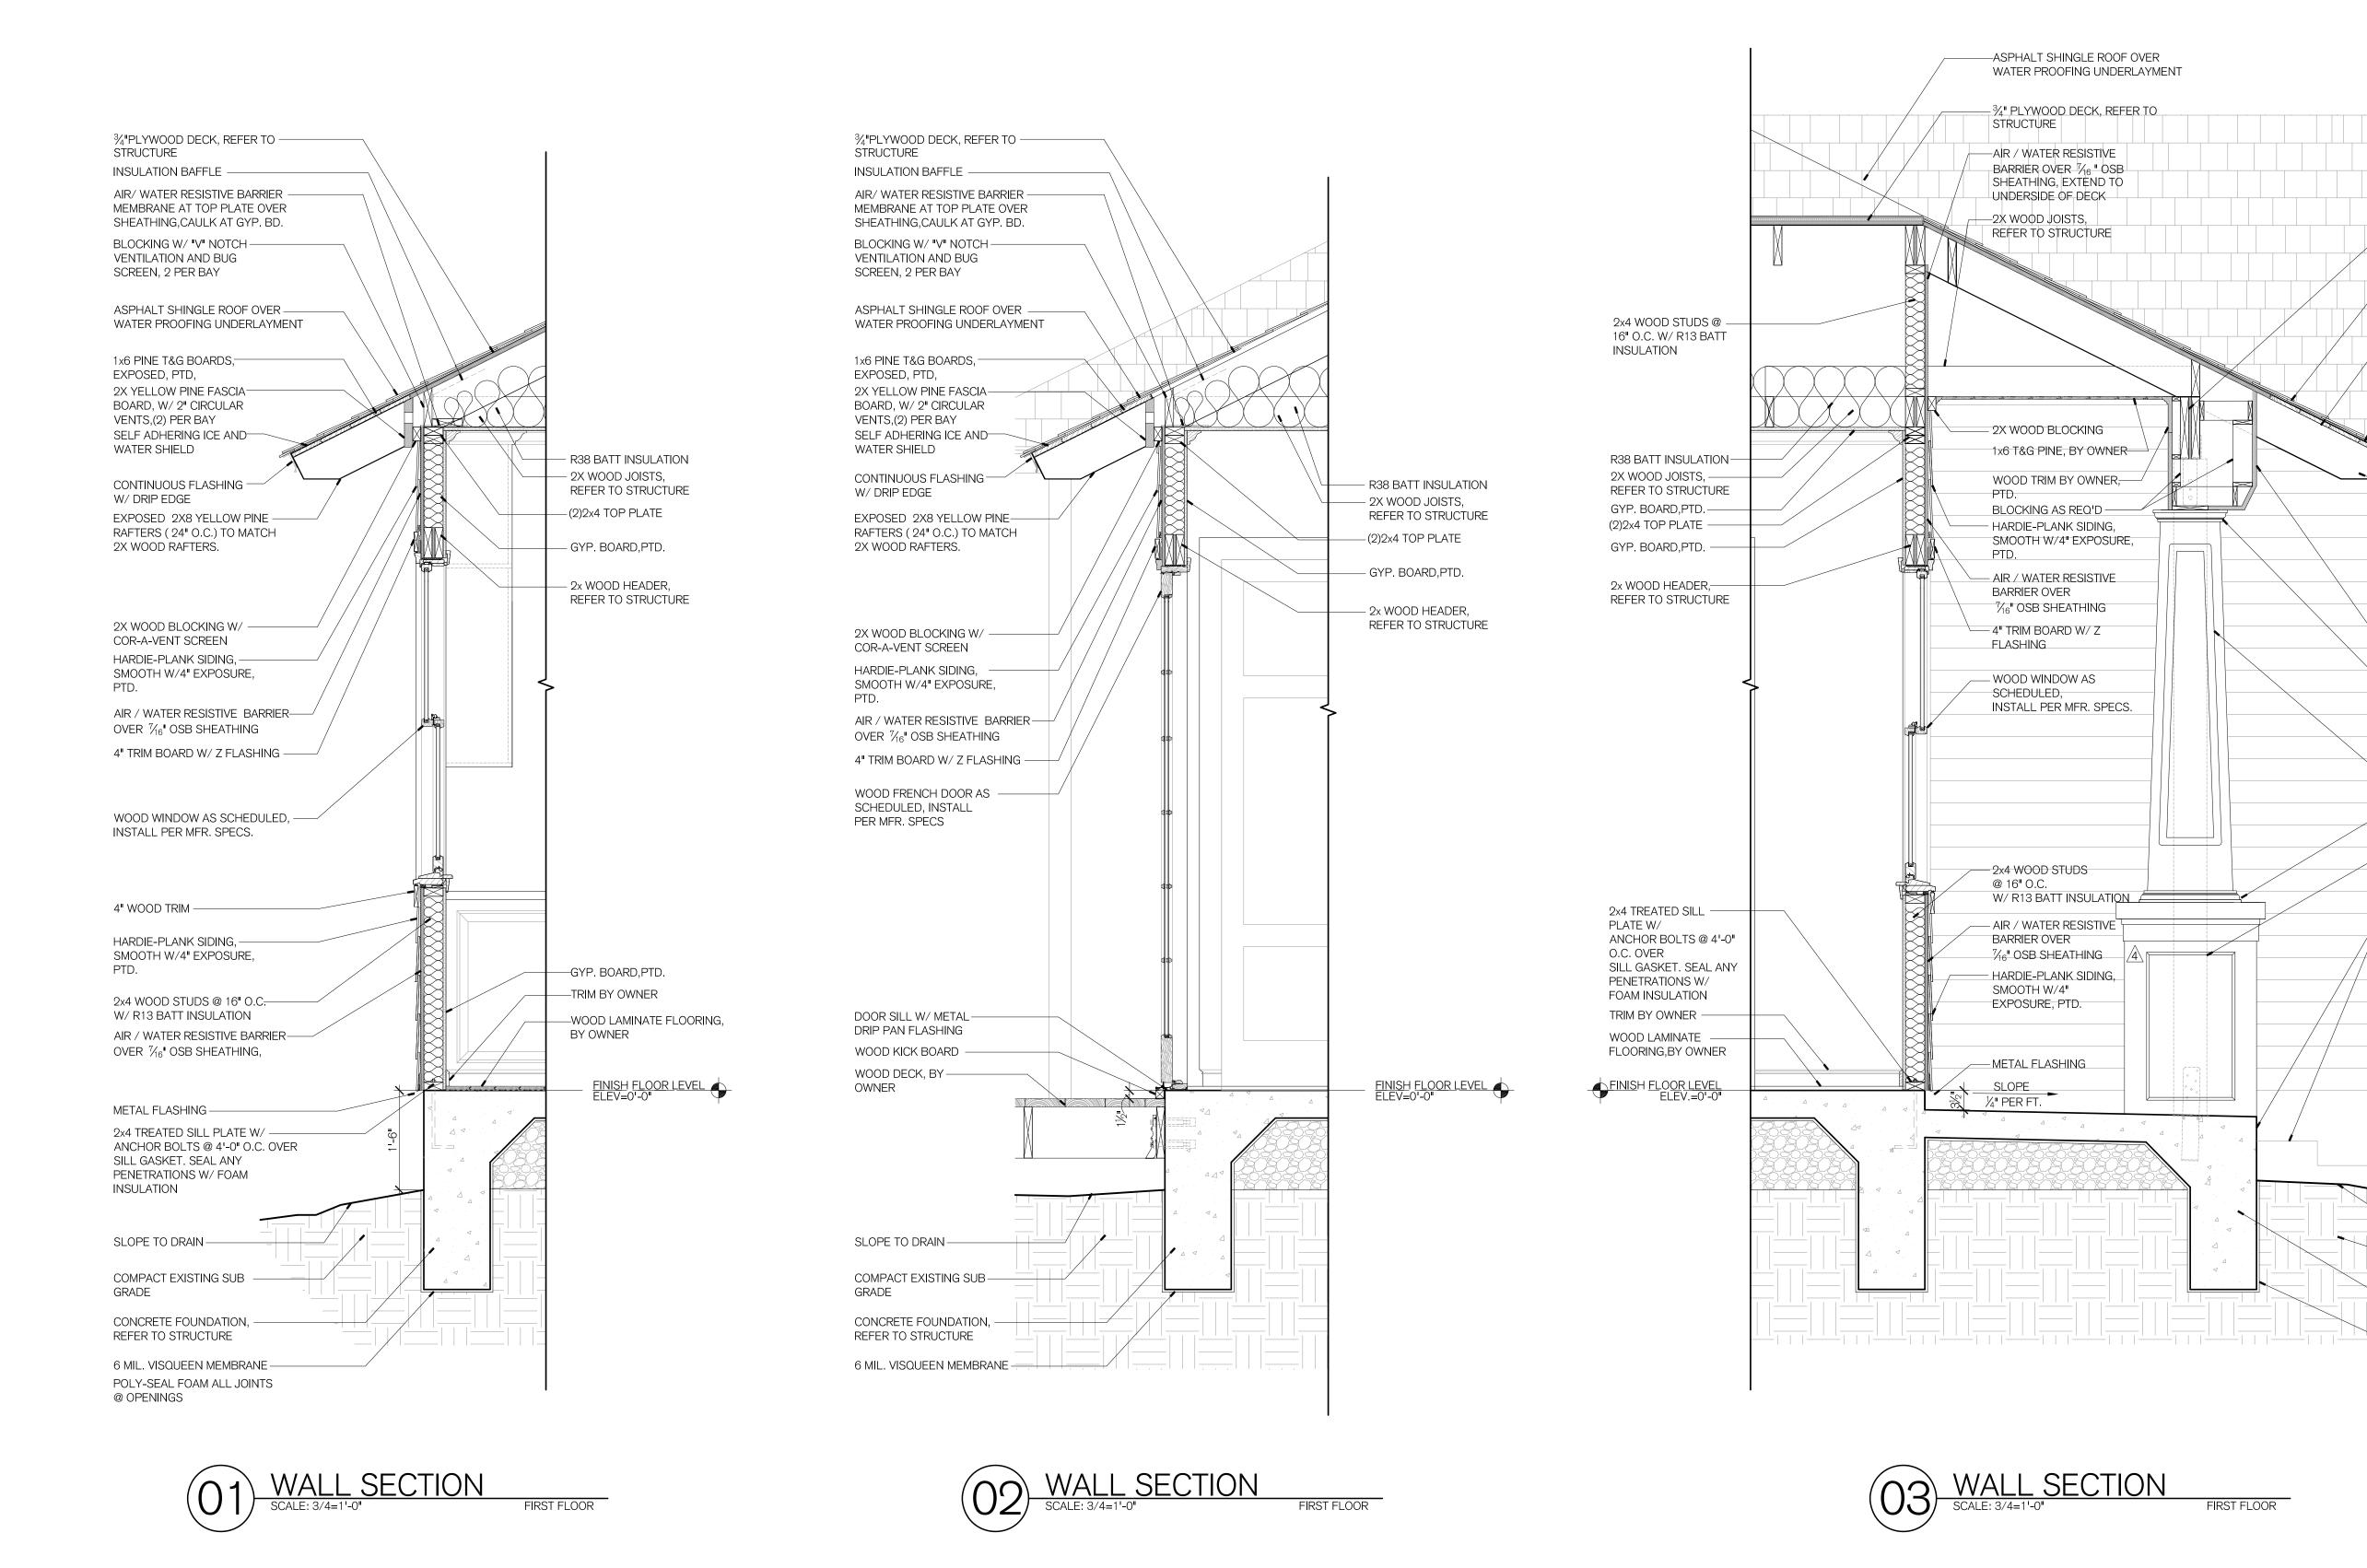



DATE 05 DECEMBER 2018

BARRAZA DESIGN 3830 SALTY MARSH, SAN ANTONIO, TEXAS 78215 VOICE: (210) 209-6127

THIS PLAN AND THE DESIGNS CONTAINED HEREIN ARE THE PROPERTY OF BARRAZA DESIGNS, LLC AND HECTOR BARRAZA AND MAY NOT BE REPRODUCED. ALL OR IN PART, WITHOUT WRITTEN CONSENT FROM HECTOR BARRAZA BARRAZA DESIGN, LLC IS A DESIGN FIRM, NOT AN ENGINEERING FIRM. WE DO NOT QUALIFY TO BE ONE NOR ARE WE LICENSED TO DESIGN STRUCTURAL FRAMING, WIND BRACING OR FOUNDATIONS. A LICENSED PROFESSIONAL ENGINEER SHOULD BE CONTRACTED AND CONSULTED IMMEDIATELY REGARDING FRAMING, WIND BRACING AND THE FOUNDATION DESIGNS. SHOULD AN ENGINEER'S SEAL BE PRESENT ON THESE DRAWINGS, THE "ENGINEER OF RECORD" SHALL BEAR ALL RESPONSIBILITY FOR THE STRUCTURE, WINTERPACED FOR THE STRUCTURE OF THE ST

DESIGN IN ANY WAY MATTER OR FORM IF ANY ISSUES OR PROBLEMS AF

PROJECT

- WOOD BEAM, REFER TO

1x6 PINE T&G BOARDS,

SELF ADHERING ICE AND

- CONTINUOUS FLASHING

2X WOOD RAFTERS.

WOOD TRIM BY OWNER,

WOOD MOULDING BY OWNER,

WOOD COLUMN WRAP BY OWNER,

- CONCRETE PORCH & STAIRS, REFER

WOOD MOULIDNG BY OWNER,

6X6 WOOD COLUMN WITH WOOD BASE WRAP ,PTD.

TO STRUCTURE

- SLOPE TO DRAIN

GRADE

COMPACT EXISTING SUB

CONCRETE FOUNDATION, REFER TO STRUCTURE

6 MIL. VISQUEEN MEMBRANE

EXPOSED 2X8 YELLOW PINE

RAFTERS (24" O.C.) TO MATCH

W/ DRIP EDGE

EXPOSED, PTD,

WATER SHIELD

ASPHALT SHINGLE ROOF OVER

WATER PROOFING UNDERLAYMENT

STRUCTURE

Residence

424. N. Olive San Antonio, TX, 78202

OWNER

Cy Goudge 305 Castano Ave. San Antonio, Texas, 78209

ROJECT NUMBER

104 424. N. Olive

CONSTRUCT. DOCS.

NO. DATE DESCRIPTION OF ISSUE

1 12/5/2018 COSA Permit Set

.....

CONSULTAN


WALL SECTIONS

05 DECEMBER 2018


SHEET NUMBER

KEY NOTES:


- MICROWAVE BY OWNER
- REFRIGERATOR
- 30" GAS COOK-TOP
- GRANITE TOP & BACKSPLASH DISHWASHER, BY OWNER
- PENDANT LIGHTS FRAMED MIRROR
- 8. FLOOR MOUNTED DUAL FLUSH TOILET
- 9. 36" APRON SINK, BY OWNER
- 10. 36" HIGH BAR TOP 11. SLIDING SHOWER DOOR (TEMPERED)

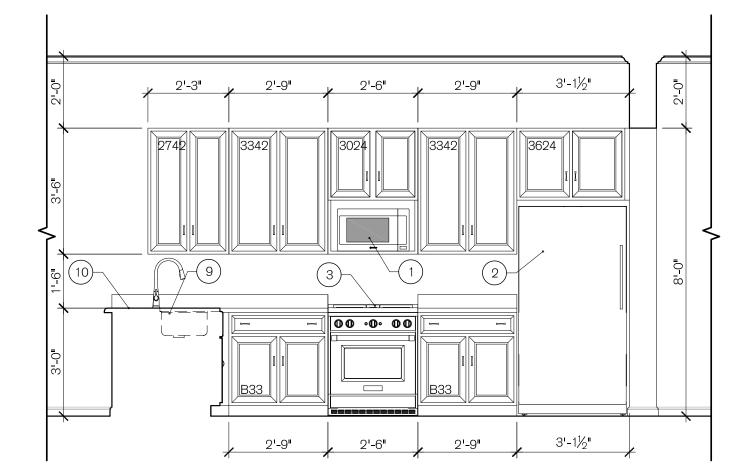


INTERIOR ELEVATION
SCALE: 3/8"=1'-0"
KITCHEN-

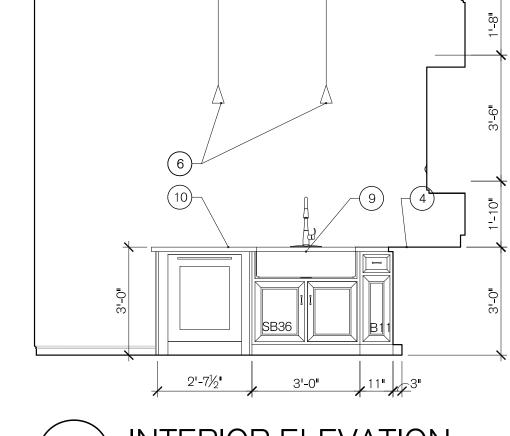



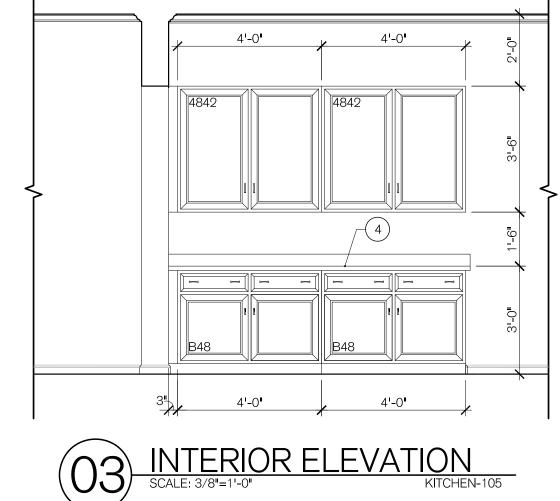

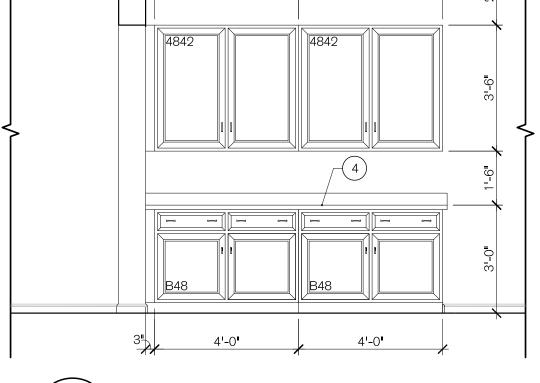



DATE 05 DECEMBER 2018

BARRAZA DESIGN 3830 SALTY MARSH, SAN ANTONIO, TEXAS 78215 VOICE: (210) 209-6127

THIS PLAN AND THE DESIGNS CONTAINED HEREIN ARE THE PROPERTY OF BARRAZA DESIGNS, LLC AND HECTOR BARRAZA AND MAY NOT BE REPRODUCED, ALL OR IN PART, WITHOUT WRITTEN CONSENT FROM HECTOR BARRAZA BARRAZA DESIGN, LLC IS A DESIGN FIRM, NOT AN ENGINEERING FIRM. WE DO NOT QUALIFY TO BE ONE NOR ARE WE LICENSED TO DESIGN STRUCTURAL FRAMING, WIND BRACING OR FOUNDATIONS. A LICENSED PROFESSIONAL ENGINEER SHOULD BE CONTRACTED AND CONSULTED IMMEDIATELY REGARDING FRAMING, WIND BRACING AND THE FOUNDATION DESIGNS. SHOULD AN ENGINEER'S SEAL BE PRESENT ON THESE DRAWINGS, THE "ENGINEER OF RECORD" SHALL BEAR ALL RESPONSIBILITY FOR THE STRUCTURE, WIND BRACING AND FOUNDATION DESIGNS FOR THIS PROJECT. BARRAZA DESIGN, & HECTOR BARRAZA ARE NOT TO BE HELD RESPONSIBLE FOR THE STRUCTURAL DESIGN IN ANY WAY MATTER OR FORM IF ANY ISSUES OR PROBLEMS ARISE.

PROJECT

Residence

424. N. Olive San Antonio, TX, 78202

OWNER

Cy Goudge 305 Castano Ave.

San Antonio, Texas, 78209

104 424. N. Olive


CONSTRUCT. DOCS.


NO. DATE DESCRIPTION OF ISSUE

1 12/5/2018 COSA Permit Set

INTERIOR ELEVATIONS

05 DECEMBER 2018

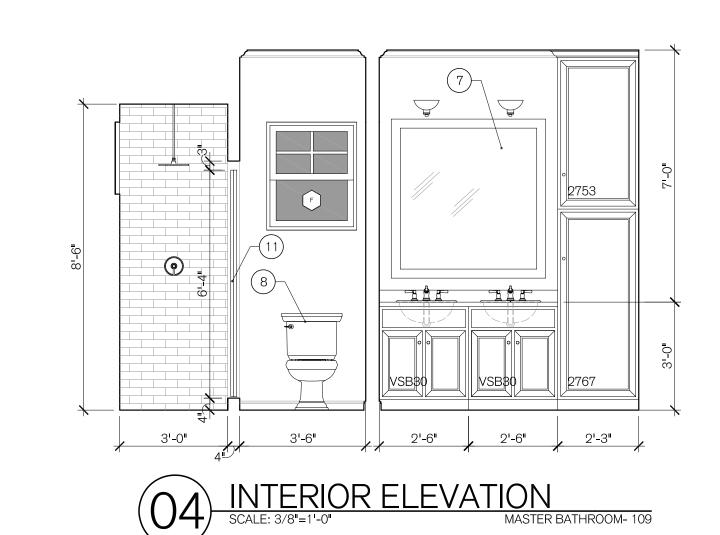

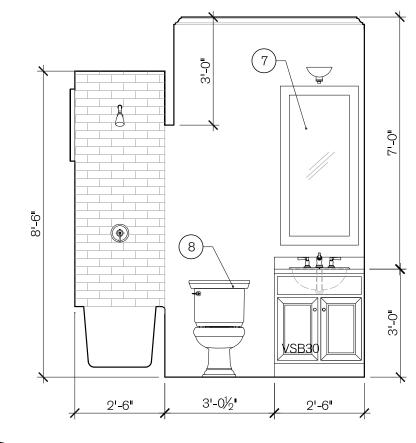

O5 INTERIOR ELEVATION

SCALE: 3/8"=1'-0" BATHROOM- 104

