#### HISTORIC AND DESIGN REVIEW COMMISSION February 19, 2020

HDRC CASE NO: 2020-053

**ADDRESS:** 815, 825, 827, 835, 841 E ASHBY PLACE

**LEGAL DESCRIPTION:** NCB 3053 BLK LOT 11, 12, 13 & 14 (4.635 AC) & P-100 (0.142 AC) & P-101

(0.3304 AC) TOTAL: 5.1074 AC

**ZONING:** IDZ-3, RIO-2

CITY COUNCIL DIST.: 1

**APPLICANT:** Ashley Kaufman/Kaufman & Killen, Inc.

**OWNER:** BORDEN RIVER ROAD LP

**TYPE OF WORK:** Construction of a multi-story, multi-family residential structure

APPLICATION RECEIVED: January 31, 2020 60-DAY REVIEW: March 31, 2020 CASE MANAGER: Edward Hall

**REOUEST:** 

The applicant is requesting a Certificate of Appropriateness for approval to construct a 6-story, multi-family residential structure on the lots addressed as 815, 825, 827, 835 and 841 E Ashby Place. Within this proposed development, the applicant has also proposed to perform landscaping and river beautification improvements, trail improvements and low impact development features along the San Antonio River. The proposed new construction will feature 338 residential units.

#### **APPLICABLE CITATIONS:**

UDC Section 35-672. – Neighborhood Wide Design Standards

- (a) Pedestrian Circulation. Pedestrian access shall be provided among properties to integrate neighborhoods.
  - (1) Provide sidewalks that link with existing sidewalks on adjoining properties If no sidewalk currently exists on an adjoining property, the applicant will have discretion in the placement of the sidewalk provided the following criteria are met:
    - A. Provide a sidewalk connection from one (1) side of the applicant's property to the other, parallel to the public right-of way, on the street sides of the property in all river improvement overlay districts
    - B. Provide a connection from the street level sidewalk to the Riverwalk at cross streets and bridges and other designated access points. This requirement may be waived if there is already a public connection from the street level to the Riverwalk.
    - C. In order to preserve the rural character of "RIO-6," the HPO, in coordination with the development services department, may waive the requirement of sidewalks.
      - In "RIO-3," the width of the pathway along the river shall match those widths established in the historic Hugman drawings. If there are no sidewalks in the Hugman drawings, the path will not exceed eight (8) feet in width.
  - (2) Link the various functions and spaces on a site with sidewalks in a coordinated system.

Provide pedestrian sidewalks between buildings, parking areas and built features such as outdoor plazas and courtyards.

- (3) Paving materials. Paving materials for pedestrian pathways shall use visually and texturally different materials than those used for parking spaces and automobile traffic.
  - A. Paving materials for pedestrian pathways shall be either:
    - i. Broom-finished, scored, sandblasted or dyed concrete;
    - ii. Rough or honed finished stone;
    - iii. Brick or concrete pavers; or
    - iv. Other materials that meet the performance standards of the above materials.
  - B. Asphalt is permitted for pedestrian pathways that also are designated as multi-use paths by the City of San Antonio. The public works department will maintain the designated multi-use path locations.
- (4) Street Connections to River. Retain the interesting and unique situations where streets dead-end at the river, creating both visual and physical access to the river for the public.
- (5) Pedestrian Access Along the Riverwalk Pathway Shall Not Be Blocked.

- A. Queuing is prohibited on the Riverwalk pathway.
- B. Hostess stations shall be located away from the Riverwalk pathway so as to not inhibit pedestrian flow on the Riverwalk pathway. That is, the hostess station shall not be located in such a manner to cause a patron who has stopped at the hostess stand to be standing on the Riverwalk pathway. Pedestrian flow shall be considered "inhibited" if a pedestrian walking along the pathway has to swerve, dodge, change direction or come to a complete stop to avoid a patron engaged at the hostess stand.
- C. Tables and chairs shall be located a sufficient distance from the Riverwalk pathway so that normal dining and service shall not inhibit the flow of pedestrian traffic. See inhibited definition in subsection B. above.
- (b) Automobile Access and Parking. Automobile circulation should be efficient, and conflicts with pedestrians minimized. Entry points for automobiles should be clearly defined and connections to auto circulation on adjoining properties are encouraged to facilitate access and reduce traffic on abutting public streets.
  - (1) Curb Cuts.
    - A. Limit curb cuts to two (2) on parking areas or structures facing only one (1) street, and one (1) for each additional street face. The prohibition of additional curb cuts may be waived by the HDRC where the intent of the standards are clearly met and specific site circulation patterns require an additional curb cut, such as on long parcels or at nodes.
    - B. Curb cuts may be no larger than twenty-five (25) feet zero (0) inches. Continuous curb cuts are prohibited.
    - C. Sharing curb cuts between adjacent properties, such as providing cross property access easements, is permitted.
  - (2) Location of Parking Areas. Automobile parking in new developments must be balanced with the requirements of active environments. Large expanses of surface parking lots have a negative impact on street activity and the pedestrian experience. New commercial and residential structures can accommodate parking needs and contribute to a pedestrian-friendly streetscape.
    - A. Locate parking areas, that is any off-street, ground level surface used to park cars or any parking structure, toward the interior of the site or to the side or rear of a building.
    - B. The extent of parking area that may be located along the street edge or riverside shall be limited to a percentage of the lot line as per Table 672-1 as measured in a lineal direction parallel to the lot line. All parking within a thirty-foot setback from the above mentioned lot line shall comply with the requirements of the table. Where parking is located on corner sites only one (1) lot line has to meet the requirements of the table.
    - C. Parking lots should be avoided as a primary land use. Parking lots as a primary use are prohibited in RIO-3 and for all properties that fall within one hundred (100) feet of the river right-of-way in all RIO districts.
  - (3) Screen or Buffer Parking Areas From View of Public Streets, the River or Adjacent Residential Uses. (see Figure 672-2). Parking lots shall be screened with a landscape buffer as per the illustrations of bufferyards and Table 510-2 if the parking area meets one (1) of the following conditions:
    - A. Within a fifty-foot setback from the edge of the river ROW use, at a minimum, type E; or
    - B. Within a twenty-foot setback from a property line adjacent to a street use, at a minimum, type B; or
    - C. Within a twenty-foot setback of commercial or industrial property that abuts a residential property use, at a minimum, type C.
  - (4) Parking Structures Shall Be Compatible With Buildings in the Surrounding Area. Parking garages should have retail space on the ground floor of a parking structure provided the retail space has at least fifty (50) percent of its linear street frontage as display windows. Parking structures may be made visually appealing with a mural or public art component approved by the HDRC on the parking structure. A parking garage will be considered compatible if:
    - A. It does not vary in height by more than thirty (30) percent from another building on the same block face; and B. It uses materials that can be found on other buildings within the block face, or in the block face across the
  - (5) Parking Structures Shall Provide Clearly Defined Pedestrian Access. Pedestrian entrances and exits shall be accentuated with directional signage, lighting or architectural features so that pedestrians can readily discern the appropriate path of travel to avoid pedestrian/auto conflicts.
  - (6) Parking lots, structures, and hardscape shall not drain directly into the river without installation of appropriate water quality best management practices (WQ BMPs). Acequias shall not be used for any type of drainage.
- (c) Views. The river's course (both natural and manmade), and San Antonio's street pattern, creates unique views of certain properties from the public ROW. These properties often occur at prominent curves in the river or where a street changes direction and a property appears to be a terminus at the end of a street.
  - (1) Architectural Focal Point. When a property is situated in such a manner as to appear to be the terminus at the end of the street or at a prominent curve in the river, the building shall incorporate into its design an architectural feature that will provide a focal point at the end of the view. (see Figure 672-3) An architectural feature will be

considered to be a focal point through any of the following methods, but not limited to:

- A. Additional height.
- B. Creation of a tower.
- C. Variation in roof shape.
- D. Change of color or materials.
- E. Addition of a design enhancement feature such as:
  - i. Embellished entrance areas.
  - ii. Articulated corners, especially when entrance is at corner, rounded or chamfered corners ease the transitions from one street facade to the adjoining facade.
  - iii. Recessed or projecting balconies and entrances.
  - Billboards, advertising and signage are expressly prohibited as appropriate focal points.

#### UDC Section 35-673. – Site Design Standards

- (a) Solar Access. The intent of providing and maintaining solar access to the San Antonio River is to protect the river's specific ecoclimate. The river has a special microclimate of natural and planted vegetation that requires certain levels and balanced amounts of sunlight, space and water. Development must be designed to respect and protect those natural requirements, keeping them in balance and not crowding or altering them so that vegetation does not receive more or less space and water, but particularly sunlight, than is required for normal expected growth.
  - (1) Building Massing to Provide Solar Access to the River. Building massing shall be so designed as to provide direct sunlight to vegetation in the river channel as defined:
    - A. The area to be measured for solar access shall be a thirty-foot setback from the river's edge or from the river's edge to the building face, which ever is lesser, parallel to the river for the length of the property.
    - B. The solar calculations shall be measured exclusive to the applicant's property; that is, shades and shadows of other buildings shall not be included in the calculations. The solar calculations shall only measure the impact of new construction and additions. The shading impact of historic buildings on the site may be excluded from the calculations.
    - C. The defined area shall receive a minimum of 5.5 hours of direct sunlight, measured at the winter solstice, and 7.5 hours of direct sunlight, measured at the summer solstice.
    - D. Those properties located on the south side of the river (whose north face is adjacent to the river) shall only be required to measure the sunlight in the 30-foot setback on the opposite bank of the river.
    - E. Those properties within the river improvement overlay district not directly adjacent to the river are still subject to the provisions of this section. To determine the solar access effect of these buildings on the river the applicant must measure the nearest point to the river of an area defined by a thirty-foot setback from the river's edge, parallel to the river for the length of their property that would be affected by their building. For those buildings on the south side of the river, the 30-foot setback shall be measured only on the opposite bank.
    - F. However, in those cases where the above conditions cannot be met due to the natural configuration of the river, existing street patterns, or existing buildings, the HDRC may approve a buildings mass and height as allowed by table 674-2.
    - G. If there is a conflict with this section and another section of this chapter this section shall prevail.
  - (2) Prohibition of Structures, Buildings, Roofs or Skywalks Over the River Channel. No structure, building, roof or skywalk may be constructed over the river channel, or by-pass channel with the exception of structures for flood control purposes, open air pedestrian bridges at ground or river level, and street bridges. The river channel is the natural course of the river as modified for flood control purposes and the Pershing-Catalpa ditch.
- (b) Building Orientation. Buildings should be sited to help define active spaces for area users, provide pedestrian connections between sites, help animate the street scene and define street edges. Consideration to both the street and riverside should be given. The placement of a building on a site should therefore be considered within the context of the block, as well as how the structure will support the broader design goals for the area.
  - (1) Two or More Buildings on a Site.
    - A. Cluster buildings to create active open spaces such as courtyards along the street and river edges. Site plazas and courtyards, if possible, so that they are shaded in the summer and are sunny in the winter.
  - (2) Primary and Secondary Entrances
    - A. Orient a building's primary entrance toward the street with subordinate entrances located on the riverside and/or the interior of the property. On a major thoroughfare street it is acceptable to provide the primary entrance through a common courtyard and then to a street.
    - B. The primary entrance shall be distinguished by architectural features such as, but not limited to: an entry

portal; change in material or color; change in scale of other openings; addition of columns, lintels or canopies. C. Secondary entrances shall have architectural features that are subordinate to the primary entrance in scale and detail. For purposes of this division subordinate means that the entrance is smaller in height and width, and has fewer or simpler architectural elements.

- (c) Topography and Drainage. The natural contours of occasional hillsides and riverbanks contribute to the distinct character of the San Antonio River and shall be considered in site designs for new development. Site plans shall minimize the need for cut and fill. It should be considered as an opportunity for positive enhancements through the creative use of terraces and retaining walls.
  - (1) Visual Impacts of Cut and Fill. Divide a grade change of more than ten (10) vertical feet into a series of benches and terraces. Terrace steep slopes following site contours. When creating site benches, using sloped "transitional areas" as part of the required landscaping is appropriate.
  - (2) Minimize the Potential for Erosion at the Riverbank. Grade slopes at a stable angle not to exceed four to one (4:1) and provide plant material that will stabilize the soil such as vigorous ground covers, vines or turf planting that are native and noninvasive species as found on the permissible plant list maintained by the parks and recreation department. Use of stabilizing materials such as geo-web or geo-grid is permitted as long as plant material is used to conceal the grid.

Use of terraced walls is permitted when there is a slope of more than four to one (4:1).

- (3) Retaining Walls. Limit the height of a retaining wall to less than six (6) feet. If the retaining wall must exceed six
- (6) feet, a series of six-foot terrace walls is acceptable. Walls at dams and locks are excluded from this requirement. If in the opinion of the historic preservation officer a higher wall is consistent with the adopted conceptual plan of the river, a higher wall (not to exceed twelve (12) feet) is allowed. Materials used for the walls may include limestone, stucco, brick, clay, tile, timber, or textured concrete. (see Figure 673-2)
- (4) Enhance or Incorporate Acequias Into The Landscape Design and Drainage Scheme of the Site. Where archeological evidence indicates a site contains or has contained a Spanish colonial acequia, incorporate the original path of the acequia as a natural drainageway or a landscape feature of the site by including it as part of the open space plan, and a feature of the landscape design.
- (5) Design of Stormwater Management Facilities to be a Landscape Amenity. Where above ground stormwater management facilities are required, such facilities shall be multi-purpose amenities. For example, water quality features can be included as part of the site landscaping and detention facilities can be included as part of a hardscape patio. Using an open concrete basin as a detention pond is prohibited.
- (6) Walls and Fences at Detention Areas.
  - A. When the topography of the site exceeds a four to one (4:1) slope and it becomes necessary to use a masonry wall as part of the detention area, use a textured surface and incorporate plant materials, from the plant list maintained by the parks department, that will drape over the edge to soften the appearance of the structure.
  - B. The use of solid board or chain link fence with or without slats is prohibited. A welded wire, tubular steel, wrought iron or garden loop is permitted.
- (7) Roof Drainage into the River.
  - A. All roof drainage and other run-off drainage shall conform to public works department standards so that they \ drain into sewer and storm drains rather than the river. Drainage of this type shall not be piped into the river unless the outlet is below the normal waterline of the river at normal flow rates.
  - B. All downspouts or gutters draining water from roofs or parapets shall be extended underground under walks and patios to the San Antonio River's edge or stormwater detention facility so that such drainage will not erode or otherwise damage the Riverwalk, landscaping or river retaining walls.
  - C. All piping and air-conditioning wastewater systems shall be kept in good repair. Water to be drained purposely from these systems, after being tested and adjudged free from pollution, shall be drained in the same manner prescribed in subsection (7)A. above.
- (d) Riverside Setbacks. Riverside setbacks for both buildings and accessory structures are established to reinforce the defined character of the specific river improvement overlay district and help to define an edge at the river pathway that is varied according to the relationship of the river and the street. In the more urban areas, buildings should align closer to the river edge, while in more rural areas the buildings should be set farther away.
  - (1) Minimum setback requirements are per the following Table 673-1.

Description	RIO-1	RIO-2	RIO-3	RIO-4	RIO-5	RIO-6
Riverside Setback	20 FT	15 FT	0 FT	20 FT	50 ft	100 FT

- (e)Landscape Design. Lush and varied landscapes are part of the tradition of the San Antonio River. These design standards apply to landscaping within an individual site. Additional standards follow that provide more specific standards for the public pathway along the river and street edges.
  - (1)Provide Variety in Landscape Design. Provide variety in the landscape experience along the river by varying landscape designs between properties. No more than seventy-five (75) percent of the landscape materials, including plants, shall be the same as those on adjacent properties. (see Figure 673-4).
  - (2) Planting Requirements in Open Space Abutting the River. On publicly-owned land leased by the adjoining property owner, if applicable, and/or within privately owned setbacks adjacent to the river, a minimum percentage of the open space, excluding building footprint, lease space under bridges and parking requirements, are required to be planted according to Table 673-2.
    - A. Planting requirements in RIO-4, RIO-5, and RIO-6 should continue the restoration landscape efforts along the river banks. Planting in these RIO districts is to be less formal so as to maintain the rural setting of the river. B. In "RIO-3," if existing conditions don't meet the standards as set out in Table 673-2, the owner or lessee will not have to remove paving to add landscaping in order to meet the standards until there is a substantial remodeling of the outdoor area. Substantial remodeling will include replacement of seventy-five (75) percent of the paving materials, or replacement of balcony and stair structures.
- (f) Plant Materials. A number of soil conditions converge in the San Antonio area to create unique vegetation ecosystems. Along the route of the San Antonio River, the soil conditions vary greatly from the northern boundary near Hildebrand to the city limits near Mission San Francisco de la Espada (Mission Espada) and therefore native and indigenous plants will vary accordingly. Landscaping should reflect the unique soil characteristics of the specific site.
  - (1) Incorporate Existing Vegetation. Extend the use of landscape materials, including plants, shrubs and trees that are used in the public areas of the river onto adjacent private areas to form a cohesive design.
  - (2) Use indigenous and noninvasive species characteristic of the specific site as found on the permissible plant list maintained by the parks and recreation department or the Unified Development Code Plant List found in Appendix E. In "RIO-3," plantings of tropical and semi-tropical plants with perennial background is permitted.
  - (3) Install Trees to Provide Shade and to Separate Pedestrians From Automobile Traffic. Install street trees along the property line or in the ROW abutting all streets according to minimum requirement standards established in subsection 35-512(b), except where this conflicts with existing downtown Tri-Party improvements in "RIO-3." In "RIO-3" the owner has the option of placing trees at the property line, or along the street edge.
- (g) Paving Materials. An important San Antonio landscape tradition is the use of decorative surfaces for paving and other landscape structures. Paving materials and patterns should be carefully chosen to preserve and enhance the pedestrian experience.
  - (1) Vary Walkway, Patio and Courtyard Paving to Add Visual Interest on the Riverside of Properties Abutting the River. Pervious paving is encouraged where feasible and appropriate to the site.
    - A. A maximum of six hundred (600) square feet is allowed for a single paving material before the paving material must be divided or separated with a paving material that is different in texture, pattern, color or material. A separation using a different material must be a minimum of twenty-four (24) inches wide, the full width of the pathway.
    - B. A maximum of one hundred (100) lineal feet is allowed in a walkway before the pattern must change in districts "RIO-2," "RIO-3," and "RIO-4." A maximum of five hundred twenty-eight (528) lineal feet is allowed before the pattern must change in districts "RIO-1," "RIO-5" and "RIO-6." The change of material at five hundred twenty-eight (528) lineal feet will define and delineate one-tenth-mile markers.
    - C. In "RIO-3," the Riverwalk pathway shall be delineated by using a separate material that is clearly distinguished from the adjacent patio paving materials. If the historic Hugman drawings indicate a sidewalk width and pattern on the site, that paving pattern and material shall be replicated.
- (h) Site Walls and Fences. Site walls and fences are used to help divide spaces, screen unsightly objects and provide privacy. However, the character of the San Antonio River is such that walls shall not be erected in such a way as to block views of the river from public spaces.
  - (1) Use of Site Walls to Define Outdoor Spaces.
    - A. Use of low scale walls (twenty-four (24) inches to forty-eight (48) inches) to divide space, create a variety in landscaping and define edges is permitted.
    - B. Solid walls (up to seventy-two (72) inches) are permitted to: screen mechanical equipment, garbage receptacles and other unsightly areas; and provide privacy at the back of lots up to the front building face.
  - (2) Site Wall and Fence Materials.
    - A. On properties abutting the river, site walls and fence materials may be constructed of: stone, block, tile, stucco, wrought iron, tubular steel, welded wire or a combination of masonry and metal, cedar posts and

welded wire or garden loop or other materials having similar characteristics. All other properties, not abutting the river may use the above listed materials plus wood fencing.

- B. All chain link fences are prohibited for properties abutting the river. For properties that do not abut the river chain link is only allowed in the rear yard if not readily visible from the right-of-way. Barbed wire, razor wire, and concertina are prohibited in all RIO districts.
- (i) Street Furnishings. Street furnishings are exterior amenities, including but not limited to, tables, chairs, umbrellas, landscape pots, wait stations, valet stations, bicycle racks, planters, benches, bus shelters, kiosks, waste receptacles and similar items that help to define pedestrian use areas. Handcrafted street furnishings are particularly important in San Antonio, and therefore this tradition of craftsmanship and of providing street furniture is encouraged.
  - (1) Prohibited Street Furnishings in Riverwalk Area. The following street furnishings are prohibited within the publicly owned portion of the Riverwalk area, whether or not the property is leased, and on the exterior of the riverside of buildings directly adjacent to the publicly owned portion of the river:
    - A. Vending machines.
    - B. Automatic teller machines.
    - C. Pay phones.
    - D. Photo booths.
    - E. Automated machines such as, but not limited to, penny crunching machines, blood pressure machines, fortune-telling machines, video games, animated characters and other machines that are internally illuminated, or have moving parts, or make noise, or have flashing lights.
    - F. Inanimate figures such as horses, kangaroos, bears, gorillas, mannequins or any such animal, cartoon or human figure. This section does not affect public art as defined in Appendix "A" of this chapter.
    - G. Monitors (i.e., television screens, computer screens).
    - H. Speakers.
  - (2) Street Furnishing Materials.
    - A. Street furnishings shall be made of wood, metal, stone, terra cotta, cast stone, hand-sculpted concrete, or solid surfacing material, such as Corian or Surell.
    - B. Inexpensive plastic resin furnishings are prohibited.
  - (3) Advertising on Street Furnishings.
    - A. No commercial logos, trademarks, decals, product names whether specific or generic, or names of businesses and organizations shall be allowed on street furnishings.
    - B. Product or business advertising is prohibited on all street furnishings.
    - C. Notwithstanding the restrictions above, applications may be approved for purposes of donor or non-profit recognition.
  - (4) Street furnishings, such as tables and chairs may not be stored (other than overnight storage) in such a way as to be visible from the river pathway.
- (j) Lighting. Site lighting should be considered an integral element of the landscape design of a property. It should help define activity areas and provide interest at night. At the same time, lighting should facilitate safe and convenient circulation for pedestrians, bicyclists and motorists. Overspill of light and light pollution should be avoided.
  - (1) Site Lighting. Site lighting shall be shielded by permanent attachments to light fixtures so that the light sources are not visible from a public way and any offsite glare is prevented.
    - A. Site lighting shall include illumination of parking areas, buildings, pedestrian routes, dining areas, design features and public ways.
    - B. Outdoor spaces adjoining and visible from the river right-of-way shall have average ambient light levels of between one (1) and three (3) foot-candles with a minimum of 0.5-foot candles and a maximum of six (6) foot-candles at any point measured on the ground plane. Interior spaces visible from the river right-of-way on the river level and ground floor level shall use light sources with no more than the equivalent lumens of a one hundred-watt incandescent bulb. Exterior balconies, porches and canopies adjoining and visible from the river right-of-way shall use light sources with the equivalent lumens of a sixty-watt incandescent bulb with average ambient light levels no greater than the lumen out put of a one hundred-watt incandescent light bulb as long as average foot candle standards are not exceeded. Accent lighting of landscape or building features including specimen plants, gates, entries, water features, art work, stairs, and ramps may exceed these standards by a multiple of 2.5. Recreational fields and activity areas that require higher light levels shall be screened from the river hike and bike pathways with a landscape buffer.
    - C. Exterior light fixtures that use the equivalent of more than one hundred-watt incandescent bulbs shall not emit a significant amount of the fixture's total output above a vertical cut-off angle of ninety (90) degrees. Any structural part of the fixture providing this cut-off angle must be permanently affixed.

- D. Lighting spillover to the publicly owned areas of the river or across property lines shall not exceed one-half (½) of one (1) foot-candle measured at any point ten (10) feet beyond the property line.
  - (2) Provide Lighting for Pedestrian Ways That is Low Scaled for Walking. The position of a lamp in a pedestrian-way light shall not exceed fifteen (15) feet in height above the ground.
  - (3) Light Temperature and Color.
- A. Light temperature and color shall be between 2500° K and 3500° K with a color rendition index (CRI) of eighty (80) or higher, respectively. This restriction is limited to all outdoor spaces adjoining and visible from the river right-of-way and from the interior spaces adjoining the river right-of-way on the river level and ground floor level. Levels shall be determined by product specifications.
- (4) Minimize the Visual Impacts of Exterior Building Lighting.
  - A. All security lighting shall be shielded so that the light sources are not visible from a public way.
  - B. Lighting (uplighting and downlighting) that is positioned to highlight a building or outdoor artwork shall be aimed at the object to be illuminated, not pointed into the sky.
  - C. Fixtures shall not distract from, or obscure important architectural features of the building. Lighting fixtures shall be a subordinate feature on the building unless they are incorporated into the over-all design scheme of the building.
- (5) Prohibited Lighting on the Riverside of Properties Abutting the River.
  - A. Flashing lights.
  - B. Rotating lights.
  - C. Chaser lights.
  - D. Exposed neon.
  - E. Seasonal decorating lights such as festoon, string or rope lights, except between November 20 and January 10.
  - F. Flood lamps.
- (6) Minimize the visual impacts of lighting in parking areas in order to enhance the perception of the nighttime sky and to prevent glare onto adjacent properties. Parking lot light poles are limited to thirty (30) feet in height, shall have a  $90^{\circ}$  cutoff angle so as to not emit light above the horizontal plane.
- (k) Curbs and Gutters.
  - (1) Construct Curb and Gutter Along the Street Edge of a Property.
    - A. Install curbs and gutter along the street edge at the time of improving a parcel.
    - B. In order to preserve the rural character of RIO-5 and RIO-6, the HPO in coordination with public works and the development services department may waive the requirement of curbs and gutters.
- (l) Access to Public Pathway Along the River. These requirements are specifically for those properties adjacent to the river to provide a connection to the publicly owned pathway along the river. The connections are to stimulate and enhance urban activity, provide path connections in an urban context, enliven street activity, and protect the ambiance and character of the river area.
  - (1) A stair, ramp or elevator connecting the publicly owned pathway at the river to private property along the river is allowed by right at the following locations:
    - A. At all street and vehicular bridge crossings over the river.
    - B. Where publicly owned streets dead end into the river.
    - C. Where the pedestrian pathway in the Riverwalk area is located at the top of bank and there is a two-foot or less grade change between the private property and the pathway.
  - (2) If there is a grade change greater than two (2) feet between the private property and the publicly owned pathway at the river then the following conditions apply:
    - A. Access to the publicly owned pathway is limited to one (1) connection per property, with the exception that connections are always allowed at street and vehicular bridge crossings. For example if one (1) property extends the entire block face from street crossing to street crossing the owner would be allowed three (3) access points if the distance requirements were met.
    - B. The minimum distance between access points shall be ninety-five (95) feet. Only street and vehicular bridge connections are exempted. Mid-block access points must meet this requirement.
    - C. Reciprocal access agreements between property owners are permitted.
  - (3) Clearly define a key pedestrian gateway into the site from the publicly owned pathway at the river with distinctive architectural or landscape elements.
    - A. The primary gateway from a development to the publicly owned pathway at the river shall be defined by an architectural or landscape element made of stone, brick, tile, metal, rough hewn cedar or hand-formed concrete or through the use of distinctive plantings or planting beds.

- (m) Buffering and Screening. The manner in which screening and buffering elements are designed on a site greatly affects the character of the river districts. In general, service areas shall be screened or buffered. "Buffers" are considered to be landscaped berms, planters or planting beds; whereas, more solid "screens" include fences and walls. When site development creates an unavoidable negative visual impact on abutting properties or to the public right-of-way, it shall be mitigated with a landscape design that will buffer or screen it.
  - (1) Landscape Buffers Shall be Used in the Following Circumstances: To buffer the edges of a parking lot from pedestrian ways and outdoor use areas, (such as patios, and courtyards), and as an option to screening in order to buffer service areas, garbage disposal areas, mechanical equipment, storage areas, maintenance yards, equipment storage areas and other similar activities that by their nature create unsightly views from pedestrian ways, streets, public ROWs and adjoining property.
  - (2) Screening Elements Shall be Used in the Following Circumstances: To screen service areas, storage areas, or garbage areas from pedestrian ways.
  - (3) Exceptions for Site Constraints. Due to site constraints, in all RIOs and specifically for "RIO-3" where there is less than ten (10) feet to provide for the minimum landscape berm, a screen may be used in conjunction with plantings to meet the intent of these standards. For example a low site wall may be combined with plant materials to create a buffer with a lesser cross sectional width.
  - (4) Applicable Bufferyard Types. Table 510-2 establishes minimum plant materials required for each bufferyard type. For purposes of this section, type C shall be the acceptable minimum type.
  - (5) Applicable Screening Fence and Wall Types. Screening fences and walls shall be subject to conditions of subsection 35-673(h), Walls and Fences.
- (n) Service Areas and Mechanical Equipment. Service areas and mechanical equipment should be visually unobtrusive and should be integrated with the design of the site and building. Noise generated from mechanical equipment shall not exceed city noise regulations.
  - (1) Locate service entrances, waste disposal areas and other similar uses adjacent to service lanes and away from major streets and the river.
    - A. Position utility boxes so that they cannot be seen from the public Riverwalk path, or from major streets, by locating them on the sides of buildings and away from pedestrian and vehicular routes. Locating them within interior building corners, at building offsets or other similar locations where the building mass acts as a shield from public view is preferred.
    - B. Orient the door to a trash enclosure to face away from the street when feasible.
    - C. Air intake and exhaust systems, or other mechanical equipment that generates noise, smoke or odors, shall not be located at the pedestrian level.
  - (2) Screening of service entrance shall be compatible with the buildings on the block face.
    - A. When it would be visible from a public way, a service area shall be visually compatible with the buildings on the block face.
    - B. A wall will be considered compatible if it uses the same material as other buildings on the block, or is painted a neutral color such as beige, gray or dark green or if it is in keeping with the color scheme of the adjacent building.
- (o) Bicycle Parking. On-site bicycle parking helps promote a long term sustainable strategy for development in RIO districts. Bicycle parking shall be placed in a well lit and accessible area. UDC bicycle parking requirements in UDC 35-526 can be met through indoor bicycle storage facilities in lieu of outdoor bike rack fixtures.

#### Sec. 35-674. Building Design Principles

(a) Architectural Character. A basic objective for architectural design in the river improvement overlay districts is to encourage the reuse of existing buildings and construction of new, innovative designs that enhance the area, and help to establish distinct identities for each of the zone districts. At the same time, these new buildings should reinforce established building traditions and respect the contexts of neighborhoods.

When a new building is constructed, it shall be designed in a manner that reinforces the basic character-defining features of the area. Such features include the way in which a building is located on its site, the manner in which it faces the street and its orientation to the river. When these design variables are arranged in a new building to be similar to those seen traditionally, visual compatibility results.

(b) Mass and Scale. A building shall appear to have a "human scale." In general, this scale can be accomplished by using familiar forms and elements interpreted in human dimensions. Exterior wall designs shall help pedestrians establish a sense of scale with relation to each building. Articulating the number of floors in a building can help to establish a building's scale, for example, and prevent larger buildings from dwarfing the pedestrian.

- (1) Express facade components in ways that will help to establish building scale.
  - A. Treatment of architectural facades shall contain a discernible pattern of mass to void, or windows and doors to solid mass. Openings shall appear in a regular pattern, or be clustered to form a cohesive design. Architectural elements such as columns, lintels, sills, canopies, windows and doors should align with other architectural features on the adjacent facades.
- (2) Align horizontal building elements with others in the blockface to establish building scale.
  - A. Align at least one (1) horizontal building element with another horizontal building element on the same block face. It will be considered to be within alignment if it is within three (3) feet, measured vertically, of the existing architectural element.
- (3) Express the distinction between upper and lower floors.
  - A. Develop the first floor as primarily transparent. The building facade facing a major street shall have at least fifty (50) percent of the street level facade area devoted to display windows and/or windows affording some view into the interior areas. Multi-family residential buildings with no retail or office space are exempt from this requirement.
- (4) Where a building facade faces the street or river and exceeds the maximum facade length allowed in Table 674-1 divide the facade of building into modules that express traditional dimensions.

A. The maximum length of an individual wall plane that faces a street or the river shall be as shown in Table 674-1.

Table 674-1

Description RIO-1 RIO-2 RIO-3 RIO-4 RIO-5 RIO-6 Maximum Facade Length 50 ft. 50 ft. 30 ft. 75 ft. 75 ft. 50 ft.

- B. If a building wall plane facing the street or river and exceeds the length allowed in Table 674-1, employ at least two (2) of the following techniques to reduce the perceived mass:
  - Change materials with each building module to reduce its perceived mass; or
  - Change the height with each building module of a wall plane. The change in height shall be at least ten (10) percent of the vertical height; or
  - Change the roof form of each building module to help express the different modules of the building mass; or
  - Change the arrangement of windows and other facade articulation features, such as, columns, pilasters or strap work, which divides large planes into smaller components.
- (5) Organize the Mass of a Building to Provide Solar Access to the River.
  - A. One (1) method of doing so is to step the building down toward the river to meet the solar access requirements of subsection 35-673(a).
  - B. Another method is to set the building back from the river a distance sufficient to meet the solar access requirements of subsection 35-673(a).
- (c) Height. Building heights vary along the river corridor, from one-story houses to high-rise hotels and apartments. This diversity of building heights is expected to continue. However, within each zone, a general similarity in building heights should be encouraged in order to help establish a sense of visual continuity. In addition, building heights shall be configured such that a comfortable human scale is established along the edges of properties and views to the river and other significant landmarks are provided while allowing the appropriate density for an area.
  - (1) The maximum building height shall be as defined in Table 674-2.
    - A. Solar access standards subsection 35-673(a), and massing standards subsection 35-674(b) also will affect building heights.

Table 674-2

Description RIO-1 RIO-2 RIO-3 RIO-4 RIO-5 RIO-6 Maximum # of Stories 5 10 None 7 5 4 Maximum Height in Feet 60 ft. 120 ft. None 84 ft. 60 ft. 50 ft.

(3)On the street-side, the building facade shall appear similar in height to those of other buildings found traditionally in the area

If fifty (50) percent of the building facades within a block face are predominantly lower than the maximum height

allowed, the new building facade on the street-side shall align with the average height of those lower buildings within the block face, or with a particular building that falls within the fifty (50) percent range. However, the remainder of the building may obtain its maximum height by stepping back fifteen (15) feet from the building face.

- (4) Designation of a development node provides for the ability to increase the building height by fifty (50) percent from the requirements set out in article VI.
- (d) Materials and Finishes. Masonry materials are well established as primary features along the river corridor and their use should be continued. Stucco that is detailed to provide a texture and pattern, which conveys a human scale, is also part of the tradition. In general, materials and finishes that provide a sense of human scale, reduce the perceived mass of a building and appear to blend with the natural setting of the river shall be used, especially on major structures.
  - (1) Use indigenous materials and traditional building materials for primary wall surfaces. A minimum of seventy-five (75) percent of walls (excluding window fenestrations) shall be composed of the following:
    - A. Modular masonry materials including brick, stone, and rusticated masonry block, tile, terra-cotta, structural clay tile and cast stone. Concrete masonry units (CMU) are not allowed.
    - B. Other new materials that convey the texture, scale, and finish similar to traditional building materials.
    - C. Stucco and painted concrete when detailed to express visual interest and convey a sense of scale.
    - D. Painted or stained wood in a lap or shingle pattern.
  - (2) The following materials are not permitted as primary building materials and may be used as a secondary material only:
    - A. Large expanses of high gloss or shiny metal panels.
    - B. Mirror glass panels. Glass curtain wall buildings are allowed in RIO-3 as long as the river and street levels comply with 35-674(d)(1) above.
  - (3) Paint or Finish Colors.
    - A. Use natural colors of indigenous building materials for properties that abut the Riverwalk area.
    - B. Use matte finishes instead of high glossy finishes on wall surfaces. Wood trim and metal trim may be painted with gloss enamel.
    - C. Bright colors may highlight entrances or architectural features.
- (e) Facade Composition. Traditionally, many commercial and multi-family buildings in the core of San Antonio have had facade designs that are organized into three (3) distinct segments: First, a "base" exists, which establishes a scale at the street level; second a "mid-section," or shaft is used, which may include several floors. Finally a "cap" finishes the composition. The cap may take the form of an ornamental roof form or decorative molding and may also include the top floors of the building. This organization helps to give a sense of scale to a building and its use should be encouraged. In order to maintain the sense of scale, buildings should have the same setback as surrounding buildings so as to maintain the street-wall pattern, if clearly established.

In contrast, the traditional treatment of facades along the riverside has been more modest. This treatment is largely a result of the fact that the riverside was a utilitarian edge and was not oriented to the public. Today, even though orienting buildings to the river is a high priority objective, it is appropriate that these river-oriented facades be simpler in character than those facing the street.

- (1) Street Facade. Buildings that are taller than the street-wall (sixty (60) feet) shall be articulated at the stop of the street wall or stepped back in order to maintain the rhythm of the street wall. Buildings should be composed to include a base, a middle and a cap.
  - A. High rise buildings, more than one hundred (100) feet tall, shall terminate with a distinctive top or cap. This can be accomplished by:
    - i. Reducing the bulk of the top twenty (20) percent of the building by ten (10) percent.
    - ii. By stepping back the top twenty (20) percent of the building.
    - iii. Changing the material of the cap.
  - B. Roof forms shall be used to conceal all mechanical equipment and to add architectural interest to the structure.
  - C. Roof surfaces should include strategies to reduce heat island effects such as use of green roofs, photo voltaic panels, and/or the use of roof materials with high solar reflectivity.
- (2) Fenestration. Windows help provide a human scale and so shall be proportioned accordingly.
  - D. Curtain wall systems shall be designed with modulating features such as projecting horizontal and/or vertical mullions.
- (3) Entrances. Entrances shall be easy to find, be a special feature of the building, and be appropriately scaled.
  - A. Entrances shall be the most prominent on the street side and less prominent on the river side.
  - B. Entrances shall be placed so as to be highly visible.
  - C. The scale of the entrance is determined by the prominence of the function and or the amount of use.
  - D. Entrances shall have a change in material and/or wall plane.

- E. Entrances should not use excessive storefront systems.
- (4) Riverside facade. The riverside facade of a building shall have simpler detailing and composition than the street facade.
  - A. Architectural details such as cornices, sills, lintels, door surrounds, water tables and other similar details should use simple curves and handcrafted detailing.
  - B. Stone detailing shall be rough hewn, and chiseled faced. Smooth faced stone is not permitted as the primary building material, but can be used as accent pieces.
  - C. Facades on the riverside shall be asymmetrical, pedestrian scale, and give the appearance of the back of a building. That is, in traditional building along the river, the backs of building were designed with simpler details, and appear less formal than the street facades.
- (g) Awnings, Canopies and Arcades. (See Figure 674-2) The tradition of sheltering sidewalks with awnings, canopies and arcades on commercial and multi-family buildings is well established in San Antonio and is a practice that should be continued. They offer shade from the hot summer sun and shelter from rainstorms, thereby facilitating pedestrian activity. They also establish a sense of scale for a building, especially at the ground level. Awnings and canopies are appropriate locations for signage. Awnings with signage shall comply with any master signage plan on file with the historic preservation officer for the property. Awnings and canopies installed at street level within the public right-of-way require licensing with the city's capital improvements management services (CIMS) department. Canopies, balconies and awnings installed at river level within the public right-of-way require licensing with the city's downtown operations department.
  - (1) If awnings, arcades and canopies are to be used they should accentuate the character-defining features of a building.
    - A. The awning, arcade or canopy shall be located in relationship to the openings of a building. That is, if there are a series of awnings or canopies, they shall be located at the window or door openings. However awnings, canopies and arcades may extend the length of building to provide shade at the first floor for the pedestrian.
    - B. Awnings, arcades and canopies shall be mounted to highlight architectural features such as moldings that may be found above the storefront.
    - C. They should match the shape of the opening.
    - D. Simple shed shapes are appropriate for rectangular openings.
    - E. Odd shapes and bubble awnings are prohibited except where the shape of an opening requires a bubble awning, or historic precedent shows they have been previously used on the building.
    - F. Canopies, awnings and arcades shall not conflict with the building's proportions or with the shape of the openings that the awning or canopy covers.
    - G. Historic canopies shall be repaired or replaced with in-kind materials.
  - (2) Materials and Color.
    - A. Awnings and canopies may be constructed of metal, wood or fabric. Certain vinyl is allowed if it has the appearance of natural fiber as approved by the HDRC.
    - B. Awning color shall coordinate with the building. Natural and earth tone colors are encouraged. Fluorescent colors are not allowed. When used for signage it is appropriate to choose a dark color for the canopy and use light lettering for signage.
  - (3) Incorporating lighting into the design of a canopy is appropriate.
    - A. Lights that illuminate the pedestrian way beneath the awning are appropriate.
    - B. Lights that illuminate the storefront are appropriate.
    - C. Internally illuminated awnings that glow are prohibited.

#### UDC Section. 35-675. Archaeology.

When an HDRC application is submitted for commercial development projects within a river improvement overlay district the city archeologist shall review the project application to determine if there is potential of containing intact archaeological deposits utilizing the following documents/methods:

- (1) The Texas Sites Atlas for known/recorded sites, site data in the files of the Texas Archeological Research Laboratory and the Texas Historical Commission;
- (2)USGS maps;
- (3)Soil Survey maps;
- (4)Distance to water;
- (5)Topographical data;
- (6)Predictive settlement patterns;

- (7) Archival research and historic maps;
- (8)Data on file at the office of historic preservation.

If after review the city archeologist determines there is potential of containing intact archaeological deposits, an archaeological survey report shall be prepared and submitted. If, after review by the city archeologist, a determination is made that the site has little to no potential of containing intact archaeological deposits, the requirement for an archaeological survey report may be waived.

Upon completion of a survey, owners of property containing inventoried archaeological sites are encouraged to educate the public regarding archaeological components of the site and shall coordinate any efforts with the office of historic preservation.

*UDC Section 35-676. – Alteration, Restoration and Rehabilitation* 

In considering whether to recommend approval or disapproval of an application for a certificate to alter, restore, rehabilitate, or add to a building, object, site or structure, the historic and design review commission shall be guided by the National Park Service Guidelines in addition to any specific design guidelines included in this subdivision.

- (a) Every reasonable effort shall be made to adapt the property in a manner which requires minimal alteration of the building, structure, object, or site and its environment.
- (b) The distinguishing original qualities or character of a building, structure, object, or site and its environment, shall not be destroyed. The removal or alteration of any historic material or distinctive architectural features shall be avoided when possible.
- (c) All buildings, structures, objects, and sites shall be recognized as products of their own time. Alterations that have no historical basis and which seek to create an earlier appearance are prohibited.
- (d) Changes that may have taken place in the course of time are evidence of the history and development of a building, structure, object, or site and its environment. These changes may have acquired significance in their own right, and this significance shall be recognized and respected.
- (e) Distinctive stylistic features or examples of skilled craftsmanship, which characterize a building, structure, object, or site, shall be kept where possible.
- (f) Deteriorated architectural features shall be repaired rather than replaced, wherever possible. In the event replacement is necessary, the new material should reflect the material being replaced in composition, design, color, texture, and other visual qualities. Repair or replacement of missing architectural features should be based on accurate duplications of features, substantiated by historical, physical, or pictorial evidence rather than on conjectural designs or the availability of different architectural elements from other buildings or structures.
- (g) The surface cleaning of structures shall be undertaken with the gentlest means possible. Sandblasting and other cleaning methods that will damage the historic building's materials shall not be permitted.
- (h) Every reasonable effort shall be made to protect and preserve archaeological resources affected by, or adjacent to, any project.
- (i) Contemporary design for alterations and additions to existing properties shall not be discouraged when such alterations and additions do not destroy significant historical, architectural or cultural material, and such design is compatible with the size, scale, color, material, and character of the property, neighborhood or environment.
- (j) Wherever possible, new additions or alterations to buildings, structures, objects, or sites shall be done in such a manner that if such additions or alterations were to be removed in the future, the essential form and integrity of the building, structure, object, or site would be unimpaired.

#### **FINDINGS:**

- a. The applicant is requesting a Certificate of Appropriateness for approval to construct a 6-story, multi-family residential structure on the lots addressed as 815, 825, 827, 835 and 841 E Ashby Place. Within this proposed development, the applicant has also proposed to perform landscaping and river beautification improvements, trail improvements and low impact development features along the San Antonio River. The proposed new construction will feature 338 residential units.
- b. CONCEPTUAL APPROVAL This request received conceptual approval at the April 3, 2020, Historic and Design Review Commission hearing with the following stipulations:

- i. That the applicant coordinate with the San Antonio River Authority regarding landscaping and maintenance boundaries, direct access to the river and storm water control.
- ii. That all mechanical equipment be screened from view at the public right of way.
- iii. That the applicant recess windows at least two inches within walls and that windows feature dark colors.
- iv. Archaeological investigations shall be required. The archaeological scope of work should be submitted to the Office of Historic Preservation archaeologists for review and approval prior to beginning the archaeological investigation. The development project shall comply with all federal, state, and local laws, rules, and regulations regarding archaeology.
- c. SAN ANTONIO RIVER AUTHORITY COORDINATATION Per the UDC Section 35-672(c)8, consultation with the San Antonio River Authority regarding direct access to the San Antonio River, landscaping and maintenance boundaries and storm water control measures prior to the submission for a Certificate of Appropriateness. The applicant is responsible for complying with this section of the UDC.
- d. PEDESTRIAN CIRCULATION Per the UDC Section 35-672(a), pedestrian access shall be provided among properties to integrate neighborhoods. Additionally, the various functions and spaces on a site must be linked with sidewalks in a coordinated system. The applicant has proposed sidewalks adjacent to E Ashby, as well as sidewalks on the west, north and east of the proposed new construction. Additionally, the applicant has proposed a sidewalk adjacent to the San Antonio River. Staff finds the proposed sidewalks to be appropriate and consistent with the UDC. The applicant is responsible for continuing to coordinate with the San Antonio River Authority regarding low impact development, maintenance boundaries, and connections to any existing sidewalks and pathways.
- e. AUTOMOBILE PARKING The UDC Section 35-672(b)(2) notes that automobile parking should be located toward the interior of the site. The applicant has proposed both structured parking to be wrapped by residential space as well as surface parking to be located to the east of the proposed new construction and the rear of the Borden Building. Staff finds the proposed parking locations to be appropriate; however, FAÇADE COMPOSITION (STRUCTURED PARKING) As noted in finding e, staff finds that the applicant should incorporate design elements that work to break up the expanse of the parking garage structure on the north façade. Staff finds that the façade bays found above should be articulated on the exposed parking structure.
- f. CURB CUTS The RIO design objectives outlined in the UDC include the creation of a "positive pedestrian experience" at the street edge. Standards related to curb cuts and interference with pedestrian traffic are also provided. The UDC requires projects to limit curb cuts to two (2) on parking areas or structures facing only one (1) street, and one (1) for each additional street face. The applicant has proposed to utilize the two existing curb cuts on E Ashby, and one existing curb cut on River Road. Staff finds this to be appropriate.
- g. SITE DESIGN According to the UDC Section 35-673, buildings should be sited to help define active spaces for area users, provide pedestrian connections between sites, help animate the street scene and define street edges. Primary entrances should be oriented toward the street and shall be distinguishable by an architectural feature. The applicant has proposed to site the new construction adjacent to the right of way at E Ashby. Staff finds the proposed site design to be appropriate and consistent with the UDC.
- h. SITE DESIGN The applicant has proposed to perform river beautification improvements, trail improvements and low impact development features along the San Antonio River. As noted in finding c, the applicant is responsible for coordinating with the San Antonio River Authority regarding any direct access to the river, storm water control and landscaping and maintenance boundaries.
- i. SITE DESIGN As previously noted, the proposed dog parks and low impact development features are planned to be installed on public property. The City of San Antonio would be responsible for all maintenance. Staff finds that the applicant should coordinate with Transportation & Capital Improvements and Parks & Recreation for each proposed improvement on public property.
- j. RIVER BRIDGE The applicant has proposed to construct a pedestrian bridge across the San Antonio River to the immediate south of US Highway 281. Staff finds the proposed location of the bridge to be appropriate; however, the final design should return to the Commission for approval. Additionally, the applicant is to coordinate with the San Antonio River Authority, COSA Transportation & Capital Improvements, COSA Parks & Recreation, and any other regulatory body, as required.
- k. LANDSCAPE DESIGN The applicant has submitted a detailed landscaping plan that includes the locations of low impact development features, site walkways, plantings, and other landscaping elements and materials. Staff finds the proposed landscaping plan to be appropriate and consistent with the UDC.
- 1. MECHANICAL & SERVICE EQUIPMENT The UDC Section 35-673(n) addresses service areas and mechanical equipment and their impact on the public. Service areas and mechanical equipment should be visually unobtrusive and should be integrated with the design of the site and building. Noise generated from mechanical

- equipment shall not exceed city noise regulations. The applicant has noted that mechanical equipment will be located at the rooftop level. The rooftop equipment will be screened by parapet walls, which staff finds to be appropriate and consistent with the UDC.
- m. HUMAN SCALE According to the UDC Section 35-674(b) a building shall appear to have a "human scale". To comply with this, a building must (1) express façade components in ways that will help to establish building scale, (2) align horizontal building elements with others in the blockface to establish building scale, (3) express the distinction between upper and lower levels, (4) in this instance, divide the façade of the building into modules that express traditional and (5) organize the mass of a building to provide solar access to the river. The applicant has provided a human scale in multiple instances, including the installation of recessed balconies and human scaled facade openings. The applicant has also proposed various materials, including brick that features a human scale. Staff finds this to be consistent with the UDC.
- n. FAÇADE SEPARATION The UDC Section 35-674 (b)(4) notes that a façade in RIO-2 that features more than fifty (50) feet in length should be divided into modules that express traditional dimensions. The applicant has proposed façade segments that are separated by both vertical and horizontal banding, variations in materials and textures and varying façade planes. This is consistent with the UDC.
- o. BUILDING MASSING & HEIGHT The UDC regulates building height within the River Improvement Overlay Districts. For RIO-2, the maximum height for new construction is ten (10) stories or 120 feet. Staff finds the proposed height to be appropriate and consistent with the UDC.
- p. MATERIALS The applicant has proposed materials that include brick and cementitious façade materials. Additionally, the applicant has proposed metal windows and metal balcony railings. The proposed materials are consistent with the UDC.
- q. FAÇADE COMPOSITION The UDC Section 35-678(e) notes that traditionally, buildings have been organized into three distinct segments; a base, midsection and cap. This organization helps to give a sense of scale to a building and its use should be encouraged. The applicant has clearly defined a base through the use of materials, façade arrangement and massing, a midsection through varying materials and a horizontal façade emphasis, and a cap through parapet cap banding, cornice banding and rooftop railings. Staff finds the proposed façade composition to be appropriate and consistent with the UDC.
- r. FAÇADE COMPOSITION (STRUCTURED PARKING) As noted in finding e, staff finds that the applicant should incorporate design elements that work to break up the expanse of the parking garage structure on the north façade. Staff finds that the façade bays found above should be articulated on the exposed parking structure.
- s. WINDOWS The applicant has proposed vinyl windows; however, the applicant has not noted window colors. Per the submitted building sections, windows that are installed at locations with brick and stucco cladding will feature a two (2) inch inset. Additionally, staff finds that dark colored windows frames should be installed. White windows should not be installed.
- t. SIGNAGE The applicant has not submitted formal signage documents; however, the applicant has noted wall signage on both the north and west facades to read "Borden". The applicant has not provided the overall size or application of the proposed signs. Staff finds that a master signage plan should be submitted for the entire site for review and approval by the Commission.
- u. ARCHAEOLOGY The property is located within the River Improvement Overlay District and is adjacent to the historic alignment of the San Antonio River. In addition, the project area is in close proximity to previously recorded archaeological site 41BX13, a designated State Antiquities Landmark, the Brackenridge Park Local Historic Landmark, the Brackenridge Park State Antiquities Landmark, and the Brackenridge Park National Register of Historic Places District. Therefore, archaeological investigations are required. Work within property owned by a political subdivision of the State of Texas is subject to the Texas Antiquities Code. The project shall comply with all federal, state, and local laws, rules, and regulations regarding archaeology, as applicable.


#### **RECOMMENDATION:**

Staff recommends approval based on findings a through t with the following stipulations:


- i. That the applicant continue coordination with the San Antonio River Authority (SARA) regarding direct access to the San Antonio River, landscaping and maintenance boundaries, and storm water control measures.
- ii. That the applicant coordinate with Transportation & Capital Improvements and Parks & Recreation for each proposed improvement on public property.

- iii. That the final design of the proposed river bridge return to the Commission for approval. Additionally, the applicant is to coordinate with the San Antonio River Authority, COSA Transportation & Capital Improvements, COSA Parks & Recreation, and any other regulatory body, as required.
- iv. That the applicant incorporate design elements that work to break up the expanse of the parking garage structure on the north façade. Staff finds that the façade bays found above should be articulated on the exposed parking structure.
- v. ARCHAEOLOGY Archaeological investigations are required. The project shall comply with all federal, state, and local laws, rules, and regulations regarding archaeology, as applicable.

### City of San Antonio One Stop

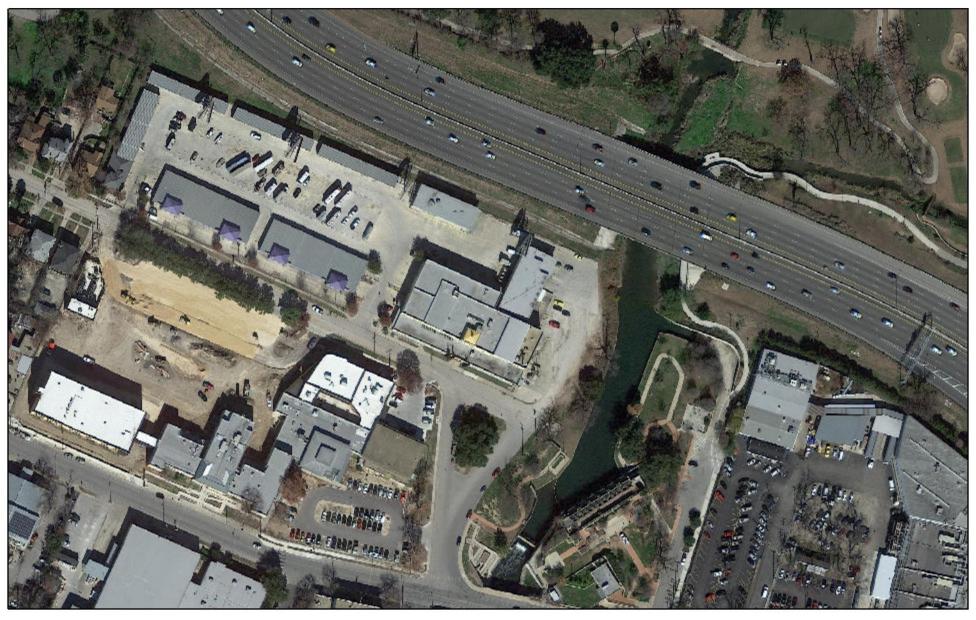

February 10, 2020







# **HDRC** Application

815 E. Ashby & River Way

100 West Houston Street, Suite 1250, San Antonio, Texas 78205-1457 TELE: (210) 227-2000 FAX: (210) 227-2001 www.kk-lawfirm.com

#### January 28, 2020

Mr. Cory Edwards
Deputy Director
City of San Antonio, Office of Historic Preservation
1901 S. Alamo Street
San Antonio, Texas 78204

RE: Authorization to Submit HDRC Application for Final Approval for the Multi-Family and Public Improvements Projects Located at 815 E. Ashby Place, San Antonio, Texas

Dear Mr. Edwards,

The purpose of this correspondence is to provide authorization to Kaufman & Killen, Inc. to act as applicant and representative in the filing and processing for approval of an application to the Historic and Design Review Commission ("HDRC") for final design approval for the multifamily and public improvements projects located at 815 E. Ashby Place ("Property").

I hereby declare that I represent Borden River Road, LP, the owner of the Property, and have the authority to grant permission to submit and process for approval an application to the HDRC. Thank you for your time and attention to this matter.

Sincerely,

By:

Name

Timmy Mcclosky

STATE OF TEXAS

8

COUNTY OF BEXAR

§

BEFORE ME, the undersigned authority, on this day personally appeared on behalf of Borden River Road, LP, whose name is subscribed to the foregoing instrument and who acknowledged that he/she executed the foregoing instrument on behalf of said property owner.

GIVEN UNDER MY HAND AND SEAL OF OFFICE this 28 day of 2020.

ALLISON HOCKERSMITH
Notary Public, State of Texas
Comm. Expires 04-30-2021
Notary ID 10844045

Notary Public, State of Texas


Print Name: Allen Housevalue

## **Photos**


HDRC Application – 815 E. Ashby & River Way






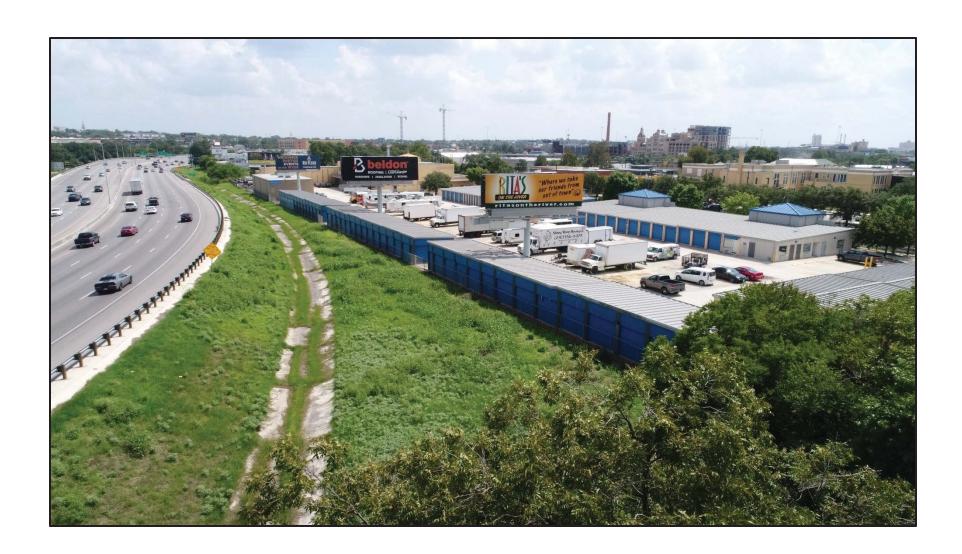



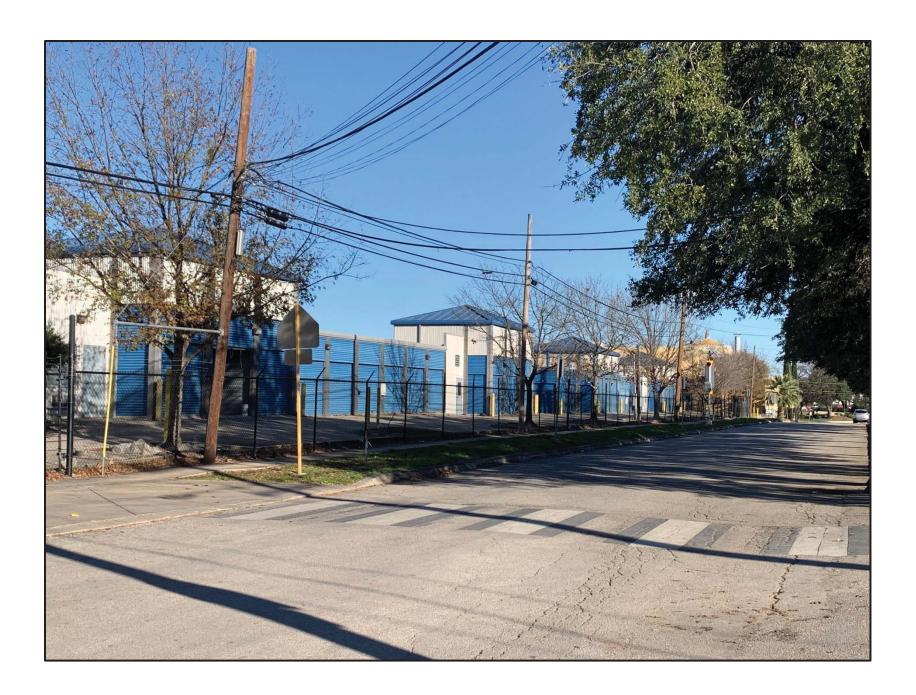

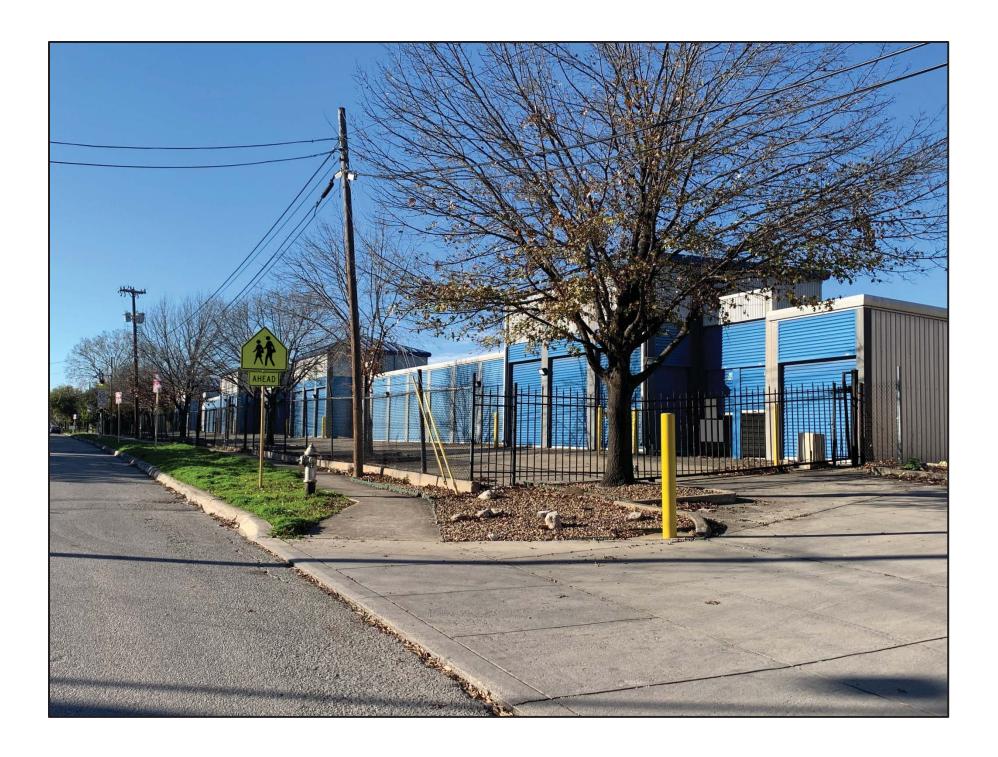
















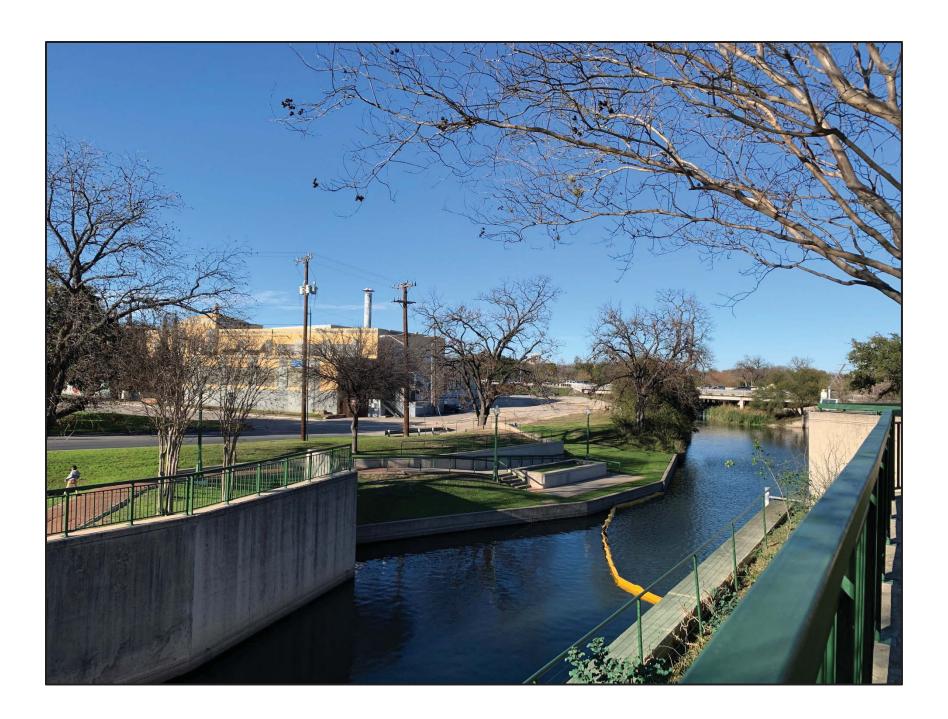


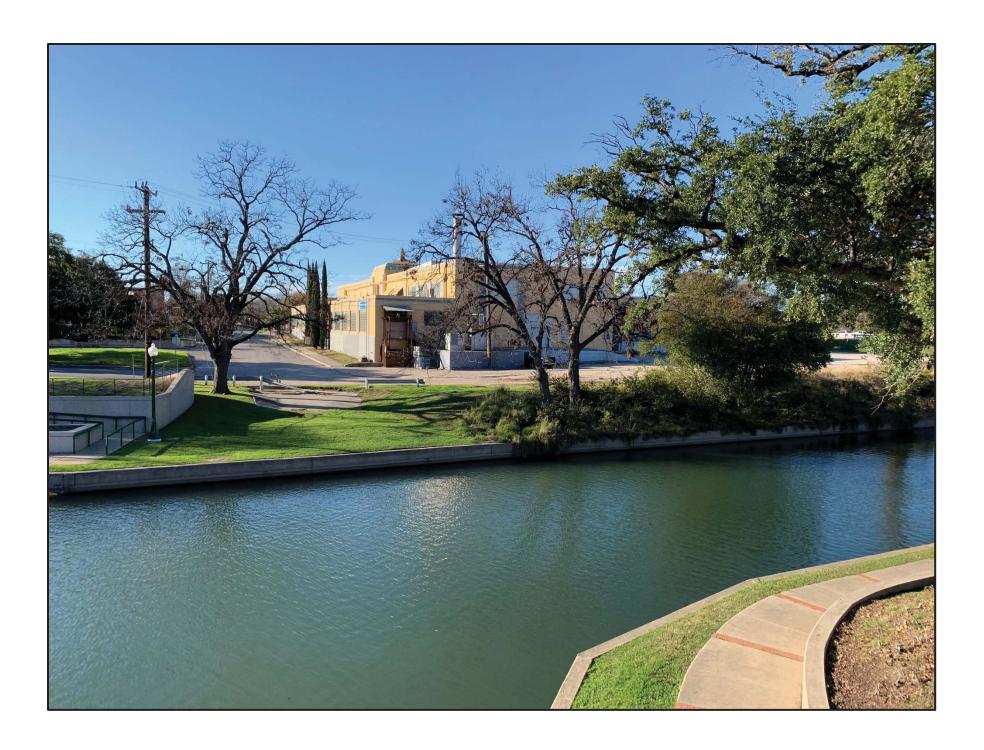





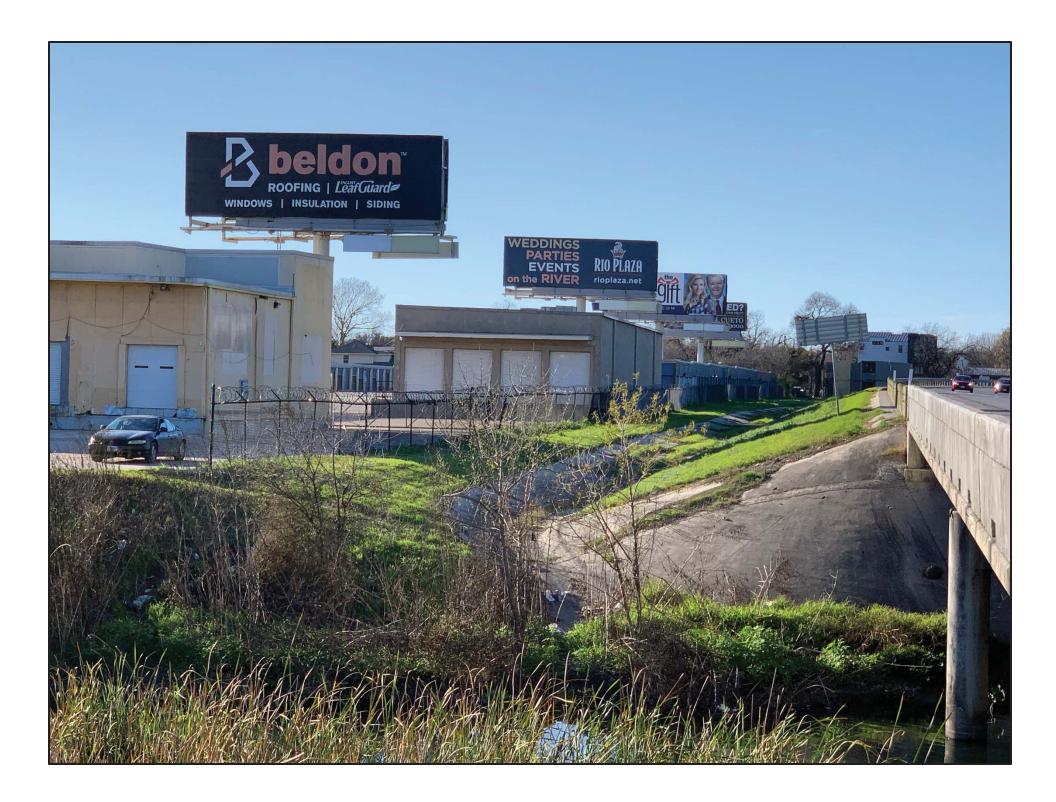

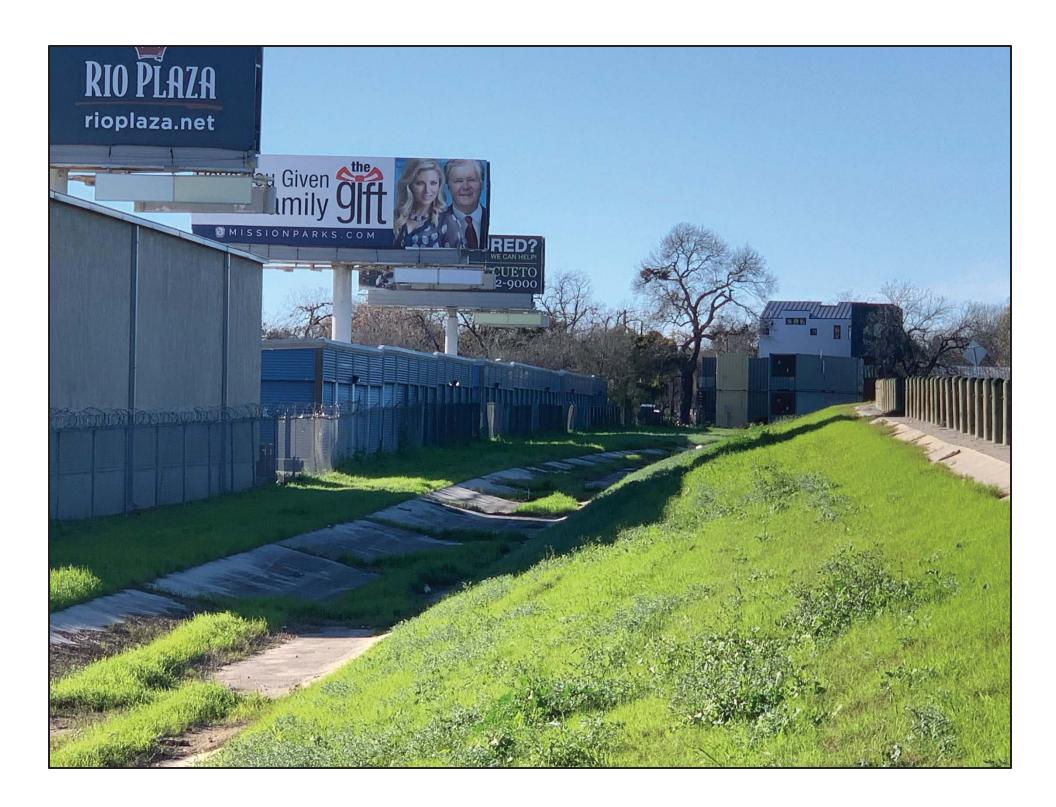

# **Project Description**

HDRC Application – 815 E. Ashby & River Way


# Project Description 815 E. Ashby

815 E. Ashby is a proposed mixed-use project, including multi-family housing and commercial, office, and retail uses. The project site is 5.107 acres and currently used for self-storage. The project will consist of an approximately 338 units, with parking at the lower levels and residential living above. The existing Borden building will be redeveloped primarily for office use, along with some commercial and retail uses. The overall project is also planned to include River beautification improvements, trail improvements, and Low Impact Development features.

This application includes a request for final design approval of the multi-family portion of the project and the off-site public improvements. A separate application is being submitted for the Borden building design.

## **Site Plan**

HDRC Application – 815 E. Ashby & River Way

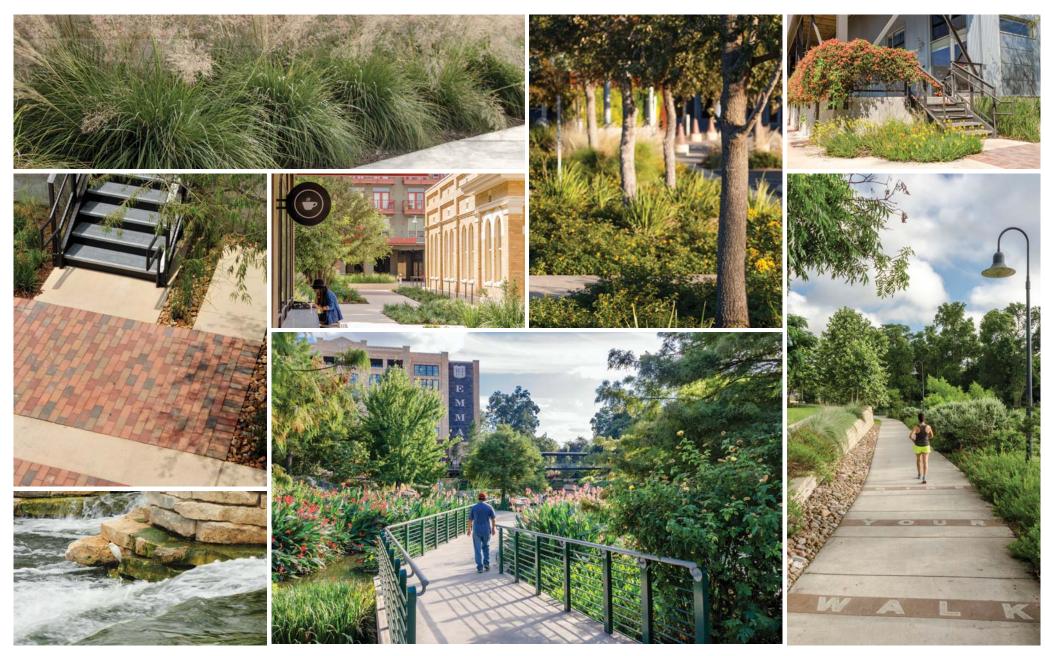

**HUMPHREYS & PARTNERS** ARCHITECTS, L.P. 5339 Alpha Rd., Sulle 300, Dalas, TX 75240 | 972.701.9636 | www.humphreys.com


RIALTO STUDIO LANDSCAPE ARCHITECTURE

**EMBREY** 

Borden Park City of San Antonio, Bexar Country, TX HPA# 18348







## **Elevations**

HDRC Application – 815 E. Ashby & River Way



815 E. Ashby - Final Elevation Corner View



815 E. Ashby - Final Elevation Main Entry Ashby Corner View



815 E. Ashby - Final Elevation 281 View

### **BORDEN PARK**

SAN ANTONIO, TX



#### CODE SUMMARY

#### APPLICABLE CODES IN EFFECT FOR THE CITY OF SAN ANTONIO, TX

#### ADOPTED EDITION

BUILDING CODE FIRE CODE ELECTRICAL CODE MECHANICAL CODE PLUMBING CODE ENERGY CODE ACCESSIBILITY CODE

2018 INTERNATIONAL BUILDING CODE, BUILDING (IBC)\* 2018 INTERNATIONAL FIRE CODE (IFC)\* 2017 NATIONAL ELECTRIC CODE (NEC)\* 2017 INTERNATIONAL ELECTRIC CODE (INC)\* 2018 INTERNATIONAL PLUMBING CODE (IPC)\* 2018 INTERNATIONAL ENERGY CODE (IECC)\* 2018 INTERNATIONAL ENERGY CODE (IECC) 2012 TEXAS ACCESSIBILITY STANDARDS (TAS) 2010 ADA STANDARDS FOR ACCESSIBLE DESIGN FEDERAL FAIR HOUSING ACT

ALL DEFERRED SUBMITTALS SHALL BEAR THE SEAL AND SIGNATURE OF A LICENSED PROFESSIONAL, AS REQUIRED. CONTRACTOR TO SUBMIT SHOP DRAWINGS TO THE ARCHITECT FOR REVIEW PRIOR TO THE START OF CONSTRUCTION, ALL ITEMS THAT REQUIRE SEPARATE PERMITS SHALL BE OBTAINED BY THE CONTRACTOR.

- FIRE ALARM (SEPARATE PERMIT) FIRE SPRINKLER (SEPARATE PERMIT)
- POOL AND POOL EQUIPMENT LAYOUT (SEPARATE PERMIT)
- GUARDRAILS AND HANDRAILS
- LOW VOLTAGE ACCESS CONTROL AND SECURITY SYSTEMS (SEPARATE PERMIT)
- FORMWORK INCLUDING SHORING AND/OR RESHORING
- POST TENSION CABLE LAYOUT
- PREMANUEACTURED AWNING/CANORY

#### **BUILDING SUMMARY**

#### PROJECT SCOPE

- (1) 4 STORY MULTI-FAMILY RESIDENTIAL, 338 UNITS TOTAL
- ATTACHED AMENITY/LEASING CENTER 2-STORY PARKING GARAGE

OCCUPANCY CLASSIFICATION APARTMENTS: CLUBHOUSE: GARAGE: TYPE I-A

#### AUTOMATIC FIRE ALARM AND SPRINKLER SYSTEM

THE FIRE SPRINKLER SYSTEM MUST MEET ALL REQUIREMENTS OF NFPA 13 FIRE SPRINKLER SYSTEMS INCLUDING

THE FIRE ALARM SYSTEM MUST BE INSTALLED AND MEET ALL REQUIREMENTS OF IBC 907.2.9 & NFPA 72.

#### ARCHITECT:



#### HUMPHREYS & PARTNERS ARCHITECTS, L.P.

5339 ALPHA ROAD STE 300 DALLAS, TEXAS 75240 (972) 701-9636 (972) 701-9639

DALLAS · CHARLOTTE · CHICAGO · DENVER · NEW ORLEANS · NEW YORK · NEWPORT BEACH · ORLANDO SCOTTSDALE · CHENNAI · HANOI · LONDON · MONTEVIDEO · MEXICO CITY · TORONTO

A.O.R.: DON DAVIS

PROJECT CONTACT: ANDRE WARREN

ABIGAIL KATSOULIS

#### OWNER: **EMBREY PARTNERS**

1020 NE LOOP 410, SUITE 700 - SAN ANTONIO, TX 78209 PHONE: 210.824.6044

> CONTACT: Jimmy McCloskey EMAIL: JMcCloskev@embrevdc.com

L								
CIVIL	LANDSCAPE	STRUCTURAL	MEP / LOW VOLTAGE	INTERIORS	PERMIT EXPEDITOR	ACCESSIBILITY	CONTRACTOR	GOVERNMENT
PAPE - DAWSON	RIALTO STUDIO	INTEGRITY STRUCTURAL CORP.	NICHOLS ENGINEERS	DESIGN ENVIRONMENTS, INC.	PROTECTION DEVELOPMENT, INC.	ACCESS PARTNERSHIP	EMBREY PARTNERS, LTD	CITY OF SAN ANTONIO DEVELOPMENT SERVICES
2000 NW LOOP 410 SAN ANTONIO, TX 78213 210.375,9000	2425 BROADWAY ST, SUITE #105 SAN ANTONIO, TX 78213 210.828.1155	12777 JONES RD., SUITE #388 HOUSTON, TX 77070 281.894.7099	912 S CAPITOL OF TEXAS Suite 200 AUSTIN, TX 78746 512.593.5616	3025 CHASTAIN MEADOWS PKWY. SUITE 200 MARIETTA, GA 20066 770.429.3200	8620 N. NEW BRAUNFELS AVE SUITE 100 SAN ANTONIO, TX 78217 210.828.7533	3267 BEE CAVES ROAD SUITE 107-502 AUSTIN, TX 78746 512-476-8675	1020 NE LOOP 410, SUITE 700 SAN ANTONIO, TX 78209 210.824.6044	1901 SOUTH ALAMO STREET SAN ANTONIO, TX 78204 210.207.1111
CONTACT: WILL KROLL EMAIL: WKroll@pape.dawson.com	CONTACT: BOBBY EICHHOLZ EMAIL: babbyshrialtestudio.com	CONTACT: JOHN L. COULSON EMAIL: john@integrifystructural.com	CONTACT: DAVID NICHOLS EMAIL: david@nicholseng.com	CONTACT: DONNA DELUCA EMAIL: ddelucaviridesignenvironments.com	CONTACT: DAVID EMLER EMAIL: demler@pdifire.com	CONTACT: CELIA BOYLE EMAIL: cellarifraccess-lp.com	CONTACT: MIKE BRANNEN EMAIL: MBrannen@embreydc.com	

### PRINT RECORD 50% DESIGN DEVELOPMENT

REVISION RECORD

VICINITY MAP

SAN ANTONIO




**BORDEN PARK** 

nly and not to be used



A0.00

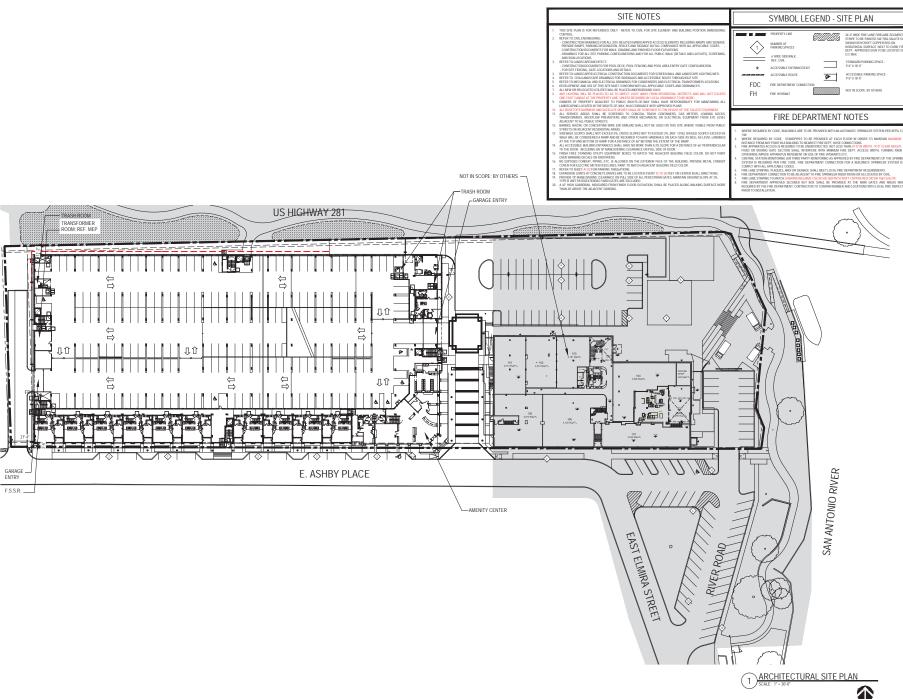

**BORDEN PARK** 

These drawings are for preliminary coordination only and not to be used for coordination.

HUMPHREYS& PARTNERS ARCHITECTS, L.P.



ARCHITECTURAL SITE PLAN

A1.01

3-HR FIREWALL

T.O.D. 100'-9" ELEVATION SIGNATURE SOOR TAG ALXX EXTERIOR ELEVATION TAG XX WALL ASSEMBLY TAG

FURSEDOWN FLOOR SPACE
CERNIC AREAS

WITH TOLERANCE
AREA (COVER) SHOW
WITH TOLERANCE
AREA (COVER) SH

2 INTERIOR LLEVATION TA

₩NDOWTAG

A HT.F.F. LOCATION

INCH OR SECONDS

28r/28a

338

T1-ALT1 28r/28a

TOTALS

137 1,878 15,669

1 1,741 0 0 137 1,878 338 1,184

2.66

0.30

**EMBREY** 

**BORDEN PARK** 

preliminary coordination only and not to be used

HUMPHREYS & PARTNERS

ARCHITECT L.P.
SIMPHAGNIC LITE. AS THE PARTNERS

SIMPHAGNIC CONTROL OF THE PARTNERS

ARCHITECT CONTROL OF THE PARTNERS

THE PARTNERS CONTROL OF THE PARTNERS

THE PARTNERS CONTROL OF THE PARTNERS


THE PARTNERS CONTROL OF THE PARTNERS CONTROL OF THE PARTNERS

THE PARTNERS CONTROL OF THE PARTNERS CONTROL OTHER CONTROL OF THE PARTNERS CONTROL OF



GENERAL NOTES, CODES & TABULATIONS

A1.02

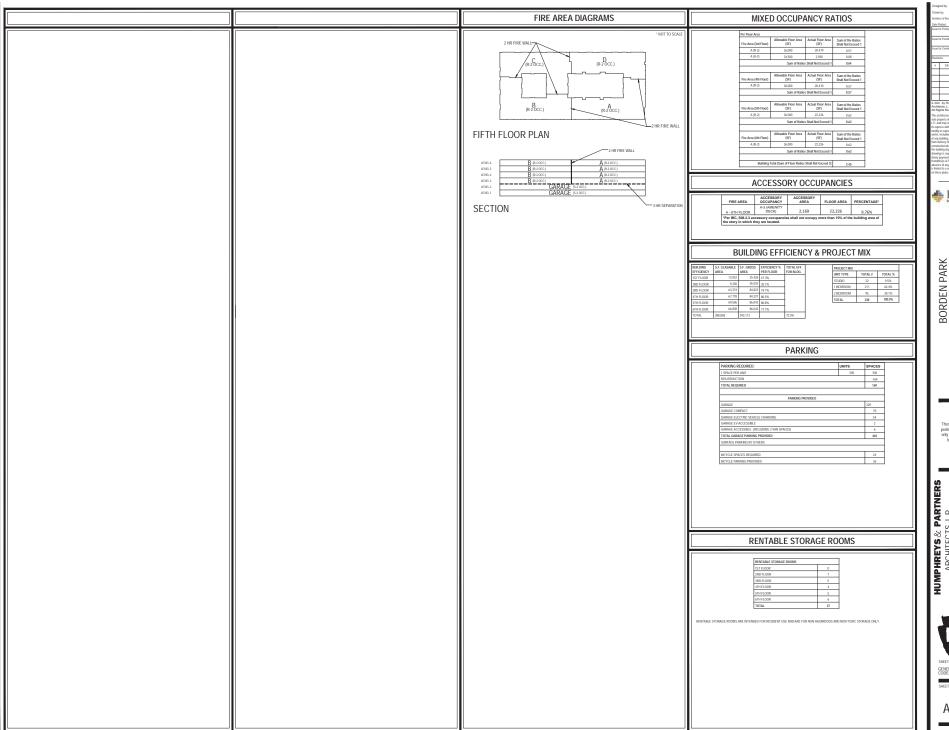

These drawings are for preliminary coordination only and not to be used for construction.

HUMPHREYS& PARTNERS
ARCHITECTS, L.P.
SSRALPH REND. SUITED. NALLS. TEACH STATE
WITHOUT STATE STATE
WITHOUT CHICAGO. THE STATE STATE
WHEN STREAM STATE STATE STATE
WHEN STATE STATE STATE STATE
WHEN STATE STATE
WHEN STATE STATE
WHEN ST



A1.02a





SAN ANTONIO, TX EMBREY

**BORDEN PARK** 

preliminary coordination only and not to be used for construction.

HUMPHREYS & PARTNERS

ARCHITECTS, L.P.

SUMMAR OF SHIRT SHARP SHARP

SUMMAR OF SHIRT SHARP

BULL CHARLOW SHOTTERS SHARP

INDOOR SHARP SHARP

INDOOR SHARP SHARP

INDOOR SH



DOOR SCHEDULE DETAILS AND NOTES

A2.01

SAN ANTONIO, TX EMBREY

preliminary coordination only and not to be used for construction.

HUMPHREYS & PARTNERS

ARCHITECT. L.P.

SEP AND SHITE OF SHIRE SHIP SHIP

SEP AND SHIP SHIP SHIP SHIP

SEP AND SHIP SHIP SHIP

SEP AND SHIP SHIP SHIP

SHIP SHIP SHIP

SHIP SHIP SHIP

SHIP SHIP

SHIP SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP

SHIP


SHIP


SHIP

**BORDEN PARK** 

WINDOW SCHEDULE DETAILS AND NOTES

A2.02

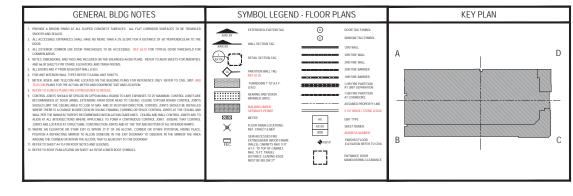

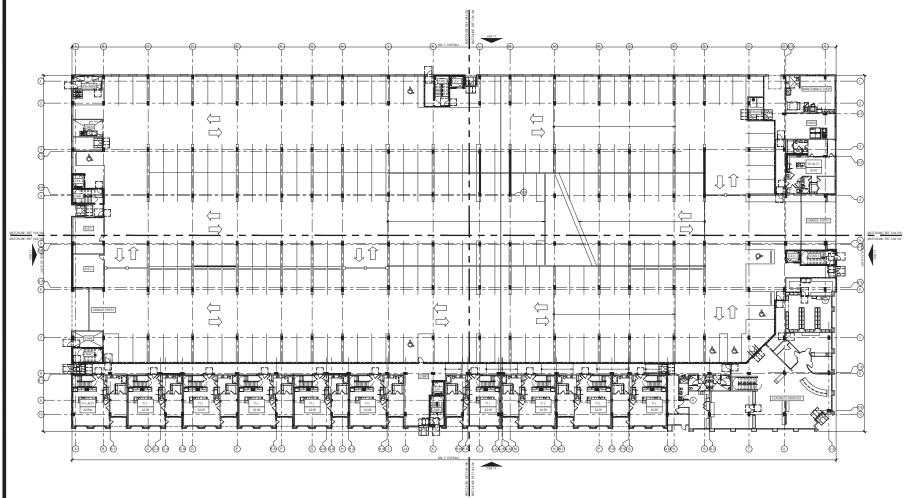





**BORDEN PARK** 

SANANTONIO, TX EMBREY

preliminary coordination only and not to be used for construction

HUMPHREYS & PARTNERS


ARCHITECTS, L.P.

SUN ALPHA ROLD. SULTED. DALLAS. TEXAS TALL

ROLD. SOLVED. TO SULTED. TO SULTED. SULTED.

ROLD. SOLVED. SULTED. SULTED.



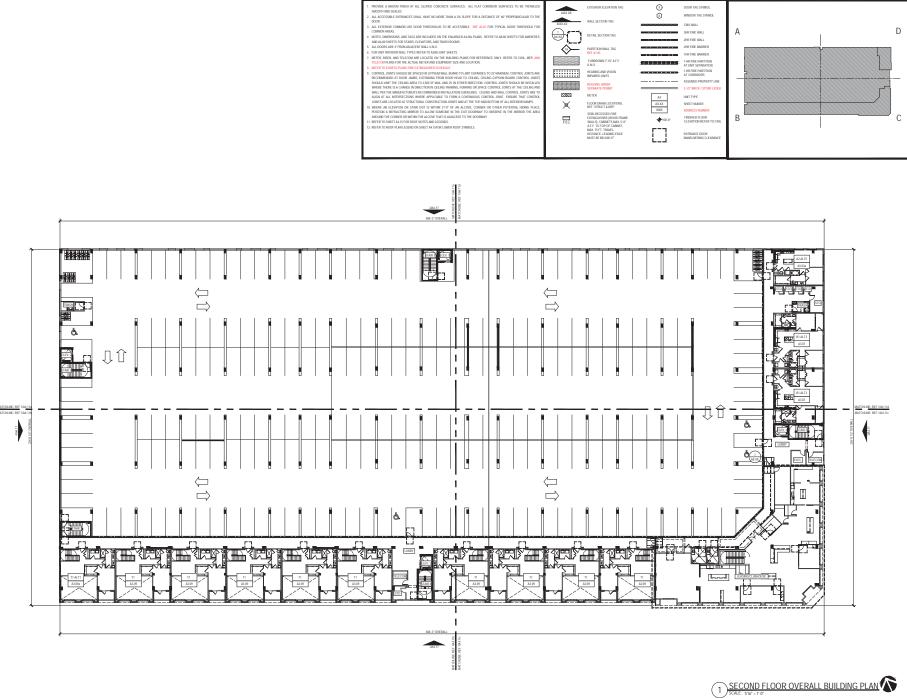

GENERAL BLDG NOTES

SYMBOL LEGEND - FLOOR PLANS

KEY PLAN

# EMBREY

**BORDEN PARK** SANANTONIO, TX EMBREY

These drawings are for preliminary coordination only and not to be used for construction.


HUMPHREYS & PARTNERS


ARCHITECTS, L.P.

STR ALFWA ROAD SURTED DALLIS TEXTS TO THE TOTAL THE TOTAL THE TOTAL THE TOTAL THE TOTAL CHARGOTTE CHARGOTT



SECOND FLOOR OVERALL BUILDING PLAN



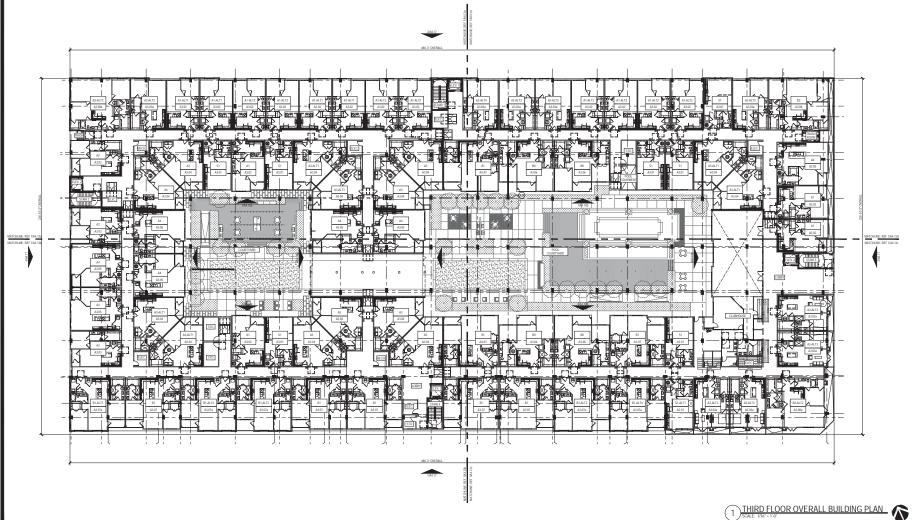



**BORDEN PARK** SAN ANTONIO, TX

preliminary coordination only and not to be used



OVERALL BUILDING PLAN



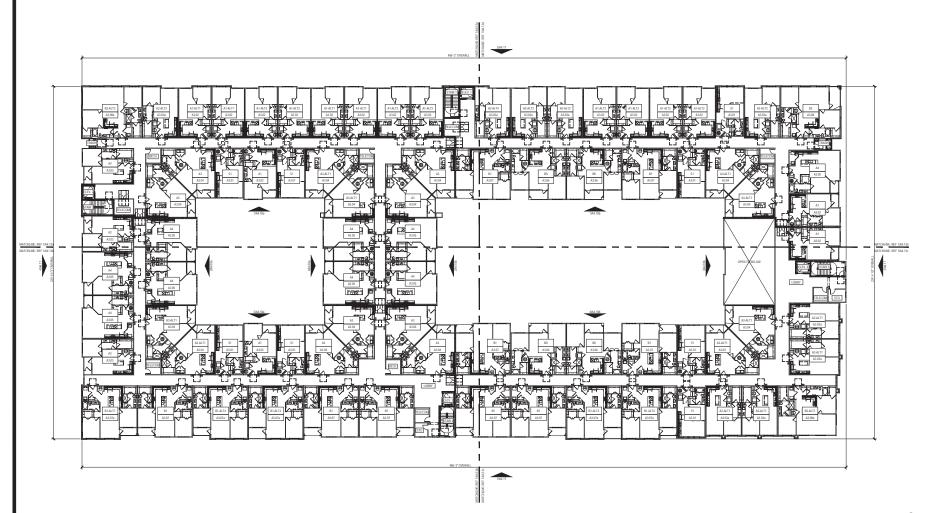

**BORDEN PARK** 

SAN ANTONIO, TX

preliminary coordination only and not to be used

HUMPHREYS & PARTNERS

ARCHITECTS, L.P.

SUN ALPHA ROLD. SULTED. DALLAS. TEXAS TALL

ROLD. SOLVED. TO SULTED. TO SULTED. SULTED.


ROLD. SOLVED. SULTED. SULTED.




FOURTH FLOOR OVERALL BUILDING PLAN

A4.13

FOURTH FLOOR OVERALL BUILDING PLAN



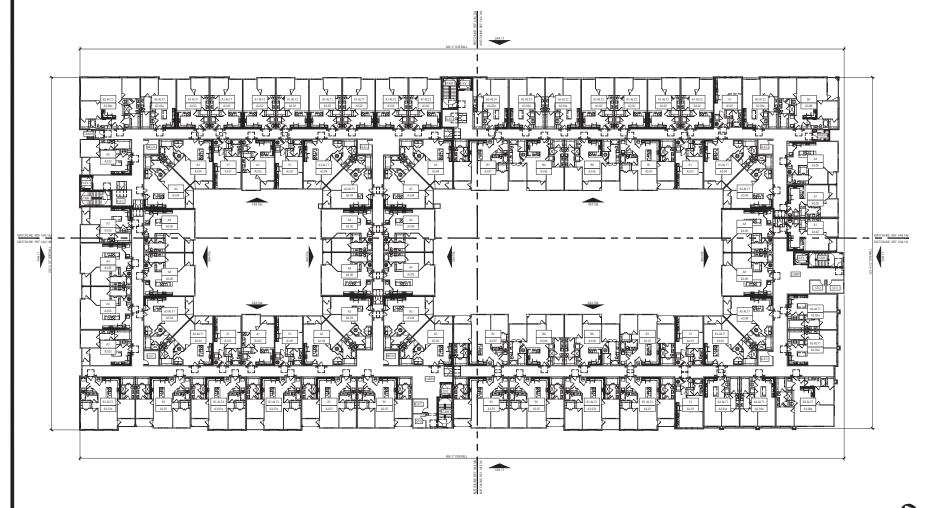



**BORDEN PARK** 

SAN ANTONIO, TX

preliminary coordination only and not to be used

HUMPHREYS & PARTNERS


ARCHITECTS, L.P.


SUN ALPHA ROLD. SULTED. DALLAS. TEXAS TALL

ROLD. SOLVED. TO SULTED. TO SULTED. SULTED.

ROLD. SOLVED. SULTED. SULTED.





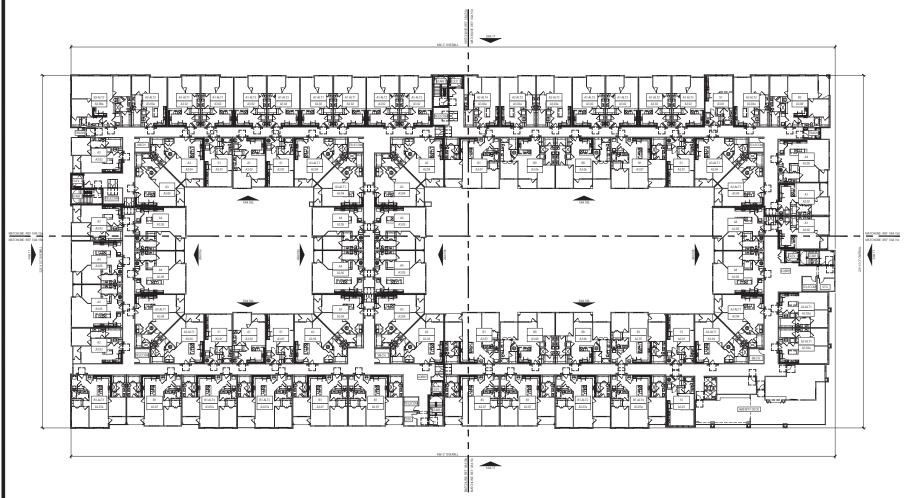





worksteaks I.P.

If they are Reserved in the service and the s



SAN ANTONIO, TX

**BORDEN PARK** 

These drawings are for preliminary coordination only and not to be used for construction.

HUMPHREYS & PARTNERS

ARCHITECTS, L.P.

SSSWADWA SUREDO DALLAS TENDS 75240


PROTING AND THE TOWN STAND TOWN STAND TOWN STAND TOWN STAND TOWN STAND TOWN STAND STAN



SIXTH FLOOR OVERALL BUILDING PLAN SHEET NO.

A4.15

18348

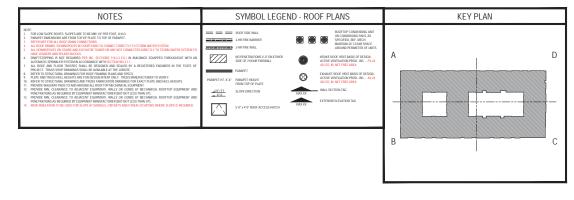





**BORDEN PARK** SAN ANTONIO, TX


These drawings are for preliminary coordination only and not to be used for construction.


HUMPHREYS & PARTNERS
ARCHITECTS, L.P.
SERVALMA ROLD. SERVEY AS SERVEY
ARCHITECTS, L.P.
SERVALMA SERVEY AS SERVEY
REPORTED. SERVEY AS SERVEY REPORTS SERVEY AS SERVEY A

OVERALL ROOF PLAN



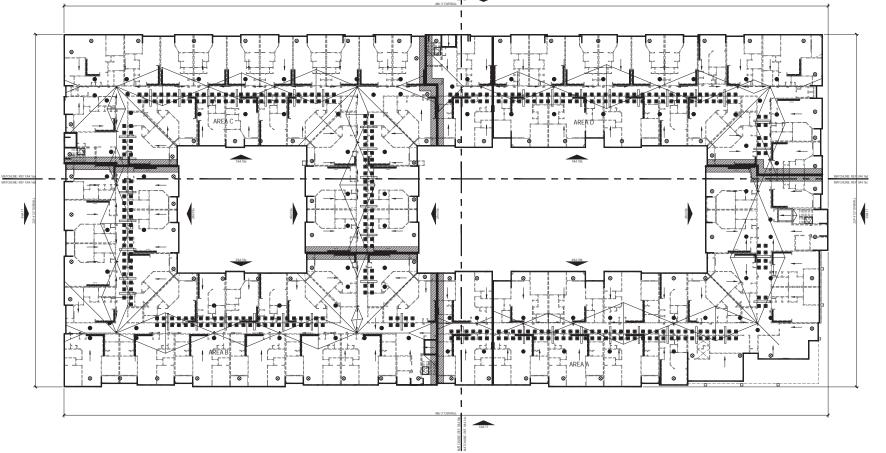



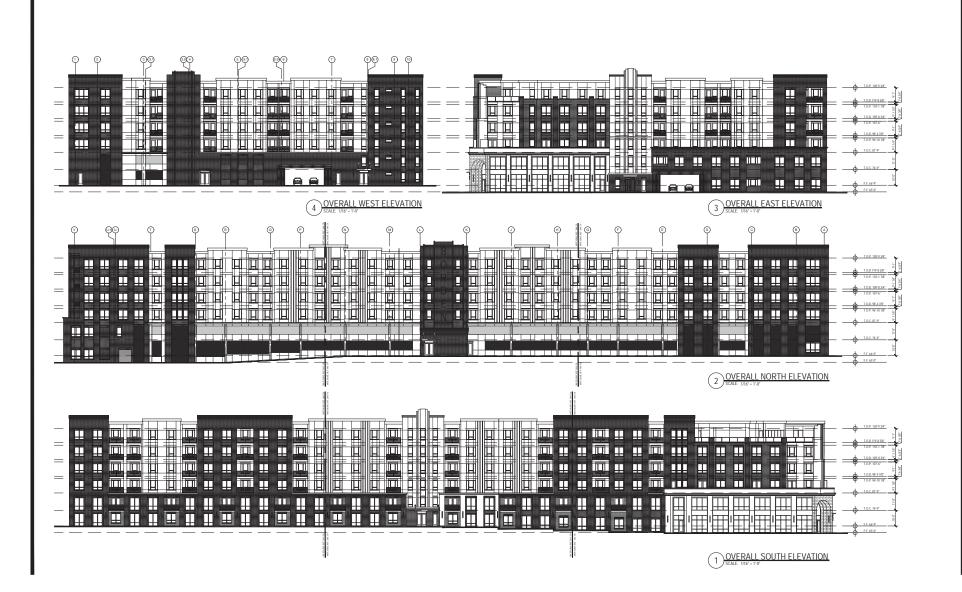

**BORDEN PARK** 


oreliminary coordination only and not to be used for construction

HUMPHREYS& PARTNERS ARCHITECTS, L.P.



OVERALL ELEVATIONS





2 PARTIAL SOUTH ELEVATION
SCALE: 1/8" = 1'-0"



HUMPHREYS& PARTNERS ARCHITECTS, L.P.

SAN ANTONIO, TX


preliminary coordination only and not to be used

PARTIAL ELEVATIONS

A4.17a

1 PARTIAL SOUTH ELEVATION





2 PARTIAL NORTH ELEVATION



HUMPHREYS& PARTNERS ARCHITECTS, L.P.

SAN ANTONIO, TX

preliminary coordination only and not to be used

PARTIAL ELEVATIONS

A4.17b

1 PARTIAL SOUTH ELEVATION



◌

0

◌

٥

₿

0


2 - 6TH FLR

2 - STH FLR

2-4THFLR P

(8)


₿



UNIT A1 A

E E UNITALA

UNIT A1 ALT 2 - 6TH FLR



PARTIAL NORTH ELEVATION

preliminary coordination only and not to be used

SANANTONIO, TX EMBREY


HUMPHREYS& PARTNERS ARCHITECTS, L.P.



PARTIAL ELEVATIONS

A4.17c

1 PARTIAL NORTH ELEVATION





1 EAST ELEVATION
SCALE: 1/8" = 1'-0"



**BORDEN PARK** 

SANANTONIO, TX EMBREY

These drawings are for preliminary coordination only and not to be used for construction.


HUMPHREYS & PARTNERS

ARCHITECTS, L.P.

STR ALFWA ROAD SURTED DALLIS TEXTS TO THE TOTAL THE TOTAL THE TOTAL THE TOTAL THE TOTAL CHARGOTTE CHARGOTT



A4.17d





1 WEST ELEVATION
SCALE: 1/8" = 1'-0"



SAN ANTONIO, TX

**BORDEN PARK** 

These drawings are for preliminary coordination only and not to be used for construction.


HUMPHREYS & PARTNERS

ARCHITECTS, L.P.


STR ALFWA ROAD SURTED DALLIS TEXTS TO THE TOTAL THE TOTAL THE TOTAL THE TOTAL THE TOTAL CHARGOTTE CHARGOTT




A4.17e

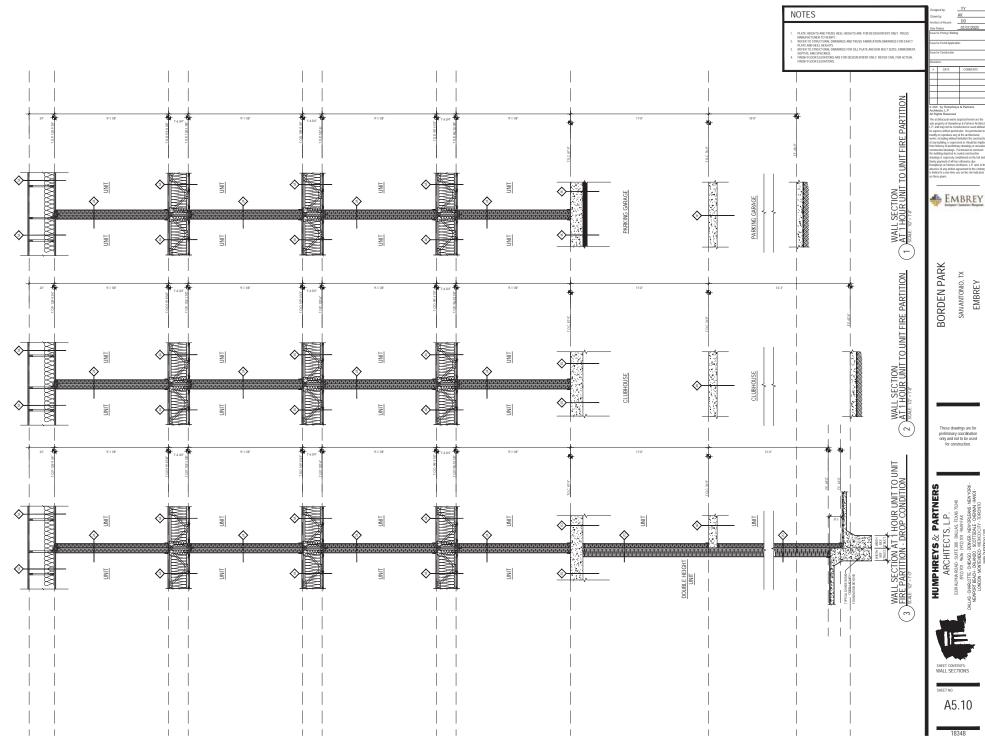



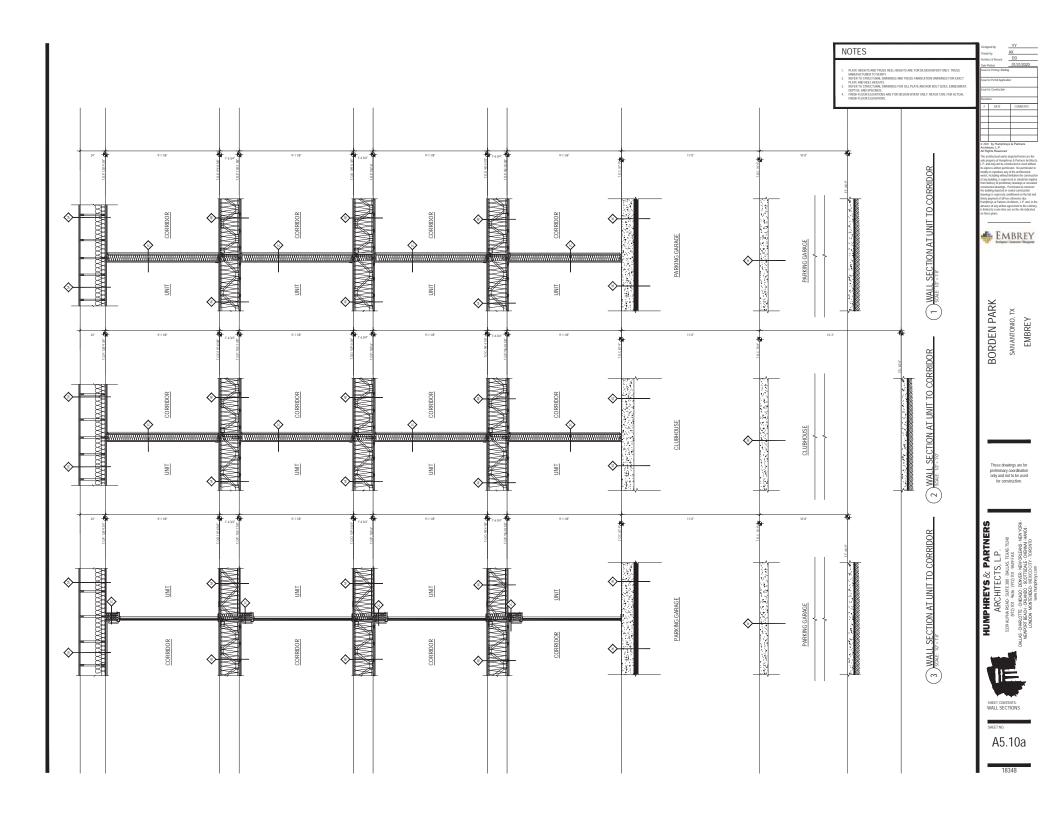

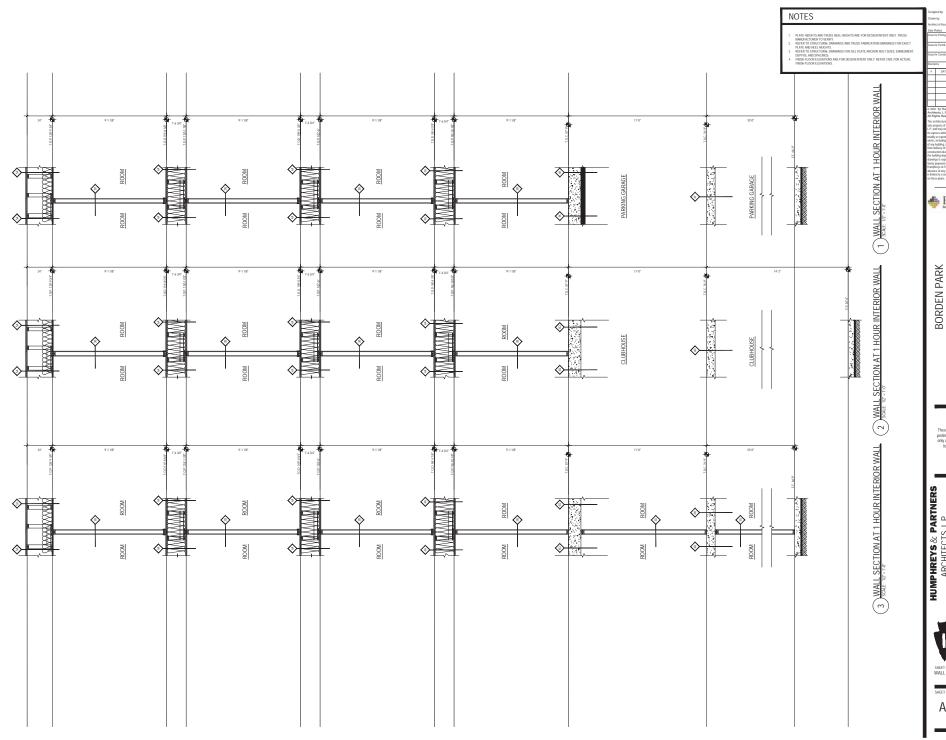

SANANTONIO, TX EMBREY


These drawings are for preliminary coordination only and not to be used for construction.

HUMPHREYS & PARTNERS
ARCHITECTS, L.P.
SSW ALPH ROLD STITED DALLS TENDERSON
DALLS CHROLTE: CHROLD STITED WITH ALPHANIST CHROLD STITED STITED WITH A CHROLD STITED STITED WITH A CHROLD STITED ST



SHEET CONTENTS: WALL SECTIONS

A5.10b

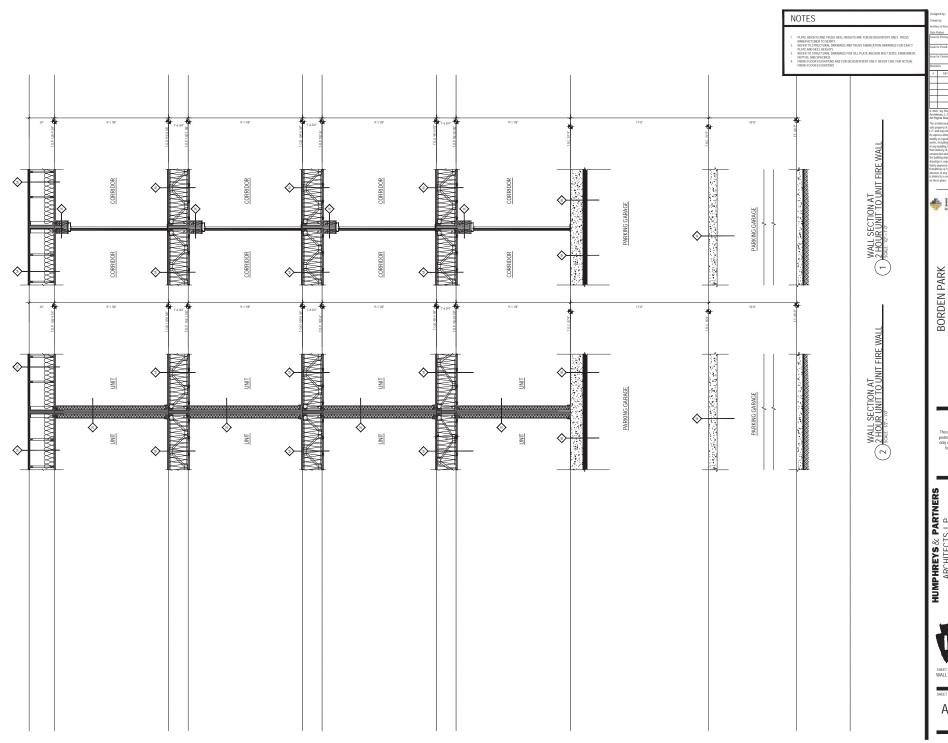

SANANTONIO, TX EMBREY

These drawings are for preliminary coordination only and not to be used for construction.

HUMPHREYS & PARTNERS


ARCHITECTS, L.P.


SERVICH ROLD SULTED DULLS TEXAS TO THE PARTNERS OF T





A5.10c

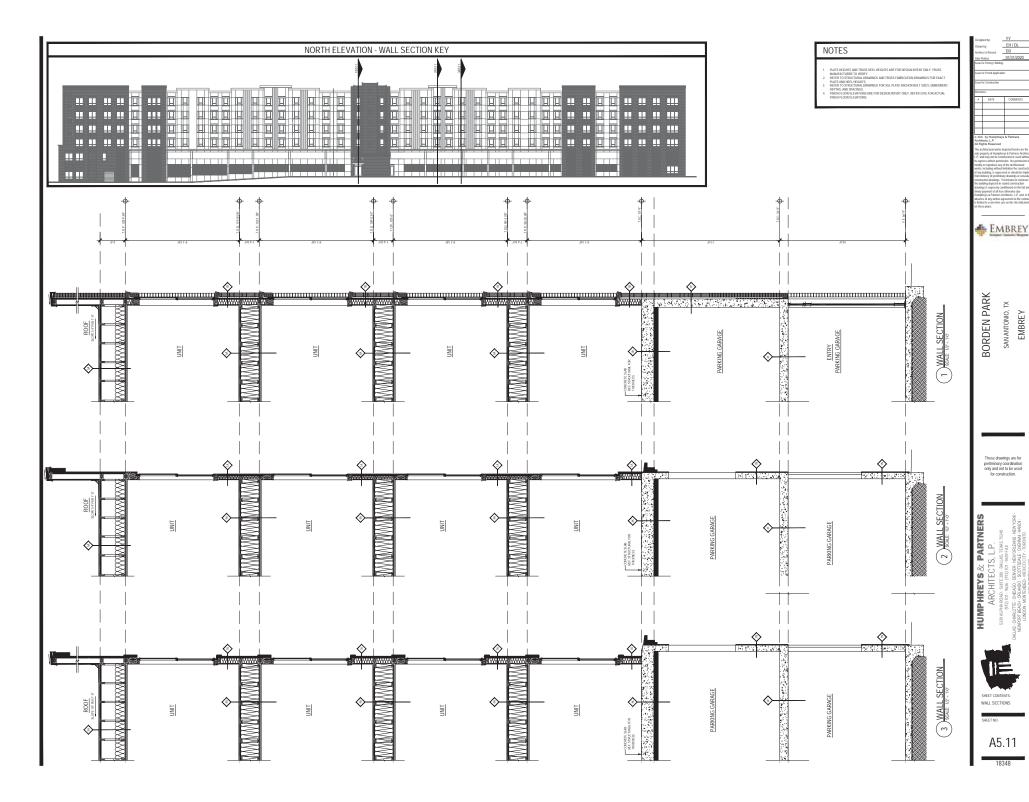

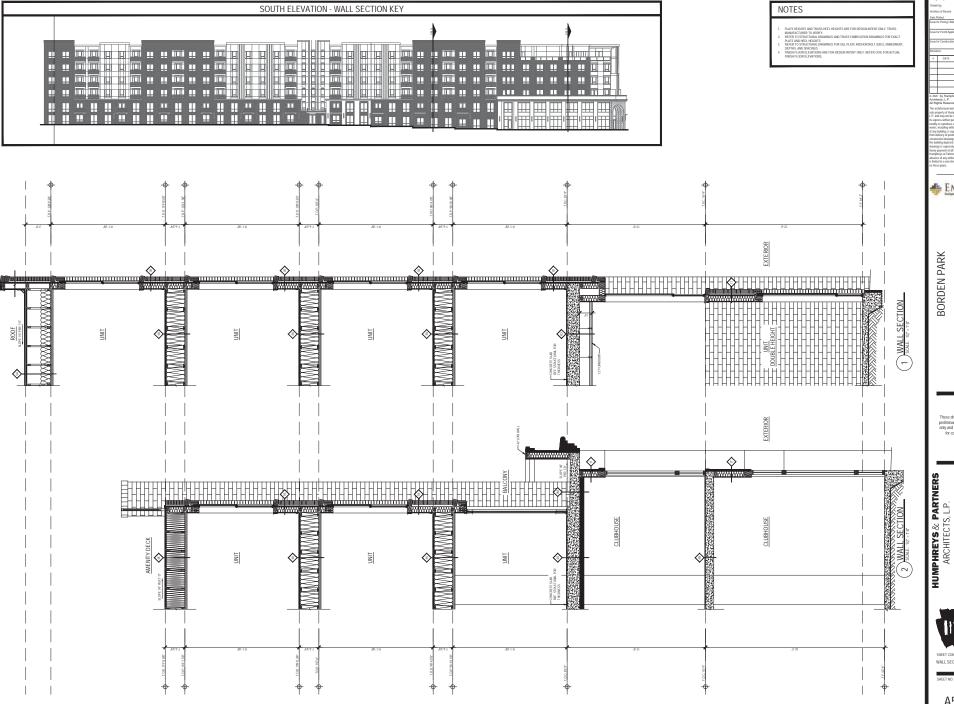



SANANTONIO, TX EMBREY


These drawings are for preliminary coordination only and not to be used for construction.



A5.12

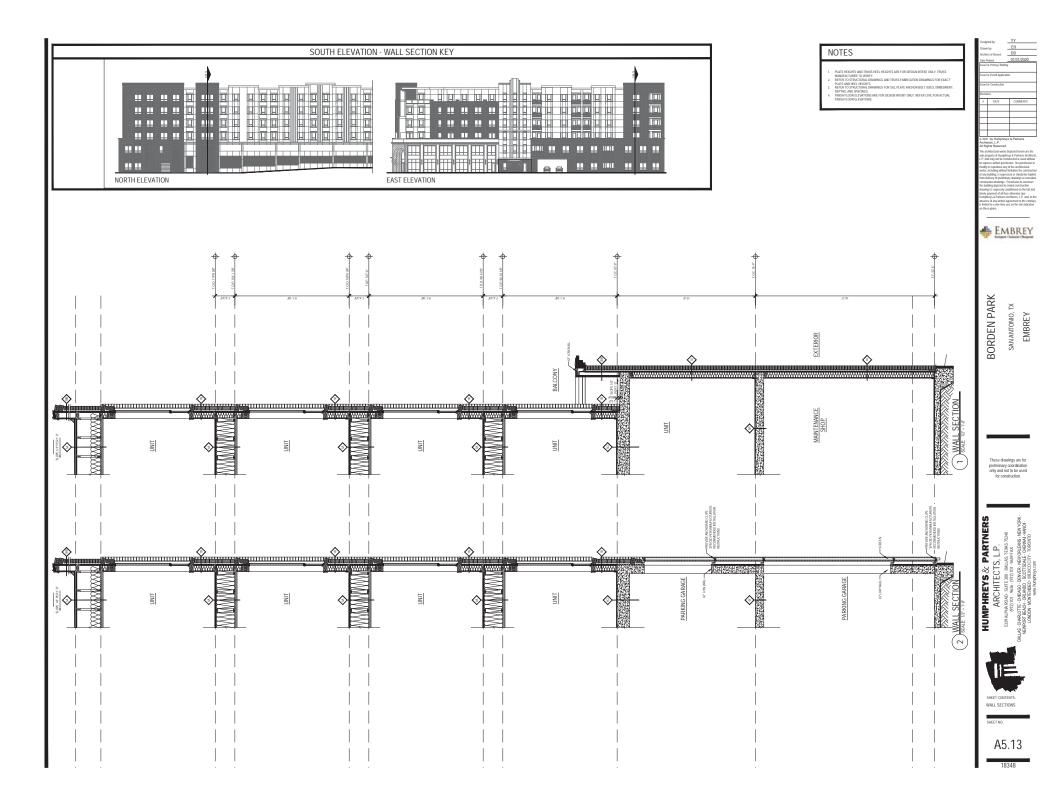


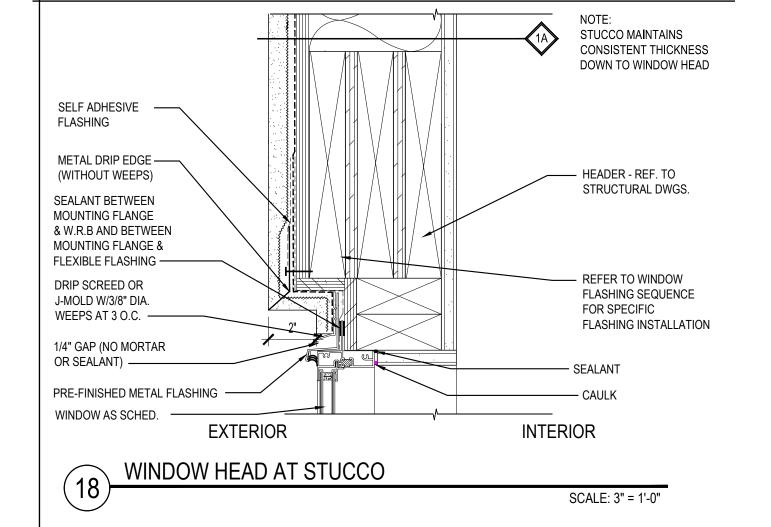

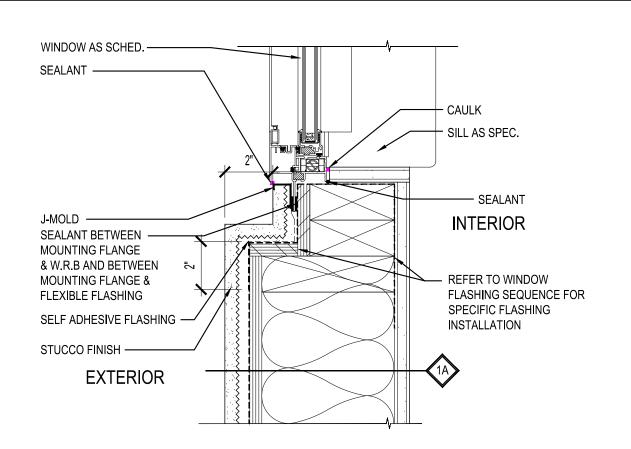

WINDOW JAMB AT STUCCO

SCALE: 3" = 1'-0"

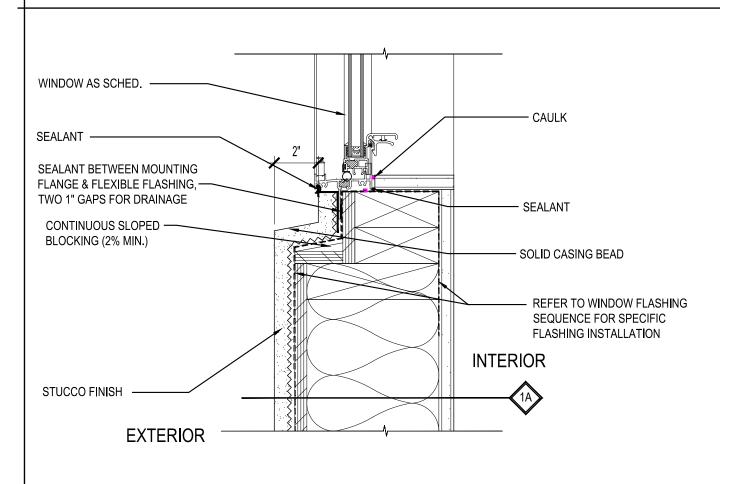

# **Other Supporting Documents**

HDRC Application – 815 E. Ashby & River Way

Property Identification #: 139604

Geo ID: 03053-000-0110

Situs Address: 815 E ASHBY PL SAN ANTONIO, TX 78212

Property Type: Real State Code: F1 Property Information: 2020

Legal NCB 3053 BLK LOT 11, 12, 13 & 14 (4.635 AC) & P-100 (0.142 AC) & P-101 (0.3304 AC) TOTAL:

5.1074 AC

Abstract: S03053

Neighborhood: NBHD code10480

Appraised N/A


Jurisdictions: 10, SA031, 11, 21, 06, CAD, 09, 08, 57

Owner Identification #: 3205540

Name: BORDEN RIVER ROAD LP

Exemptions:

DBA: SMARTSTOP SELF STORAGE

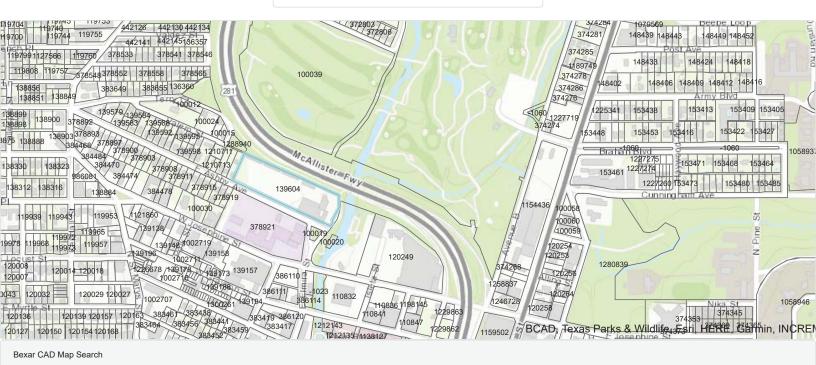

This product is for informational purposes only and may not have been prepared for or be suitable for legal, engineering, or surveying purposes. It does not represent an on-the-ground survey and represents only the approximate relative location of property boundaries. The Bexar County Appraisal District expressly disclaims any and all liability in connection herewith.

2019 💠

## Property

**Account** 

Property ID: 139604 Legal Description: NCB 3053 BLK LOT 11, 12, 13 & 14 (4.635 AC) & P-100

(0.142 AC) & P-101 (0.3304 AC) TOTAL: 5.1074 AC

Geographic ID: 03053-000-0110 Zoning: IDZ-3

Type: Real Agent Code: 60074

Property Use Code: 334

Property Use Description: HYBRID MINI-WAREHOUSE

**Protest** 

Protest Status: Informal Date: Formal Date:

Location

Address: 815 E ASHBY PL Mapsco:

SAN ANTONIO, TX 78212

Neighborhood: NBHD code10480

Neighborhood CD: 10480

Owner

Name: SSGT BORDEN PARK LLC Owner ID:

Mailing Address: PTA - EX # 8623 % Ownership: 100.0000000000%

PO BOX 320099

**ALEXANDRIA, VA 22320-4099** 

Exemptions:

Map ID:

616F2

2985144

### Values

(+) Improvement Homesite Value: + \$0

(+) Improvement Non-Homesite Value: + \$7,736,690

(+) Land Homesite Value: + \$0

(+) Land Non-Homesite Value: + \$3,737,640 Ag / Timber Use Value

(+) Agricultural Market Valuation: + \$0 \$0

(+) Timber Market Valuation: + \$0 \$0

(=) Market Value: = \$11,474,330

(–) Ag or Timber Use Value Reduction: – \$0

(=) Appraised Value: = \$11,474,330

(–) HS Cap: – \$0

\_\_\_\_\_

(=) Assessed Value: = \$11,474,330

### Taxing Jurisdiction

Owner: SSGT BORDEN PARK LLC % Ownership: 100.0000000000%

Total Value: \$11,474,330

Entity	Description	Tax Rate	Appraised Value	Taxable Value	<b>Estimated Tax</b>
06	BEXAR CO RD & FLOOD	0.023668	\$11,474,330	\$11,474,330	\$2,715.74
08	SA RIVER AUTH	0.018580	\$11,474,330	\$11,474,330	\$2,131.93
09	ALAMO COM COLLEGE	0.149150	\$11,474,330	\$11,474,330	\$17,113.97
10	UNIV HEALTH SYSTEM	0.276235	\$11,474,330	\$11,474,330	\$31,696.12
11	BEXAR COUNTY	0.277429	\$11,474,330	\$11,474,330	\$31,833.11
21	CITY OF SAN ANTONIO	0.558270	\$11,474,330	\$11,474,330	\$64,057.74
57	SAN ANTONIO ISD	1.530950	\$11,474,330	\$11,474,330	\$175,666.25
CAD	BEXAR APPRAISAL DISTRICT	0.000000	\$11,474,330	\$11,474,330	\$0.00
SA031	San Antonio TIF #31 Midtown	0.000000	\$11,474,330	\$11,474,330	\$0.00
	Total Tax Rate:	2.834282			
				Taxes w/Current Exemptions:	\$325,214.86
				Taxes w/o Exemptions:	\$325,214.87

### Improvement / Building **Improvement** Commercial **State** F1 Living Value: \$84,683 sqft Code: #1: Area: Class Exterior Year Type Description **SQFT** CD Wall Built 2000 DLA1 Detached Living Area 1 A - NO WS 1004.0 → OPP **Detached Open Porch** 2000 64.0 → GAR **Detached Garage** 2000 400.0 2000 → DLA2 Detached Living Area 2 A - NO 524.0 Commercial State Living **Improvement** F1 sqft Value: \$19,376 #2: Code: Area: Class Year **Exterior Wall** Type Description SQFT Built CD → FEN S - A 0 **Fence** 2376.0 Improvement Commercial State Living Value: F1 saft \$431,946 #3: Code: Area: Class Year **Exterior Wall** Description **SQFT** Type CD Built \* - A 0 → CON Concrete 100850.0 **Improvement** Commercial State Living 104938.0 sqft **Value:** \$7,200,685 #4: Code: Area: Class Exterior Year **SQFT** Type Description CD Wall Built **401** OFFICE BSMT/STORAGE USABLE B - A **RC** 1930 8304.0 **+** 400 **OFFICE RC** 1930 8304.0 **B** - A **→** 335 **MINI-WAREHOUSE** C - A RC 1930 27880.0 **→** 335 **MINI-WAREHOUSE C** - A **RC** 1935 11110.0 → SHI Implement Shed **C** - A **RC** 1935 648.0 **→** 336 HIGH RISE MINI WHSE **B** - A **RC** 1935 6608.0 → 336 HIGH RISE MINI WHSE **RC** 1935 3780.0 **B** - A → CNP \* - A 0 120.0 Canopy 1935 **→** 400 **OFFICE B** - A **RC** 184.0

→ 305	MANUFACTURING - LIGHT	C - A	TS	1980	4320.0
→ 335	MINI-WAREHOUSE	C - A	СВ	2000	2900.0
→ 335	MINI-WAREHOUSE	C - A	СВ	2000	2900.0
→ 335	MINI-WAREHOUSE	C - A	СВ	2000	2900.0
→ LDK	Loading Dock	* - A		1935	1841.0
$\longrightarrow$ CNP	Canopy	* - A		1935	105.0
→ 335	MINI-WAREHOUSE	C - A	СВ	2000	3600.0
→ 335	MINI-WAREHOUSE	C - A	СВ	2001	9874.0
→ 335	MINI-WAREHOUSE	C - A	СВ	2001	9874.0
→ 335	MINI-WAREHOUSE	C - A	СВ	2001	600.0
→ 335	MINI-WAREHOUSE	C - A	CB	2001	600.0
→ 335	MINI-WAREHOUSE	C - A	CB	2001	600.0
→ 335	MINI-WAREHOUSE	C - A	CB	2001	600.0
$\longrightarrow$ CNP	Canopy	* - A		2001	132.0
$\longrightarrow$ CNP	Canopy	* - A		2001	40.0

## Land


#	Type	Description	Acres	Sqft	Eff Front	Eff Depth	Market Value	Prod. Value
1	CSS	Commercial Store Site	5.1074	222478.34	0.00	0.00	\$3,737,640	\$0

## Roll Value History

Year	Improvements	<b>Land Market</b>	Ag Valuation	Appraised	HS Cap	Assessed
2020	N/A	N/A	N/A	N/A	N/A	N/A
2019	\$7,736,690	\$3,737,640	0	11,474,330	\$0	\$11,474,330
2018	\$7,914,680	\$3,559,650	0	11,474,330	\$0	\$11,474,330
2017	\$8,804,590	\$2,669,740	0	11,474,330	\$0	\$11,474,330
2016	\$9,781,050	\$1,018,950	0	10,800,000	\$0	\$10,800,000

## Deed History - (Last 3 Deed Transactions)

#	<b>Deed Date</b>	Туре	Description	Grantor	Grantee	Volume	Page	<b>Deed Number</b>
1	10/17/2019	SWD	Special Warranty Deed	SSGT BORDEN PARK LLC	BORDEN RIVER ROAD LP			20190210291
2	12/22/2015	SWD	Special Warranty Deed	BORDEN PARK LP	SSGT BORDEN PARK LLC	17637	1966	20160002117
3	4/16/2012	SWD	Special Warranty Deed	ARRINGTON DAVID H	BORDEN PARK LP	15447	667	20120070395

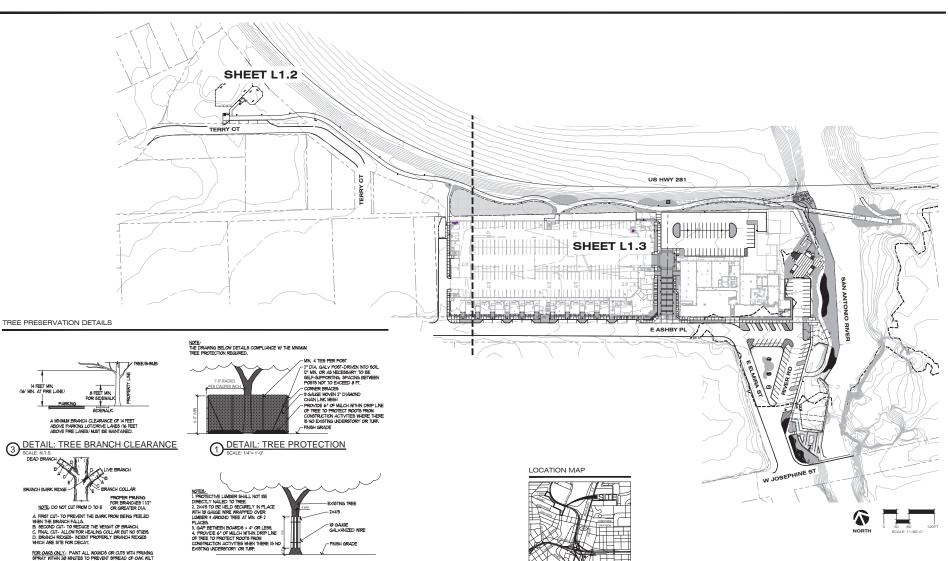

### TREE PRESERVATION NOTES

DETAIL: BRANCH PRUNING
SCALE: N.T.S.

- ALL TREES SHALL REMAIN UNLESS NOTED ON THE PLANS.

DETAIL: 2X4 TREE PROTECTION

- 1. ALL TREES SHALL REMAIN UNLESS NOTED ON THE PLANS.
  2. NO SITE PREPARATION WORK SHALL BEIGHT IN AREAS WHERE TREE PRESERVATION AND TREATMENT MEASURES HAVE NOT SEEN COMPLETED.
  3. NO SITE PREPARATION WORK SHALL BEIGHT IN AREAS WHERE TREE PRESERVATION AND TREATMENT MEASURES HAVE NOT SEEN TO SHALL BE DETERMINED BY TREE SIZE (RECOMMENDED 12' RADIUS FROM TRUNK FOR EVERY 1' IN DIAMETER FOR POST 1' IN DIAMETER FOR POST

### TREE RELOCATION NOTES

- PRIOR TO DIGGING TREES, EXCAVATE NEW PLANTING PITS WITH VERTICAL SIDES AND SLIGHTLY RAISED CENTERS. LOOSEN SUBSOIL IN BOTTOM. REFER TO TREE

- 1. PRIOR TO DIGGING TREES, EXCAVATE NEW PLANTING PITS WITH VERTICAL SIDES AND SLIGHTLY PASSED CENTERS. LOOSEN SUBSOIL IN BOTTOM. REFER TO TREE PLANTING NOTES IN SPECIFICATIONS.

  2. USE SOIL EXCAVATED FROM NEW TREE LOCATIONS TO SPEIL HOLES GREATED BY TREES BEING LOCATED. FILL HOLE WITH SOIL AND COMPACT TO MATCH SURPROLINGING GRADE. COORDINATE BACKFILL MATERIAL WITH RECOTED HANGINGER PRIOR TO PLACEMENT.

  3. PRIOR TO DIGGING, TIMM TREES SELECTIVELY, ON ADVICE OF ARBORIST. MOISTEN BALL AREA THOROUGHLY AT LEAST TWO DAYS BEFORE DIGGING, WITH APPROXIMATELY 2D DALLEDON FOR TOOL TO THOROUGHLY AT LEAST TWO DAYS BEFORE DIGGING, WITH APPROXIMATELY 2D DALLEDON FOR TOOL TO THOROUGHLY AT LEAST TWO DAYS BEFORE DIGGING, WITH EXPLOSIVE DAYS AND WITH BALLS AND WITH BALLS THOR TO STAP THE TABLE STAPPING SYSTEM THAT SUPPORTS THE BALL AND UTILIZES A MINIMUM OF FOUR STRAPPS, CONNECT CRANS CABLE LOCK TO STRAP LIFT ON BALL (NOT TREE THUM), PAD VULLEBLE UNPROTECTED THUM KAREAS, PROTECT BALL FROM CRACKING OR BREANING APART.

  5. LIFT TREE, MANTANINIST IN A VERTICAL POSITION, AND SET IT ONTO FLAT BED TRAILER. KEEP ROOT BALL MOIST. DO NOT LIFT TREE BY STRAPS WRAPPED

  6. IF FLANTING IS DELAYED MORE THAN SIX HOURS FROM TIME OF DIGGING, SET BALLED AND BUFLAP STOOK ON THE GROUND, HEEL THEM IN, AND BACKFILL AND COVER THE FOOT BALL AND THIN MILLOH WATER AS NECESSARY TO PREVENT BOY TO FRALL FROM THING OUT.

  7. TO PLANT TREES, SET THE ROOT BALL ON LAYER OF COMPACTED PLANTING SOIL MIX, PULING AND IN CENTER OF THIN WITH NO POSITION, SPECIFIED IN THE PLANS. LOOSEN BUFLAR AT BASE OF TRAIL WITH WITH SET THE PROVIDENT OF THE SETTLE BY A PROVIDED BY THE PLANTING SOIL MAY PROVIDED BASE AND SIDES OF BALL AND WORK WATER IS ASSOCIATED. BY THE PLANTING SOIL MAY PROVIDED BY THE AND THE CHARLS THE PLANTING SOIL MAY PROVIDED BY THE OFFI WITH TOP OF BALL AT ELEVATION SPECIFIED IN THE PLANS. LOOSEN BUFLAR AT BASE OF TRAIL WE WITH SETTLE SETTLE BY A PROVIDED BY THE PLANTING SOIL MAY PROVIDED BY THE SETTLE OF BALL AND MATER THOROUGH. YUNTIL NO MORE WATER IS ASSOCIATE
- ALIGNMENT.

  DO NOT LEAVE OPEN EXCAVATED TREE HOLES OVERNIGHT WITHOUT COVER OR APPROPRIATE BARRICADES.



RIALTO


Drawn By MP Scale: AS SHOWN

Master Tree Preservation Plan

L1.1


AS SHOWN

L1.2

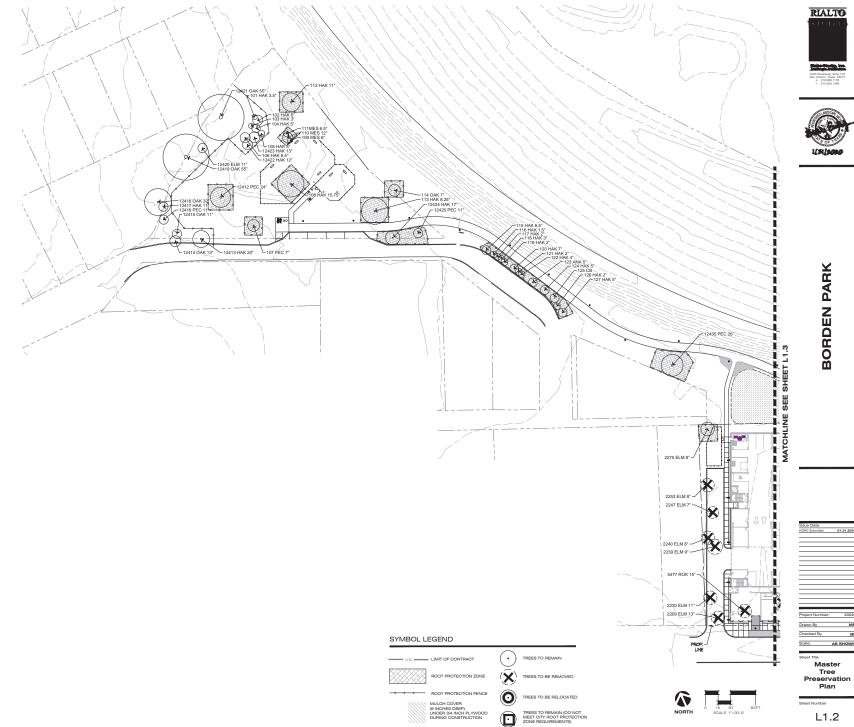





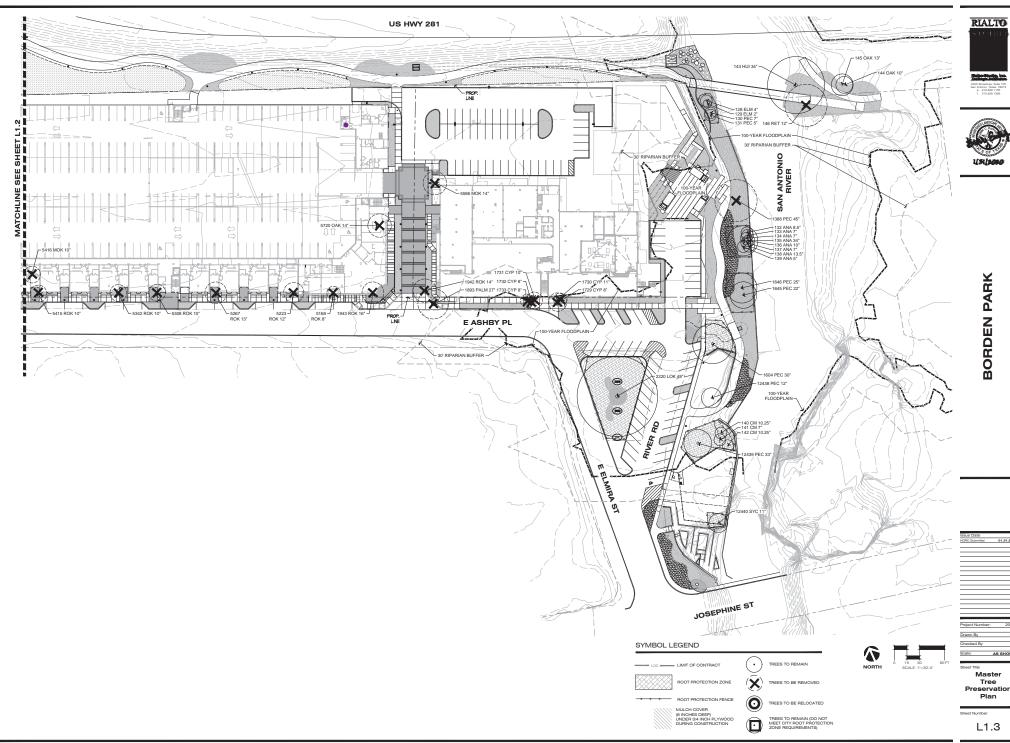

- 10									I		1		1
	5.0" - 1		Significan to 23	5"	Significan 10.0" - 2	23.5"	Heritag			tage 1:1		Trees 1:1	Undersized Trees ***
- 1	Removed	rreserved	Removed	Preserved	Removed	Preserved	sensoved	rreserved	Removed	Preserved	Remov	ed Preserve	Preserved 3.5
_		-		_		_				-	_		- 6
_				_									3
-		_		_						-			5
					2.					_			
													4
					7								0.5
				7	-								1 11 11
						15.75			-				
						-							- 6
_		_		_		12				_			-
_		-		_		14	_			_	_	_	6.5
_		_		_		11	_			_	_	_	0.0
_	-	_		_		- 11				-			8.25
										_			8.25
_	- 0			7		_							
					1.								6.5
					7-								1.5
													2
													3
_		-		_									2
_		_		_									7
_		_		_						_			1 2
_		_		_	-					_			2
					-								4
					100								5
													5
ve)													
		_											2
-		_		_		_				_			5
_		-		-		_	_		_	-	27	_	
_		_	14	_		_				-	21		_
_		_		_									-
			16		55							100	
			13										
			11										
			9										
			a.										_
_		_	7	_		_	_			_	_	_	_
_		_	8	_		_	_			-	_	_	-
_	-	-	. 0	-		_				_		_	_
_				8									
	- 0		8										
			12										
			13										-
			10										
			10							_			_
_		-	10			_				_			+
_		-	10			_			-	-	_	_	+
_		_	15	_	-					_	_		_
	-				- 1-					_			_
			14		25							- 1	
			14		17								
						20							
				13									
				- 11									
_		_		11		_				_			_
_		-		11		_				_			+
_		_		31				32		-			-
								32					_
								55					
				11				100				- 2	
					- 2	7.50		. 55					
						12							
					-	13							
_		_		_		17				_			_
-		-		11		17				_			+
_				315				- O.E.		-			+
								26					_
- 2													
	0	0		90	0	100.75	0	168			0		0 93.7
	1	0	-7.630	292	- 3	100.75		168		1	0	1	7
13				1000				-			d)	3.1	100
	0%				49%					2%		0%	1
F				- 1									
ercial)	0	_			-33.6	10				0		27	1
	-6.6	5											
	s root prote												
	slow minimu	m preservati	on requiremen	ts: 3.7 for h	entage frees I	relow 100% pr	eservation						
of trees be-													
that me	ed	ets root prote	ets root protection zone n below minimum preservati	ets root protection zone requirements di below minimum preservation requiremen	ets root protection zone requirements described in a below minimum preservation requirements, 3.1 for h	ets root protection zone requirements described in section 35:52; below minimum preservation requirements; 3:f for heritage trees I	ets root protection zone requirements described in section 35-523 of the UDC. below minimum preservation requirements, 3.1 for heritage trees below 100% pr	ets root protection zone requirements described in section 35:523 of the UDC. below minimum preservation requirements; 3.1 for heritage trees below 100% preservation.	ets root protection zone requirements described in section 35:523 of the UDC. below minimum preservation requirements; 3:1 for heritage trees below 100% preservation	ets root protection zone requirements described in section 35:523 of the UDC. below minimum preservation requirements; 3:1 for heritage trees below 100% preservation	ets root protection zone requirements described in section 35.523 of the UDC. below minimum preservation requirements, 3.1 for heritage trees below 100% preservation	ets not protection zone requirements described in section 35:523 of the UDC. below minimum preservation requirements: 3.1 for heritage trees below 100% preservation	ets root protection zone requirements described in section 35-523 of the UDC.

					FLOO	DPLAIN	TREE IN	VENTOR	RY					
		Understor 5.0* -	y Species* 11.5*	Signific to 2	ant Tree	Significa 10.0*		Herita	ge 3:1	Heri	tage 1:1	City Tr	ees 1:1	Undersized Trees ***
Tag #	Species	Removed	Preserved	Removed	Preserved	Removed	Preserved	Removed	Preserved	Removed	Preserved	Removed	Preserved	Preserved
	Cedar Elm													4.
	Cedar Elm													2
	Pecan				7									100
	Pecan				5		_	1				5 5		
	Anacua				8.5		_		_	_		1		
	Anacua				7									
	Anacua		_	-	7		_	-			_	-	_	
	Anacua								34					_
	Anacua				10		_	_						
	Anacua		_				_		_		_		_	_
	Anacua		-	_	13.5		_		-		-		-	
	Anacua				10.25				_	_			_	
	Crape Myrtle		_		7		_		_		_		_	
	Crape Myrtle	_	-				_	-	_	_	-		_	_
	Crape Myrtle				10.25		-		-		34			_
	Huisache				- 10		_		_	_	34		-	_
	Live Oak			_	10		_	-	_	_	_		_	_
	Live Oak Retama				- 13				-				-	_
	Pecan			12	_		_		_	_		-	_	
	Pecan		_	_	_		_	45	- 30	_	_		-	_
			_	8			_		30		_		_	_
	Italian Cypress			11	_		_	_	_	_		_	-	_
	Italian Cypress		_	10	_		_		-		_		_	_
	Italian Cypress Italian Cypress			8	_		_	_	_	_			-	_
	Italian Cypress		_	8			_	_	-	_	_		-	_
	Live Oak		_		_		_	_	48	_	_		_	_
	Pecan Pe		_		_		_	_	33	_	_		_	_
	Sycamore	_	-	-	- 11		_	_	33	_	_	-	_	_
12.040	Dycamore													
	ot, Inches*	- 0				- (								
Total is	nches by category=		0		188.5		0		190		34		0	
			1		10000			10		199	~		31 37	
Presen	ation percentage*	. 0	%			70	7%			80	7%		%	
Mtigati	on required (Commercial)		0			19	3.3			- 1	35		0	1
Total M	litigation (inches)	15	4.3											
Present Mitigati * Small ** Ashe *** Und	egory to fall below 10% pre- red. Tree to remain that mon 1:1 for significant trees species: Condelia, Redbu - Juniper, Huisache, Mesq- lersized Trees: Unprotecte res to remain that do not m	eets root prot below minim vd. Tx. Mount uite, Arizona d-sized trees	um preserva ain Laurel, T. Ash, Hackbi as measure	tion requirem ix. Persimmon erry protected d at 4.5 feet i	ents: 3:1 for i 1. Heathom, i 1 at 10" dbh a sbove grade,	neritage trees Possumhaw- ind mitigated per code; No	below 100% these are m at 1:1 for he trunk meets	preservation trigated at 1: ritage trees	for Heritage	Trees				





Issue Date
ICPV Bermitel 01.91.8980

POPE Bermitel 01.91.8980

Project Number: 20026

Master
Tree
Preservation
Plan

BE AS SHOWN

Sheet Number



GENERAL CONSTRUCTION NOTES:

SHEET L2.3

SHEET L2.2

TERRY CT

- 1. THE GENERAL CONTRACTOR SHALL SCHEDULE A PRE-CONSTRUCTION CONFERENCE WITH LANDSCAPE ARCHITECT PRIOR TO MOBILIZATION TO DISCUSS AND MARK ALL TREES TO BE PROTECTED AND REMOVED.
- 2. THE GENERAL CONTRACTOR SHALL NOTIFY LANDSCAPE ARCHITECT OF ANY EXISTING CONDITIONS THAT PREVENT CONSTRUCTION AS DETAILED.

E ASHBY PL

- 3. ALL DIMENSIONS MUST BE VERIFIED ON SITE. NOTIFY THE LANDSCAPE ARCHITECT IF THERE ARE ANY DISCREPANCIES BEFORE PROCEEDING WITH THE WORK.
- 4. CONTRACTOR SHALL IMMEDIATELY NOTIFY THE LANDSCAPE ARCHITECT OF ANY QUESTIONS THAT MAY ARISE CONCERNING THE INTENT, PLACEMENT, OR LIMITS OF DIMENSIONS NECESSARY FOR THE CONSTRUCTION OF THIS PROJECT.
- 5. THE GENERAL CONTRACTOR IS RESPONSIBLE FOR ESTABLISHING SUBGRADE FOR ALL HARDSCAPE AND PLANTING AREAS. DO NOT EXCAVATE IN THE ROOT PROTECTION ZONE OF EXISTING TREES. SEE SHEET L4.1 FOR PLANTING AREA AND TURF AREA SUBGRADES.
- 6. CONTRACTOR SHALL ALERT LANDSCAPE ARCHITECT WHEN SUBGRADE HAS BEEN ESTABLISHED, FOR REVIEW PRIOR TO BACKFILLING WITH SOIL MIX.
- 7. PRIOR TO MAKING ANY EXCAVATION, CONTACT ALL UTILITY COMPANIES TO LOCATE UNDERGROUND UTILITIES.
- 8. CONTRACTOR SHALL TAKE STEPS NECESSARY TO PROTECT UTILITIES AND EXISTING FENCING AT ALL
- 9. VERIFY ALL R.O.W. DIMENSIONS WITH APPROPRIATE JURISDICTION.
- 10. WHERE PAVING MEETS STRUCTURES, A CONTINUOUS EXPANSION JOINT WILL BE REQUIRED.


01.31.2

30 60 SCALE: 1"=60'-0"

Project Number	2002
Drawn By	МІ
Checked By	В
Scale:	AS SHOW

Master Reference Plan

Sheet Number

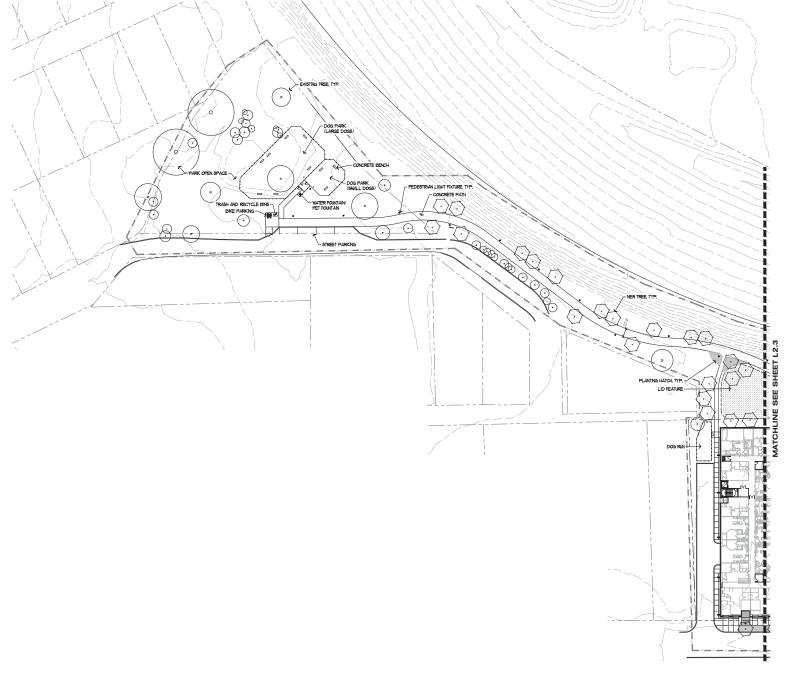












L2.2

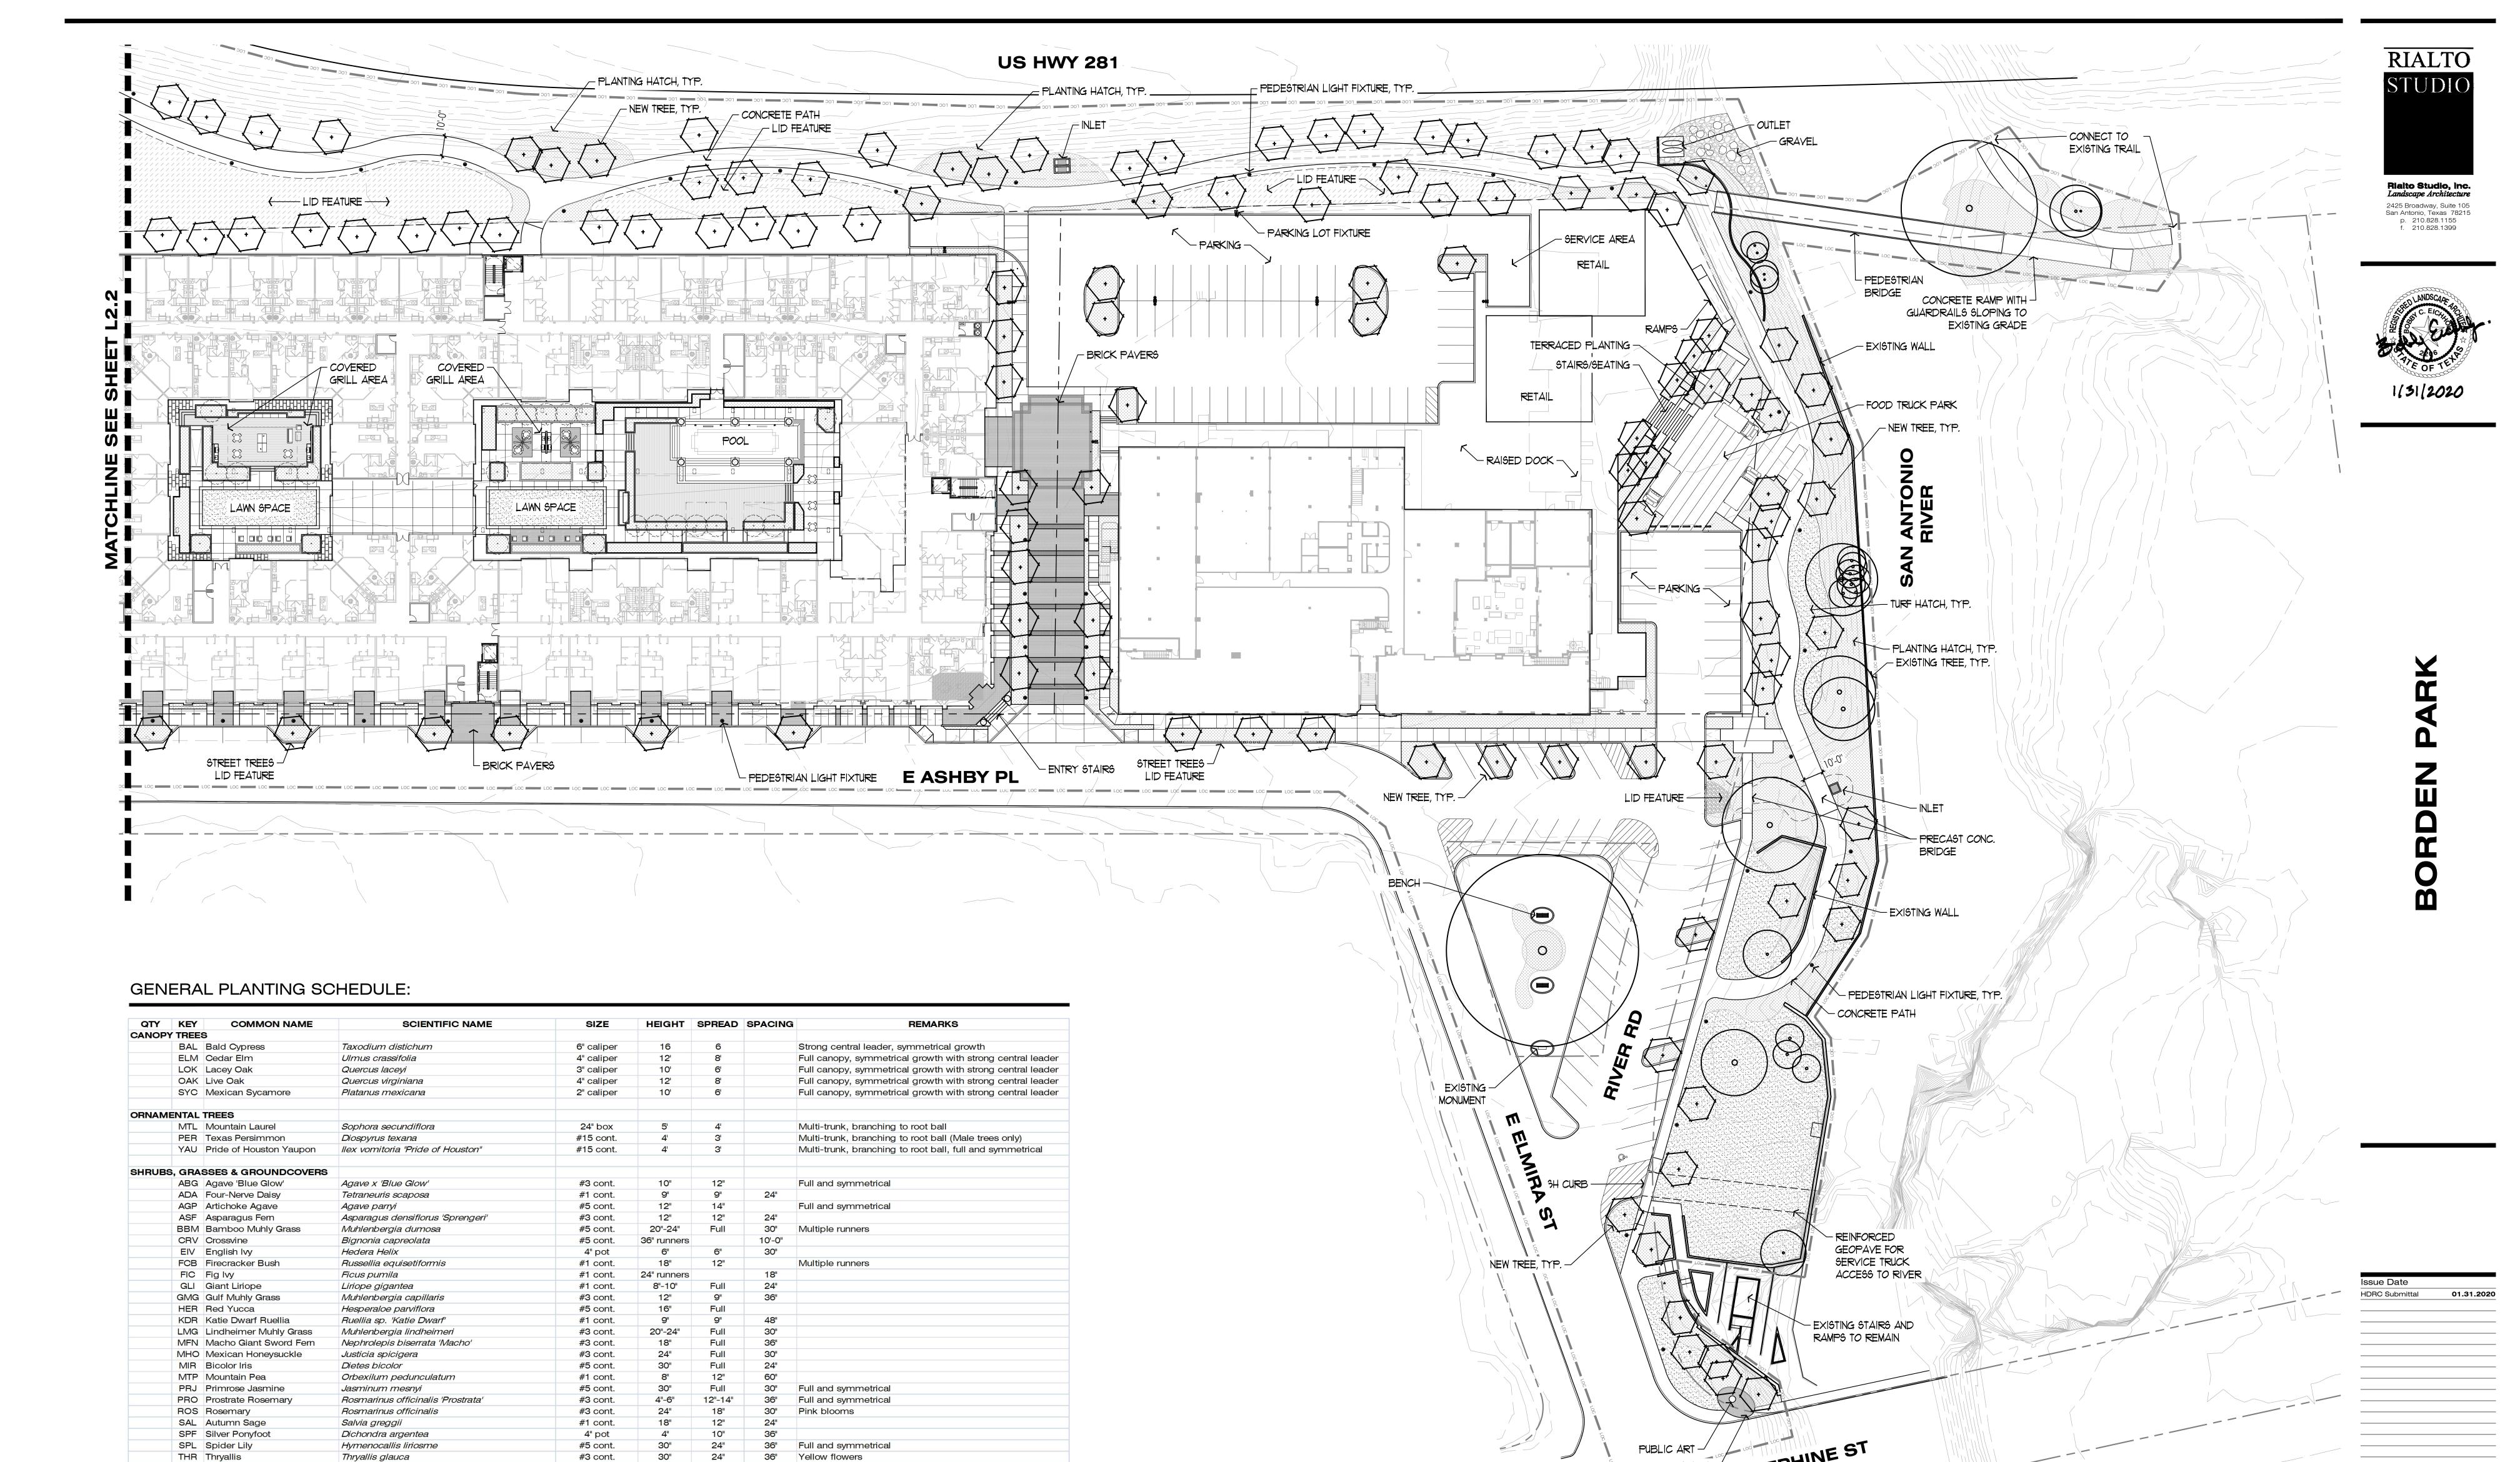

PLANTING QUANTITY NOTE
Landscape Contractor shall provide and install 12" of planting mix and 4" mulch for the entire hatched area. Landscape Contractor shall provide and install the following plants based on container size

TLA New Gold Lantana

VIB Sandankwa Viburnum

TUR Turk's Cap

**TURFGRASS** 

per 100 sq ft:

(1) #15 container shrubs(9) #5 container shrubs(30) #1 container ground covers

BER Common Bermuda Grass Cynodon dactylon

BER Common Bermuda Grass Cynodon dactylon

Lantana sp. 'New Gold'

Vibumum suspensum

Malvaviscus arboreus 'drummondii'

#1 cont

#3 cont.

#5 cont.

Sod (SF)

Seed (SF)

15 30 60FT

NORTH

15 30 60 FT SCALE: 1"=30'-0" Sheet Title

Site Plan

Master

Project Number:

AS SHOWN

Drawn By

Checked By

. .

Sheet Number

L2.3